



The FS500 Series flash rate is adjustable from 10 to 100 FPM. A locknut is provided to hold selected flash rate. The long-life electronic circuit combined with a quality electromechanical relay provides flexibility and reliability in most applications.

### Operation

Upon application of input voltage, the output relay is energized and the ON time begins. At the end of the ON time, the output relay de-energizes and the OFF time begins. At the end of the OFF time, the output is energized and the cycle repeats as long as input voltage is applied. Reset: Removing input voltage resets the output and the sequence.

For more information see:  
Appendix A, page 164 for Flasher (ON First-DPDT) function.  
Appendix B, page 165, Figure 9 for dimensional drawing.  
Appendix C, page 168, Figure 8 for connection diagram.

### Order Table:

Input Voltage	Part Number
12VDC	FS512
24VAC/DC	FS524
120VAC/DC	FS590
230VAC	FS599

### Specifications

Technical Data	
Operation	ON/OFF recycling flasher with adjustable flash rate
Flash Rate	Adjustable from 10 - 100 operations per minute (guaranteed range)
ON/OFF Ratio	≈ 50%
<b>Input</b>	
Input Voltage	12VDC, 24VAC/DC, 120VAC/DC, 230VAC
Tolerance	12VDC & 24VDC/AC .....-15% - 20%
	120 - 230VAC/DC .....-20% - 10%
AC Line Frequency	50/60Hz
<b>Output</b>	
Load Type	Electromechanical relay

Form	.....DPDT
Rating	.....10A resistive @ 120/240VAC & 28VDC; 1/3 hp @ 120/ 240VAC
<b>Mechanical</b>	
Mounting	.....Plug-in socket
Dimensions	.....3.62 x 2.39 x 1.78 in. (91.6 x 60.7 x 45.2 mm)
Termination	.....Octal 8-pin plug-in
<b>Protection</b>	
Isolation Voltage	.....≥ 1500V RMS input to output
Polarity	.....DC units are reverse polarity protected
<b>Environmental</b>	
Operating / Storage Temperature	.....-20° to 60°C / -30° to 85°C
Weight	.....≈ 5.8 oz (164 g)

### Features:

- Solid-state circuitry - relay output
- Industrial standard octal plug-in
- Adjustable flash rate 10 - 100 FPM
- 10A, DPDT output contacts

Approvals: (some models)


### Auxiliary Products:

- **Panel mount kit:** P/N: BZ1
- **Octal 8-pin socket:** P/N: NDS-8
- **Hold-down clips (sold in pairs):** P/N: PSC8 (NDS-8)
- **DIN rail:** P/N: C103PM (AI)

### Available Models:

FS512  
FS524  
FS590

If desired part number is not listed, please call us to see if it is technically possible to build.

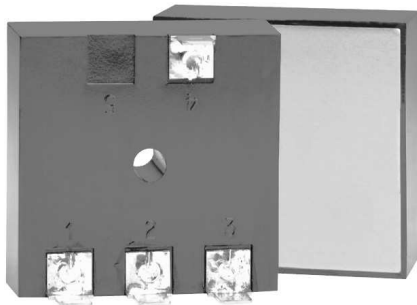

The AF Series offers a high inrush capacity of up to 200A. These devices exceed mechanical type relays in both performance and lifespan. The AF Series is constructed with no moving parts to arc, wear, and eventually fail; 100 million operations are typical. Circuitry is encapsulated to provide protection against vibration and moisture, making the AF Series ideal for outdoor applications.

### Operation

Upon application of input voltage T1 begins, Load 1 is ON and Load 2 is OFF. At the end of T1, T2 begins and Load 2 is now ON and Load 1 is OFF. At the end of T2, T1 repeats and this sequence continues until input voltage is removed. The duration of T1 and T2 is approximately equal.

Reset: Removing input voltage resets the flasher.

For more information see:  
Appendix A, page 164 for Flasher (Alternating) function.  
Appendix B, page 166, Figure 13 for dimensional drawing.  
Appendix C, page 168, Figure 7 for connection diagram.

### Order Table:

AF	X	X	X
Input Voltage	Output Rating	Flash Rate (flashes per min.)	
-1 - 24VAC	-1 - 6A	-1 - 10	
-2 - 120VAC	-2 - 10A	-2 - 30	
-3 - 230VAC	-3 - 20A	-3 - 60	
		-4 - 90	
		-5 - 120	
		-6 - 140	
		-Blank - Custom Flash Rate	

### Features:

- Alternately flashes two high current loads
- High surge capacity - up to 200A
- Small size - 2 x 2 x 1.30 in. (50.8 x 50.8 x 33 mm)
- Totally solid state & encapsulated

### Auxiliary Products:

- **Female quick connect:** P/N: P1015-13 (AWG 10/12)  
P/N: P1015-64 (AWG 14/16)  
P/N: P1015-14 (AWG 18/22)
- **Quick connect to screw adaptor:** P/N: P1015-18

### Available Models:

AF213  
AF223  
AF232  
AF233

If desired part number is not listed, please call us to see if it is technically possible to build.

### Specifications



Technical Data	
Operation	Alternating solid-state flasher rated (continuous duty)
Flash Rate	Factory fixed at 10, 30, 60, 90, 120, or 140 flashes per min. ±10%.
Custom Flash Rate	10 - 140 FPM
Ratio	≈ 50%
<b>Input</b>	
Input Voltage/Frequency	24, 120, or 230VAC ±15% / 50/60Hz
<b>Output</b>	
Load Type	Incandescent or resistive
Maximum Load Rating	.6, 10, & 20A steady state

Inrush	.....10 times steady state current
<b>Mechanical</b>	
Mounting*	.....Surface mount with one #10 (M5 x 0.8) screw
Dimensions	.....2 x 2 x 1.30 in. (50.8 x 50.8 x 33 mm)
<b>Protection</b>	
Circuitry	.....Encapsulated
<b>Environmental</b>	
Operating / Storage Temperature	.....-20° to 60°C / -40° to 85°C
Humidity	.....95% relative, non-condensing
Weight	.....≈ 2.9 oz (82 g)
*Must be bolted to metal surface using the included heat sink compound. The maximum mounting surface temperature is 90°C.	



# Appendix A - Timer/Flasher Functions

## Single Functions

### Retriggerable Single Shot

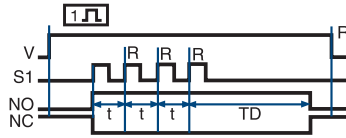



### Accumulative Delay-on-Make





## Dual Functions



### \* Recycle (OFF Time First) Both Times Adjustable

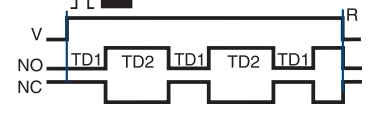


### \* Interval Delay-on-Make

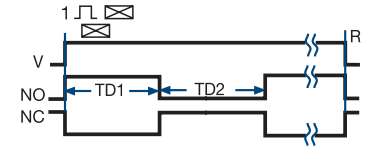

### Accumulative Delay-on-Make Interval

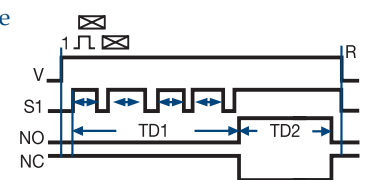

### KEY



V=Voltage, R=Reset, S1=Initiate Switch,  
NO=Normally Open Contact, NC=Normally Closed Contact,  
TD,TD1,TD2=Complete Time Delay, t=Partial Time Delay,  
DOM=Delay-on-Make, DOB=Delay-on-Break, REC=Recycle,  
SS=Single Shot, INT=Interval, M=Minutes, S=Seconds,  
= } Undefined time


5 Switches for Function Selection  
3 Switches for Time Delay Range

NOTE: The time delay range is the same for both functions when dual functions are selected.

\* 9 Functions included in the 8 pin DPDT models


## Flasher Function Diagrams

### Flasher (NC)

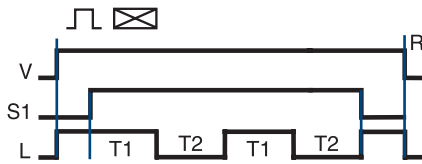


V = Voltage S1 = Initiate Switch L = Load  
R = Reset T1 = ON Time T2 = OFF Time  
T1 ≅ T2

### Flasher (OFF First)

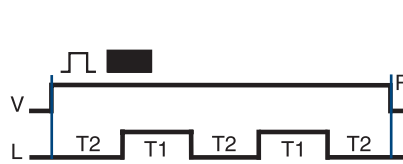


V = Voltage R = Reset L = Load  
T1 = ON Time T2 = OFF Time  
T1 ≅ T2

### Flasher (ON First)

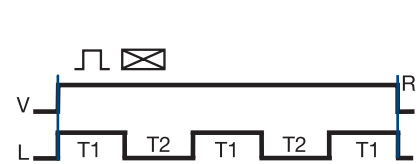


V = Voltage R = Reset L = Load  
T1 = ON Time T2 = OFF Time T1 ≅ T2  
ON time plus OFF time equals one complete flash.

### Flasher (Alternating)

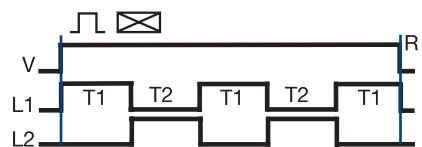


V = Voltage L1 = Load 1 L2 = Load 2  
R = Reset T1 = ON Time T2 = OFF Time  
T1 ≅ T2

### Flasher (ON First-DPDT)

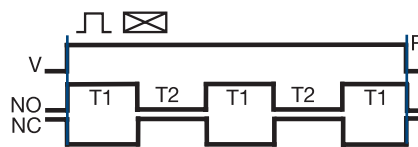

V = Voltage R = Reset  
T1 = ON Time T2 = OFF Time  
NO = Normally Open NC = Normally Closed


### Flasher (Chasing)

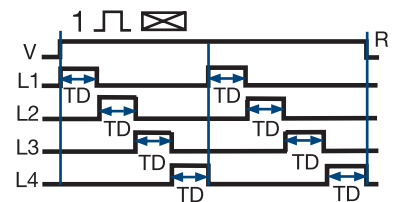

SC4 shown; SC3, L4 is eliminated  
and L1 TD begins as soon as L3 TD is  
completed.

V = Voltage R = Reset L (1...4) = Lamps  
TD = Time Delay (all are equal)


### Flashers & Aux. Modules

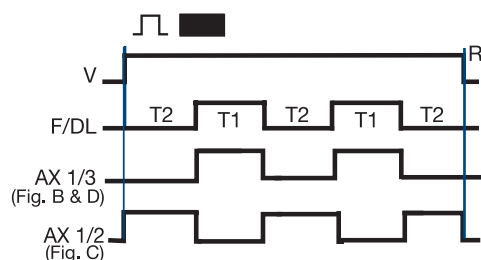

V = Voltage L = Load T1 = ON Time  
T2 = OFF Time R = Reset  
T1 ≅ T2

# Appendix B - Dimensional Drawings


**FIGURE 1**

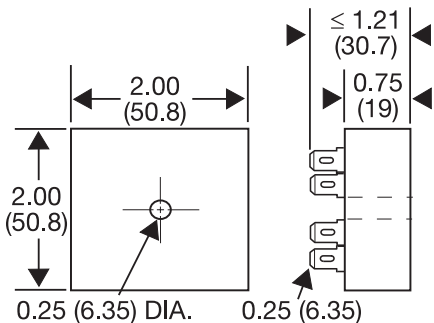

0.25 (6.35) DIA. 0.25 (6.35)


CT; ESD5; ESDR; FS100; FS200; FS300; KR3; KR9;  
KRDB; KRDI; KRDM; KRDR; KRDS; KRPD; KRPS;  
KSD1; KSD2; KSD3; KSD4; KSDB; KSDR; KSDS;  
KSDU; KSPD; KSPS; KSPU; KVM; T2D; TA; TAC1;  
TAC4; TDU; TDUB; TDUI; TDUS; TL; TMV8000;  
TS1; TS2; TS4; TS6; TSB; TSD1; TSD2; TSD3; TSD4;  
TSD6; TSD7; TSDB; TSDR; TSDS; TSS; TSU2000

**FIGURE 2**

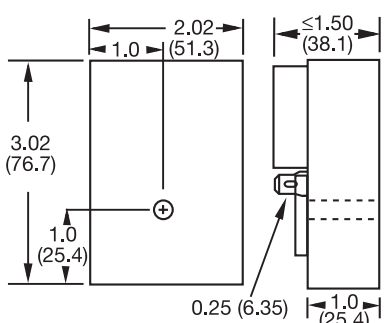


HLV; HRD3; HRD9; HRDB; HRDI;  
HRDM; HRDR; HRDS; HRID; HRIS;  
HRIU; HRPD; HRPS; HRPD; HRV; RS

**FIGURE 3**

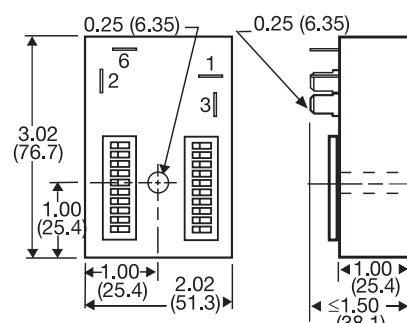

HSPZ


**FIGURE 4**

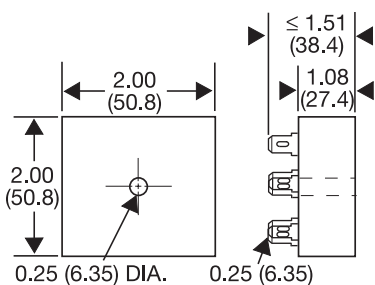

FA; FS; FSU1000\*; NHPD; NHPS; NHPU;  
NLF1\*; NLF2\*; PHS\*; PTHF\*; SIR1; SIR2;  
SLR1\*; SLR2\*; TH1; TH2; THC; THD1;  
THD2; THD3; THD4; THD7; THDB; THDM;  
THDS; THS


\*If unit is rated @ 1A, see Figure 1

**FIGURE 5**

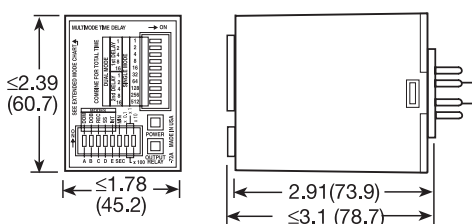


TRDU

**FIGURE 6**

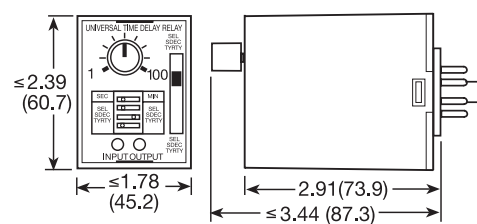


TRU

**FIGURE 7**

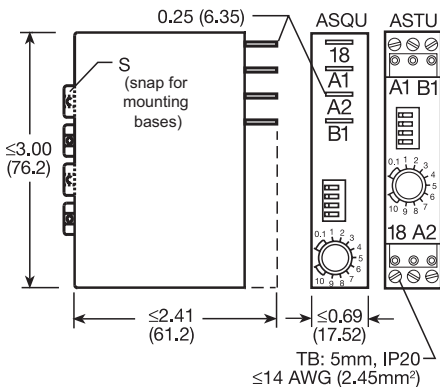


ASQU; ASTU; DSQU; DSTU

**FIGURE 8**

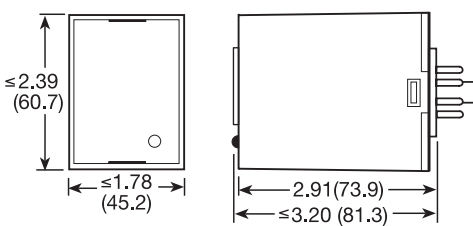


PLM; PLR; TDB; TDBH; TDBL; TDI; TDIH;  
TDIL; TDM; TDMB; TDMH; TDML; TDR;  
TDS; TDSH; TDSL

**FIGURE 9**

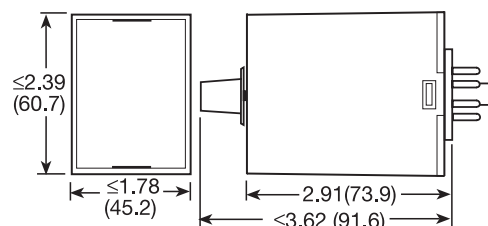


FS500; PRLB; PRM; PRLS; TRB; TRM; TRS

**FIGURE 10**

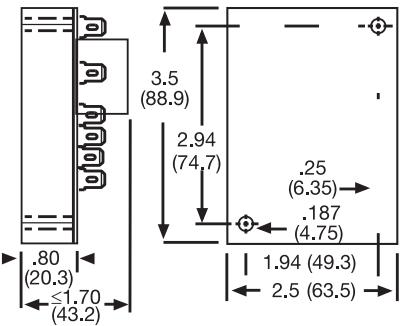


ERD3; ERDI; ERDM

**FIGURE 11**

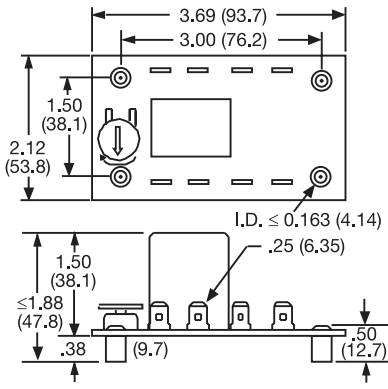

ORB; ORM; ORS

**FIGURE 12**




FS100; FS400


inches (millimeters)

# Appendix C - Connection Diagrams


**FIGURE 1 - FSU1000 Series**

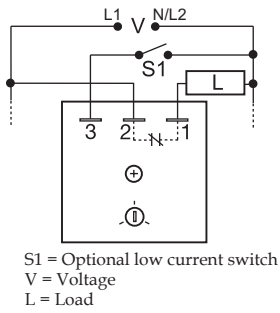


**FIGURE 2 - FS100 Series**

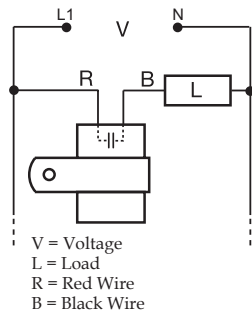


**FIGURE 3 - FS100 Series**

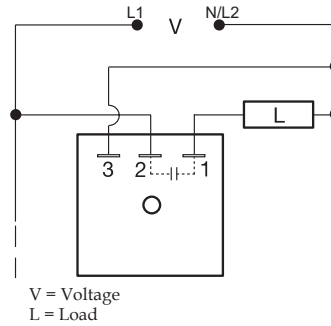


**FIGURE 4 - FS200 Series**

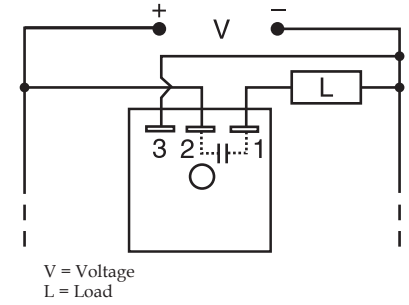


**FIGURE 5 - FS300 Series**

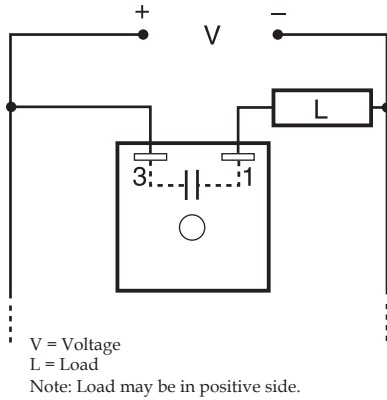


**FIGURE 6 - FS400 Series**

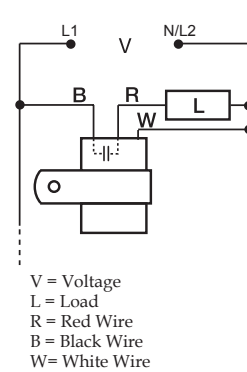


**FIGURE 7 - AF Series**

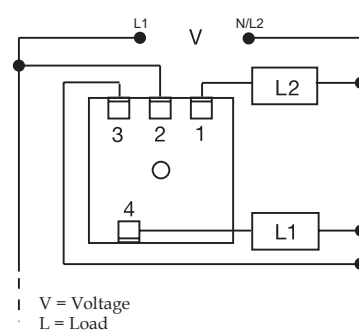


**FIGURE 8 - FS500 Series**

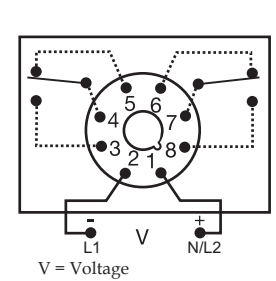


**FIGURE 11 - DLMU Series**

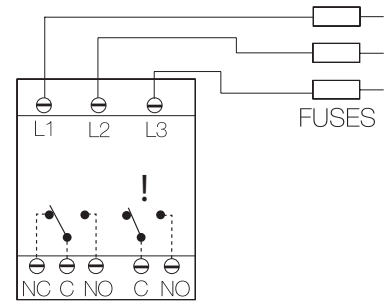


**FIGURE 9 - SC3/SC4 Series**

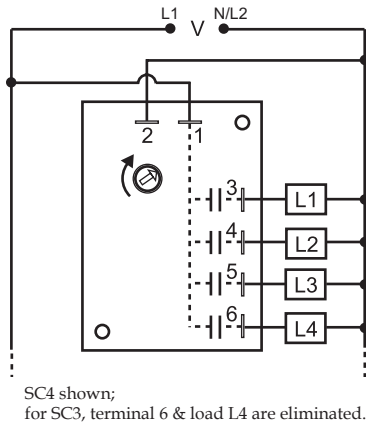


**FIGURE 10 - WVM Series**

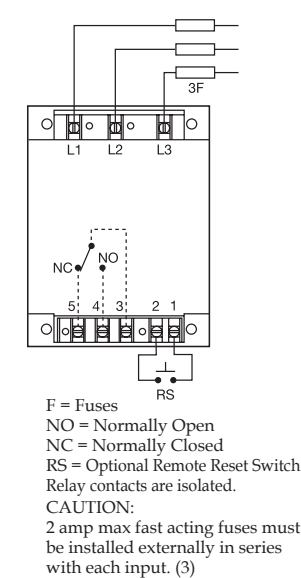

**FIGURE 12 - HLMU Series**

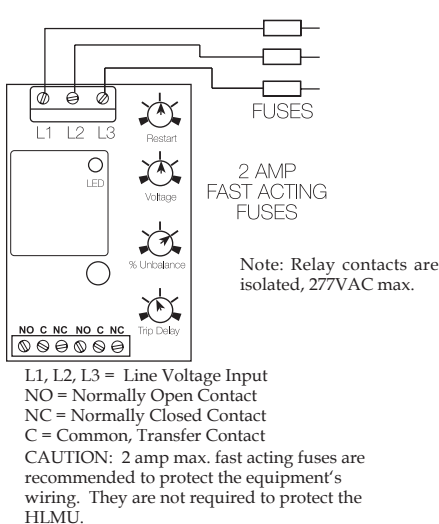

**FIGURE 13 - PLMU/PLM/PLR/PLS Series**

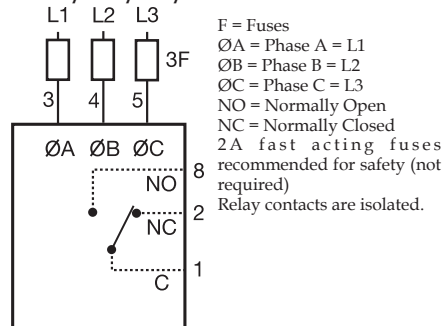

**FIGURE 14 - TVM/TVW Series**

