



Provides protection for motors and other sensitive loads. Continuously measures the voltage of each of the three phases using a microcomputer circuit design that senses under and overvoltage, voltage unbalance, phase loss, and phase reversal. Protection is provided even when regenerated voltages are present. Includes a trip delay to prevent nuisance tripping and a restart delay to prevent short cycling after a momentary power outage.

For more information see:  
Appendix B, page 167, Figure 30 for dimensional drawing.  
Appendix C, page 168, Figure 14 for connection diagram.

## Operation

Upon application of line voltage, the restart delay begins. The output relay is de-energized during restart delay. Under normal conditions, the output energizes after restart delay. Undervoltage, overvoltage, and voltage unbalance must be sensed for continuous trip delay period before the output is de-energized. The output will not de-energize if a fault is corrected during the trip delay. The restart delay begins as soon as the output relay de-energizes. If the restart delay is completed when the fault is corrected, the output relay will energize immediately. The output relay will not energize if a fault or phase reversal is sensed as 3-phase input voltage is applied.

Reset: Reset is automatic upon correction of a fault.

## LED Operation

The LED flashes green during the restart delay, then glows green when the output energizes. It flashes red during the trip delay then glows red when the output de-energizes. It flashes red/ green if phase reversal is sensed.

## Features:

- Protects against phase loss & reversal; over, under & unbalanced voltages; short cycling
- Fixed trip points & delays
- Fixed voltages from 208 to 480VAC
- Isolated, 10A, SPDT output contacts
- Bi-color LED indicator shows: output status, faults, time delays & phase reversal
- ASME A17.1 rule 210.6
- NEMA MG1 14:30, 14:35
- IEEE C62.41-1991 Level B

Approvals:   

## Auxiliary Products:

- **Female quick connect:**  
P/N: P1015-13 (AWG 10/12)  
P/N: P1015-64 (AWG 14/16)  
P/N: P1015-14 (AWG 18/22)
- **3-phase fuse block/disconnect:**  
P/N: FH3P
- **2 Amp fuse:** P/N: P0600-11
- **Voltage reduction module:**  
P/N: VRM6048

## Available Models:

TVM208A100.5S3S	TVM460A510S5S
TVM230A101S1S	TVM460A75S2M
TVM400A101S1S	TVM480A100.5S3S
TVM460A101S1S	TVM480A50.5S2S
TVM460A41S5M	

If desired part number is not listed, please call us to see if it is technically possible to build.

## Order Table:

**TVM**

**X**

### Line Voltage

—208A - 208VAC  
—220A - 220VAC  
—230A - 230VAC  
—240A - 240VAC  
—380A - 380VAC  
—400A - 400VAC  
—415A - 415VAC  
—440A - 440VAC  
—460A - 460VAC  
—480A - 480VAC

**X**

### Voltage Unbalance

—Fixed - Specify 4-10% in 1% increments

**X**

### Trip Delay\*

—Fixed - Specify from 0.2-1s in 0.1s increments  
—Fixed - Specify from 1-100s in 1s increments

**X**

### Restart Delay\*

—Fixed - Specify from 0.5-1s in 0.1s increments  
—Fixed - Specify from 1-100s in 1s increments  
—Fixed - Specify from 1-999min in 1min increments

\*Must indicate (S) for secs. or (M) for mins.


## Specifications

Line Voltage	Type	3-phase delta or wye with no connection to neutral	Output	Type	Isolated SPDT relay contacts
Input Voltage	208 to 480VAC		Rating	208 to 240VAC (55°C)	10A resistive @ 125VAC, 5A @ 250VAC, 1/4 hp @ 125VAC
AC Line Frequency	50 - 100 Hz		380 to 480VAC		10A resistive @ 240VAC, 1/4 hp @ 125VAC, 1/3 hp @ 250VAC, max. voltage 277VAC
Phase Sequence	ABC		Life		Mechanical - 1 x 10 <sup>6</sup> ; Electrical - 1 x 10 <sup>5</sup>
Power Consumption	Approx. 2W for 240V units Approx. 3W for 480V units		Protection		Surge..... IEEE C62.41-1991 Level B
Overvoltage, Undervoltage, & Voltage Unbalance			Dielectric Breakdown	208 to 240VAC	≥ 1500V RMS input to output terminals
Overvoltage & Undervoltage	Voltage detection with delay trip & automatic reset		380 to 480VAC		≥ 2500V RMS input to output terminals
Undervoltage Trip Point	88 - 92% of the selected line voltage		Mechanical		
Reset Voltage	≅ +3% of trip voltage		Mounting		Surface mount with one #8 (M5 x 0.8) screw
Overvoltage Trip Point	109 - 113% of the selected line voltage		Dimensions		2 x 2 x 1.25 in. (50.8 x 50.8 x 31.8 mm)
Reset Voltage	≅ -3% of trip voltage		Termination		0.25 in. (6.35 mm) male quick connect terminals
Trip Variation vs Temperature	≅ ±2%		Environmental		
Voltage Unbalance	Factory fixed from 4 - 10%		Operating / Storage Temperature		-40° to 55°C / -40° to 85°C
Reset On Balance	≅ -0.7% unbalance		Humidity		95% relative, non-condensing
Trip Delay Range	Fixed from 0.2 - 100s ±15% or ±0.1s, whichever is greater		Weight		≅ 2.8 oz (79 g)
Restart Delay Range	Fixed from 0.5s - 999m ±15% or ±0.2s, whichever is greater				
Phase Reversal & Phase Loss Response	≅ 200ms; automatic reset				
Phase Loss	≥ 25% unbalance				




# Appendix C - Connection Diagrams


**FIGURE 1 - FSU1000 Series**

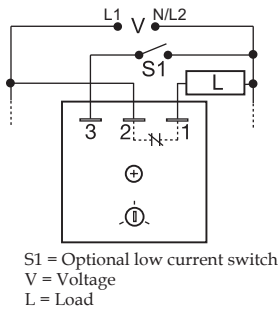


**FIGURE 2 - FS100 Series**

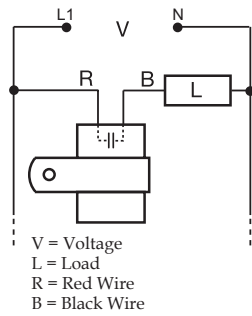


**FIGURE 3 - FS100 Series**

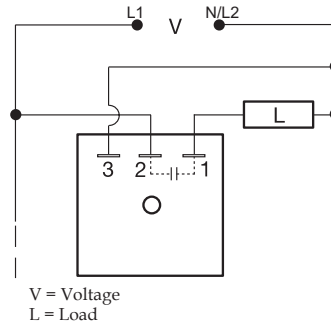


**FIGURE 4 - FS200 Series**

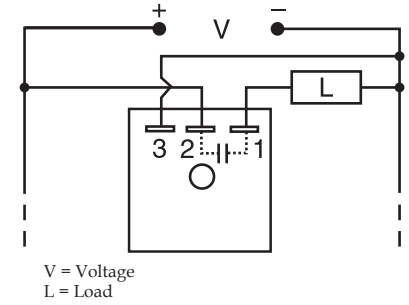


**FIGURE 5 - FS300 Series**

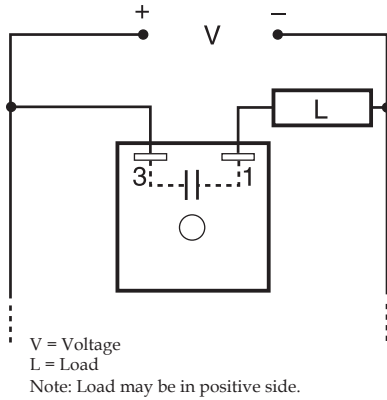


**FIGURE 6 - FS400 Series**

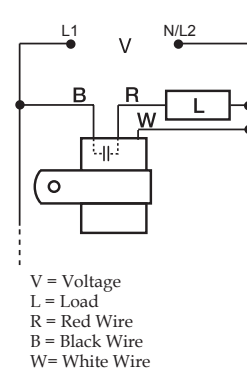


**FIGURE 7 - AF Series**

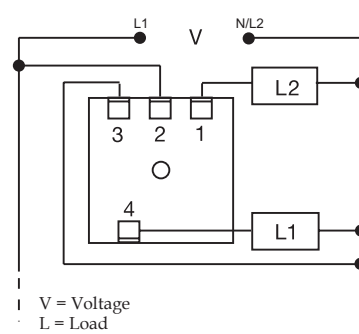


**FIGURE 8 - FS500 Series**




**FIGURE 9 - SC3/SC4 Series**

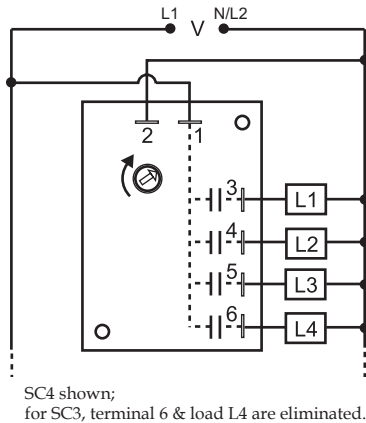


**FIGURE 10 - WVM Series**

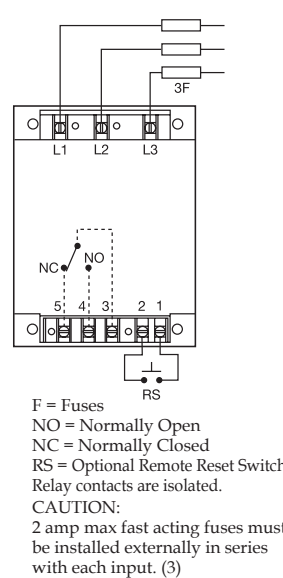


**FIGURE 11 - DLMU Series**

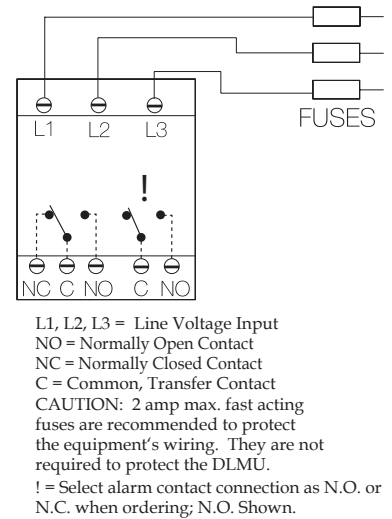

**FIGURE 12 - HLMU Series**

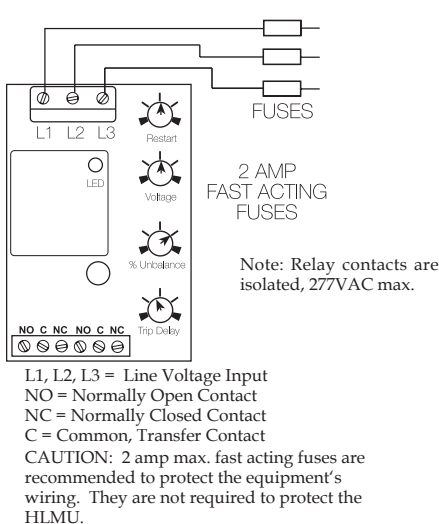

**FIGURE 13 - PLMU/PLM/PLR/PLS Series**

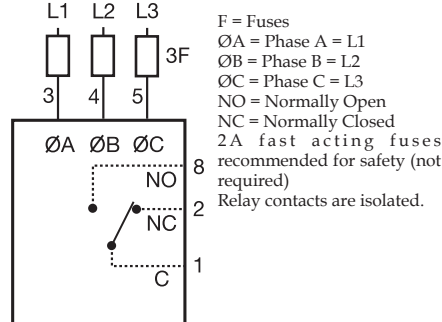

**FIGURE 14 - TVM/TVW Series**

