

## 32-bit Microcontroller

CMOS

# FR60 MB91460B Series

## MB91F467BA/466BA \*1, MB91F465BB/464BB \*1

### ■ DESCRIPTION

MB91460B series is a line of general-purpose 32-bit RISC microcontrollers designed for embedded control applications which require high-speed real-time processing, such as consumer devices and on-board vehicle systems. This series uses the FR60 CPU, which is compatible with the FR family\*2 of CPUs.

This series contains the LIN-USART and CAN controllers.

### ■ FEATURES

#### 1. FR60 CPU core

- 32-bit RISC, load/store architecture, five-stage pipeline
- 16-bit fixed-length instructions (basic instructions)
- Instruction execution speed: 1 instruction per cycle
- Instructions including memory-to-memory transfer, bit manipulation, and barrel shift instructions: Instructions suitable for embedded applications
- Function entry/exit instructions and register data multi-load store instructions : Instructions supporting C language
- Register interlock function: Facilitating assembly-language coding
- Built-in multiplier with instruction-level support  
    Signed 32-bit multiplication: 5 cycles  
    Signed 16-bit multiplication: 3 cycles
- Interrupts (save PC/PS) : 6 cycles (16 priority levels)
- Harvard architecture enabling program access and data access to be performed simultaneously
- Instructions compatible with the FR family

#### 2. Internal peripheral resources

- General-purpose ports : Maximum 108 ports
- DMAC (DMA Controller)  
    Maximum of 5 channels able to operate simultaneously

For the information for microcontroller supports, see the following web site.

This web site includes the "**Customer Design Review Supplement**" which provides the latest cautions on system development and the minimal requirements to be checked to prevent problems before the system development.

<http://edevice.fujitsu.com/micom/en-support/>

# MB91460B Series

- 2 transfer sources (internal peripheral/software)  
Activation source can be selected using software  
Addressing mode specifies full 32-bit addresses (increment/decrement/fixed)
- Transfer mode (demand transfer/burst transfer/step transfer/block transfer)  
Transfer data size selectable from 8/16/32-bit  
Multi-byte transfer enabled (by software)  
DMAC descriptor in I/O areas (200<sub>H</sub> to 240<sub>H</sub>, 1000<sub>H</sub> to 1024<sub>H</sub>)
- A/D converter (successive approximation type)  
10-bit resolution: maximum 32 channels  
Conversion time: minimum 1  $\mu$ s
- External interrupt inputs : maximum 16 channels  
6 channels shared with CAN RX or I<sup>2</sup>C pins
- Bit search module (for REALOS)  
Function to search the first bit position of "1", "0", "changed" from the MSB (most significant bit) within one word
- LIN-USART (full duplex double buffer): 4 or 7 channels, depending on pin multiplexing  
Clock synchronous/asynchronous selectable  
Sync-break detection  
Internal dedicated baud rate generator
- I<sup>2</sup>C bus interface (supports 400 kbps): 2 channels  
Master/slave transmission and reception  
Arbitration function, clock synchronization function
- CAN controller (C-CAN): 3 or 6 channels (depending on the device)  
Maximum transfer speed: 1 Mbps  
32 transmission/reception message buffers
- Sound generator : 1 channel  
Tone frequency : PWM frequency divide-by-two (reload value + 1)
- Alarm comparator : 1 channel  
Monitor external voltage  
Generate an interrupt in case of voltage lower/higher than the defined thresholds (reference voltage)
- 16-bit PPG timer : maximum 16 channels
- 16-bit reload timer: 8 channels
- 16-bit free-run timer: 8 channels (1 channel each for ICU and OCU)
- Input capture: maximum 8 channels (operates in conjunction with the free-run timer)
- Output compare: maximum 8 channels (operates in conjunction with the free-run timer)
- Up/Down counter: 2 channels (2\*8-bit or 1\*16-bit)
- Watchdog timer
- Real-time clock
- Low-power consumption modes : Sleep/stop mode function
- Low voltage detection circuit

Note: \*1 These devices are under development.

Note: \*2 FR, the abbreviation of FUJITSU RISC controller, is a line of products of Fujitsu Microelectronics Limited.  
*(Continued)*

(Continued)

- Clock supervisor  
Monitors the sub-clock (32 kHz) and the main clock (4 MHz), and switches to a recovery clock (CR oscillator, etc.) when the oscillations stop.
- Clock modulator
- Clock monitor
- Sub-clock calibration  
Corrects the real-time clock timer when operating with the 32 kHz or CR oscillator
- Main oscillator stabilization timer  
Generates an interrupt in sub-clock mode after the stabilization wait time has elapsed on the 23-bit stabilization wait time counter
- Sub-oscillator stabilization timer  
Generates an interrupt in main clock mode after the stabilization wait time has elapsed on the 15-bit stabilization wait time counter

### 3. Package and technology

- Package : QFP-144
- CMOS 180 nm technology
- Power supply range 3 V to 5 V (1.8 V internal logic provided by a step-down voltage converter)
- Operating temperature range: between – 40°C and + 125°C

# MB91460B Series

## ■ PRODUCT LINEUP

Feature	MB91V460	MB91F465BB/464BB	MB91F467BA/466BA
Max. core frequency (CLKB)	80 MHz	100 MHz	96 MHz
Max. resource frequency (CLKP)	40 MHz	50 MHz	48 MHz
Max. external bus frequency (CLKT)	40 MHz	50 MHz	48 MHz
Max. CAN frequency (CLKCAN)	20 MHz	50 MHz	48 MHz
Technology	0.35μm	0.18μm	0.18μm
Watchdog	yes	yes	yes
Watchdog (RC osc. based)	yes (disengageable)	yes	yes
Bit Search	yes	yes	yes
Reset input (INITX)	yes	yes	yes
Hardware standby input (HSTX)	yes	no	no
Clock Modulator	yes	yes	yes
Clock Monitor	yes	yes	yes
Low Power Mode	yes	yes	yes
DMA	5 ch	5 ch	5 ch
MMU/MPU	MPU (16 ch) <sup>†</sup>	MPU (8 ch) <sup>†</sup>	MPU (8 ch) <sup>†</sup>
Flash memory	Emulation SRAM 32bit read data	MB91F465BB: 544 KByte MB91F464BB: 416 KByte	MB91F467BA: 1088 KByte MB91F466BA: 832 KByte
Satellite Flash memory	-	-	-
Flash Protection	-	yes	yes
D-RAM	64 KByte	24 KByte	24 KByte
ID-RAM	64 KByte	16 KByte	16 KByte
Flash-Cache (Instruction cache)	16 KByte	8 KByte	8 KByte
Boot-ROM / BI-ROM	4 KByte fixed	4 KByte	4 KByte
RTC	1 ch	1 ch	1 ch
Free Running Timer	8 ch	8 ch <sup>‡</sup>	8 ch <sup>‡</sup>
ICU	8 ch	MD_3=0: 8 ch MD_3=1: 4 ch <sup>§</sup>	MD_3=0: 8 ch MD_3=1: 4 ch <sup>§</sup>
OCU	8 ch	MD_3=0: 8 ch MD_3=1: 4 ch <sup>¶</sup>	MD_3=0: 8 ch MD_3=1: 4 ch <sup>¶</sup>
Reload Timer	8 ch	8 ch <sup>¤</sup>	8 ch <sup>¤</sup>
PPG 16-bit	16 ch	MD_3=0: 16 ch MD_3=1: 8 ch <sup>¤</sup>	MD_3=0: 16 ch MD_3=1: 8 ch <sup>¤</sup>
PFM 16-bit	1 ch	-	-
Sound Generator	1 ch	1 ch	1 ch
Up/Down Counter (8/16 bit)	4 ch (8-bit) / 2 ch (16-bit)	MD_3=0: 2 ch (8-bit) / 1 ch (16bit) MD_3=1: NA <sup>  </sup>	MD_3=0: 2 ch (8-bit) / 1 ch (16bit) MD_3=1: NA <sup>  </sup>
C_CAN	6 ch (128msg)	3 ch (32msg)	6 ch (32msg)
LIN-USART	4 ch + 4 ch FIFO + 8 ch	MD_3=0: 3 ch + 4 ch FIFO <sup>  </sup> MD_3=1: 4 ch FIFO	MD_3=0: 3 ch + 4 ch FIFO <sup>  </sup> MD_3=1: 4 ch FIFO
I <sup>2</sup> C (400K)	4 ch	2 ch	2 ch

# MB91460B Series

FR external bus	yes (32bit addr, 32bit data)	MD_3=0: no MD_3=1: yes (22bit addr, 16bit data)	MD_3=0: no MD_3=1: yes (22bit addr, 16bit data)
External Interrupts	16 ch	MD_3=0: 16 ch MD_3=1: 12 ch <sup>9</sup>	MD_3=0: 16 ch MD_3=1: 12 ch <sup>9</sup>
NMI Interrupts	1 ch	1 ch	1 ch
SMC	6 ch	-	-
LCD controller (40x4)	1 ch	-	-
ADC (10-bit)	32 ch	MD_3=0: 32 ch MD_3=1: 16 ch	MD_3=0: 32 ch MD_3=1: 16 ch
Alarm Comparator	2 ch	1 ch	1 ch
Supply Supervisor (low voltage detection)	yes	yes	yes
Clock Supervisor	yes	yes	yes
Main clock oscillator	4 MHz	4 MHz	4 MHz
Sub clock oscillator	32kHz	32kHz	32kHz
RC oscillator	100kHz	100kHz / 2MHz	100kHz / 2MHz
PLL	x 20	x 25	x 25
DSU4	yes	no	no
EDSU	yes (32 BP) <sup>1</sup>	yes (16 BP) <sup>1</sup>	yes (16 BP) <sup>1</sup>
Supply voltage	3V/5V	3V/5V	3V/5V
Regulator	yes	yes	yes
Power consumption	n.a.	< 1.3 W	< 1.3 W
Temperature Range (Ta)	0..70 C	-40..125 C	-40..125 C
Package	BGA-660	QFP-144	QFP-144
Power on to PLL run	< 20 ms	< 20 ms	< 20 ms
Flash Download Time	n.a.	< 5 sec. typical	< 6 sec. typical

\*1: MPU channels use EDSU breakpoint registers (shared operation between MPU and EDSU).

\*2: Free Running Timer: MD3=0 : CH 1 and 0 cannot select external clock (bit7 of TCCS1,0)

MD3=1: CH 3, 2, 1, and 0 cannot select external clock (bit7 of TCCS3,2,1,0)

\*3: ICU: MD3=1: Do not set PFR = 1 & EPFR = 1 (for LIN Synch Field detect).

\*4: OCU: MD3=1: You cannot use external out-port (but, OCU-function is active.)

\*5: Reload Timer: MD3=1: CH 7, 6, 5, and 4 cannot select external event

\*6: PPG: MD3=1: You can use CH15 to 8 of PPG. CH15 to12 cannot select external trigger.

\*7: Up/Down Counter: MD3=1: You can use Timer-mode only.

\*8: LIN-USART CH 0 (shared with external bus) can be used for asynchronous mode only.

\*9: External Interrupts: INT7 to INT4(shared with external bus) can be used for MD3=0 mode only.

INT0 (shared with external bus) can be used for MD3=0 mode only.

# MB91460B Series

## ■ PIN ASSIGNMENT

### 1. MB91F467BA/466BA with MD\_3=1

(TOP VIEW)


P10_0/SYSCLK	VSS5	37	VSS5	1
P09_0/CSX0	38	39	108	VDD5
P09_1/CSX1	39	40	109	VDD5
P08_0/WRX0	40	41	107	AVCC5
P08_4/RDX	41	42	107	AVRHS
P08_7/RDV	42	43	106	AVSS5
WRX1	43	44	104	ALARM 0
P24_1/INT1	44	45	103	P18_6/SQ07 OK7
P23_0/RX0/INT8	45	46	102	P18_5/SQ07
P23_1/TX0	46	47	101	P18_4/SIN7
P23_2/RX1/INT9	47	48	100	P18_2/SQ06 OK6
P23_3/TX1	48	49	99	P18_1/SQ06
P23_4/RX2/INT10	49	50	98	P18_0/SIN6
P23_5/TX2	50	51	97	P19_6/SQ05 OK5
P23_6/RX3/INT11	51	52	96	P19_5/SQ05
P23_7/TX3	52	53	95	P19_4/SIN5
VDD5	53	54	94	P19_2/SQ04 OK4
VSS5	54	55	93	P19_1/SQ04
P22_0/RX4/INT12	55	56	92	P19_0/SIN4
P22_1/TX4	56	57	91	VSS5
P22_2/RX5/INT13	57	58	90	VDD5
P22_3/TX5	58	59	89	VDD5R
P22_4/SDA0/INT14	59	60	88	VCC18C
P22_5/SCL0	60	61	87	VSS5
P22_6/SDA1/INT15	61	62	86	NMIX
P22_7/SCL1	62	63	85	INITX
P16_0/PPG8	63	64	84	XIA
P16_1/PPG9	64	65	83	XIA
P16_2/PPG10	65	66	82	XOA
P16_3/PPG11	66	67	81	VSS5
P16_4/PPG12/SGA	67	68	80	XO
P16_5/PPG13/SG0	68	69	79	X1
P16_6/PPG14	69	70	78	MD_3
P16_7/PPG15/ATGX	70	71	77	MONLK
VDD5	71	72	76	MD_2
			75	MD_1
			74	MD_0
			73	VSS5

LQFP-144

# MB91460B Series

## 2. MB91F467BA/466BA with MD\_3=0


(TOP VIEW)

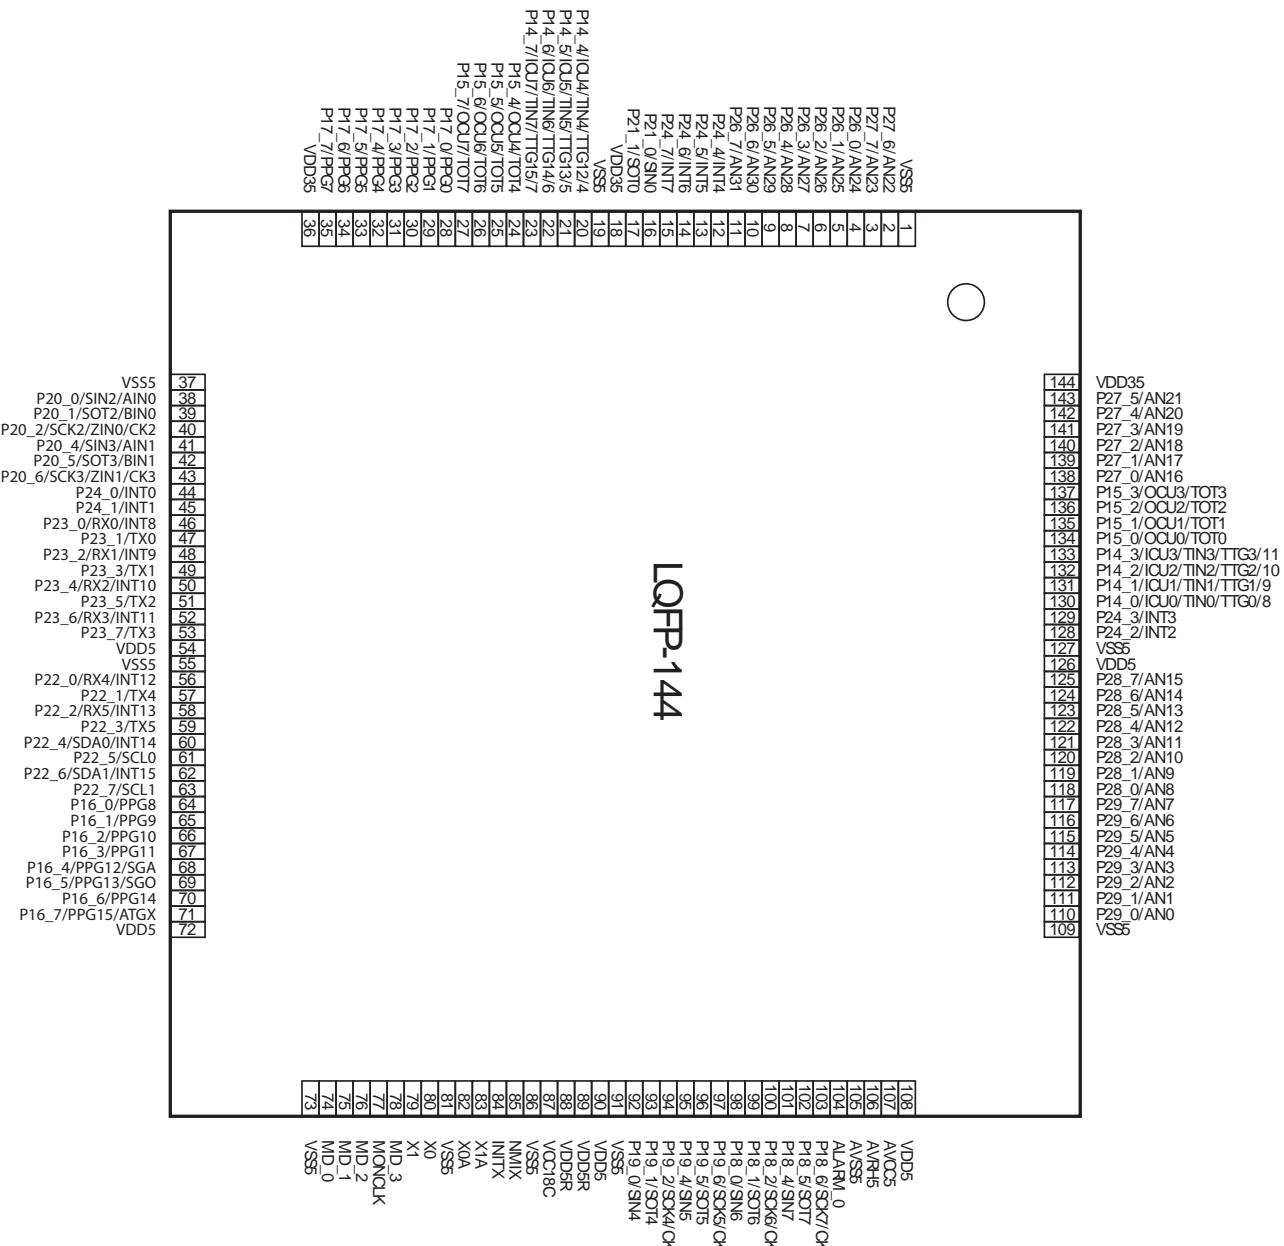

# MB91460B Series

## 3. MB91F465BB/464BB with MD\_3=1

(TOP VIEW)

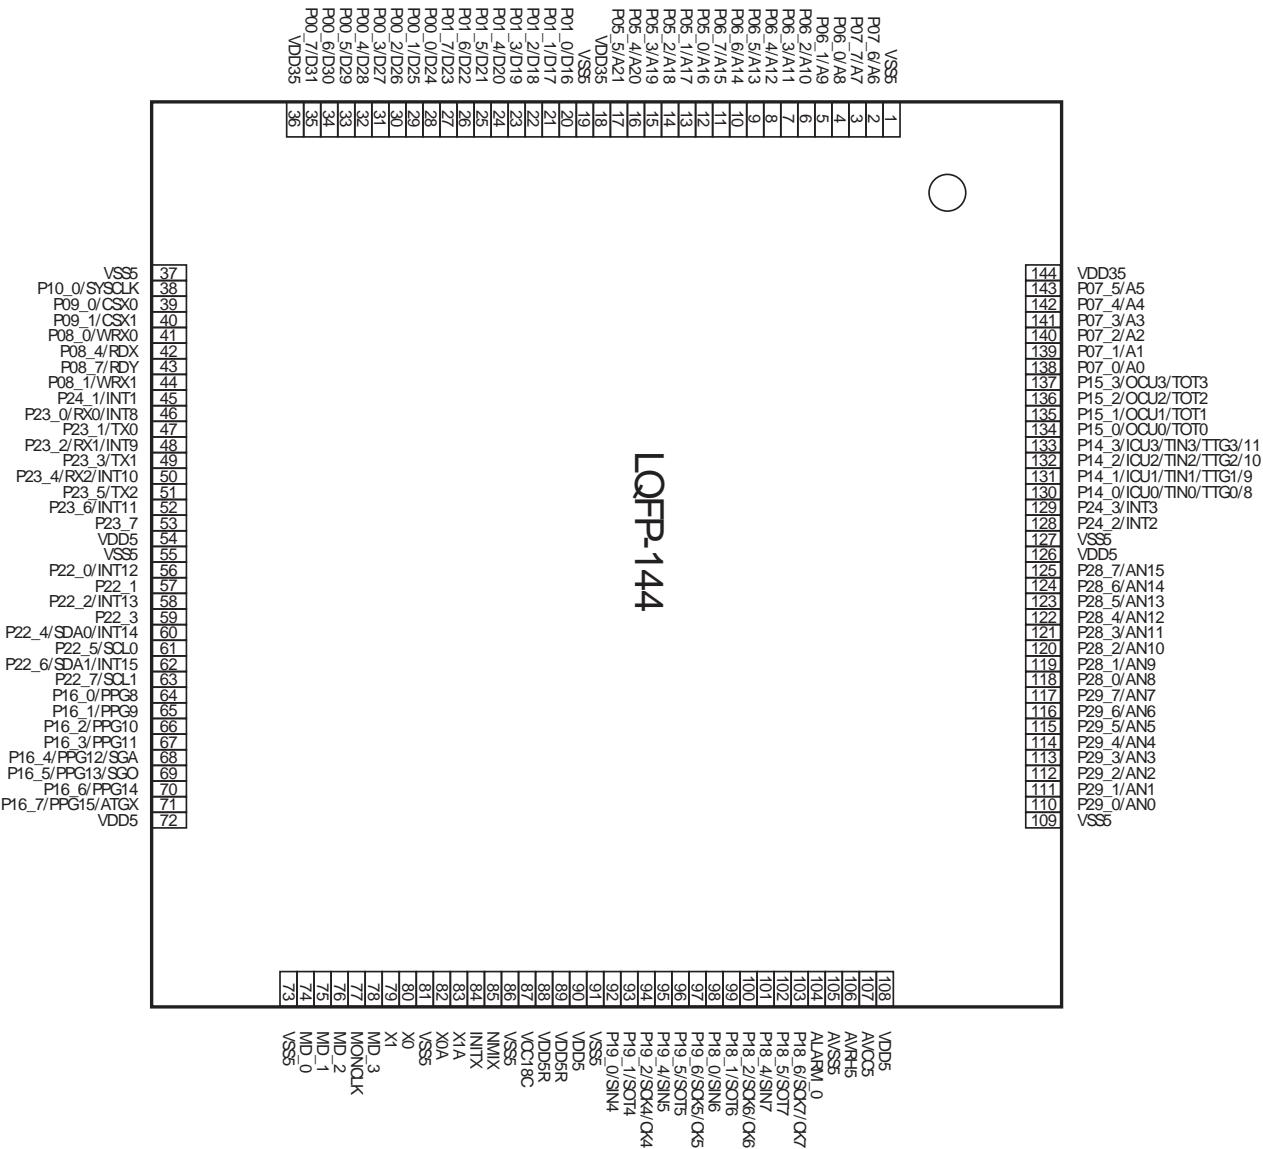


LQFP-144

# MB91460B Series

## 4. MB91F465BB/464BB with MD\_3=0

(TOP VIEW)

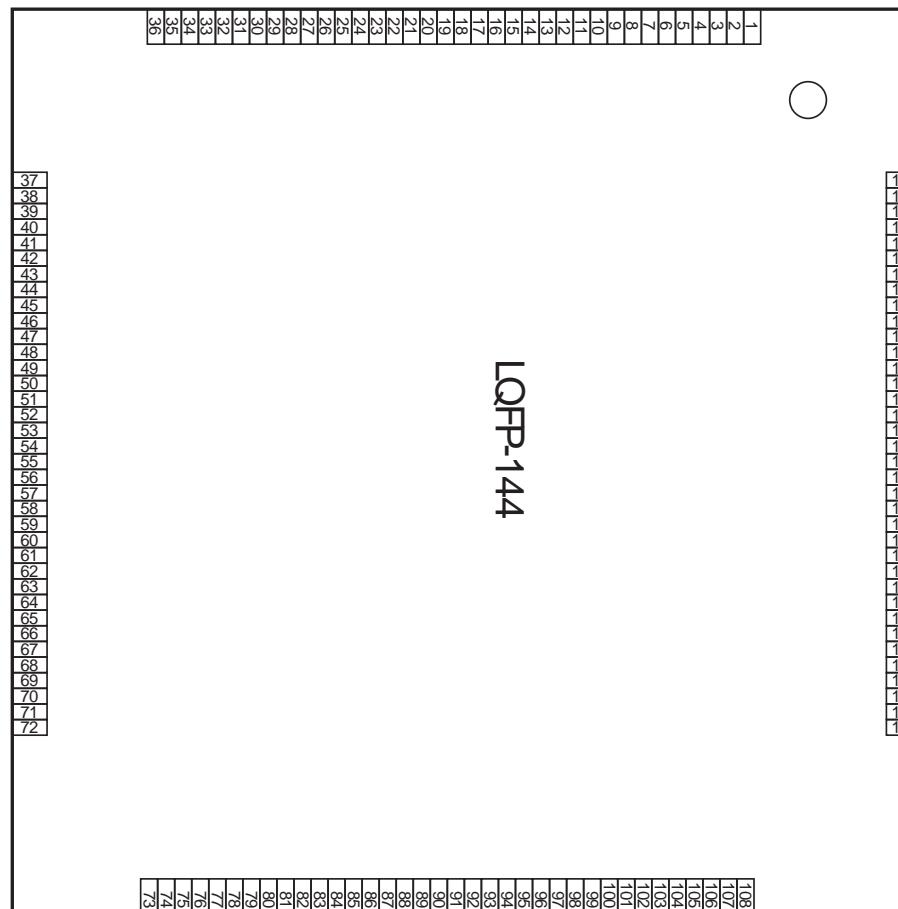

LQFP-144

P20_0/SIN2/AIN0	38
P20_1/SOT2/BIN0	39
P20_2/SCK2/ZIN0/CK2	40
P20_3/SIN3/AIN1	41
P20_5/SOT3/BIN1	42
P20_6/SCK3/ZIN1/CK3	43
P24_0/INT0	44
P24_1/INT1	45
P23_0/RX0/INT8	46
P23_1/TX0	47
P23_2/RX1/INT9	48
P23_3/TX1	49
P23_4/RX2/INT10	50
P23_5/TX2	51
P23_6/INT11	52
P23_7	53
VDD5	54
VSS5	55
P22_0/INT12	56
P22_1	57
P22_2/INT13	58
P22_3	59
P22_4/SDA0/INT14	60
P22_5/SC0	61
P22_6/SDA1/INT15	62
P22_7/SC1	63
P16_0/PPG8	64
P16_1/PPG9	65
P16_2/PPG10	66
P16_3/PPG11	67
P16_4/PPG12/SCA	68
P16_5/PPG13/SG0	69
P16_6/PPG14	70
P16_7/PPG15/ATGX	71
VDD5	72

# MB91460B Series

## ■ PIN DESCRIPTION

### 1. MB91F467BA/466BA AND MB91F465BB/464BB with MD\_3=1

Pin no.	Pin name	I/O	I/O circuit type*	Function
2, 3	P07_6, P07_7	I/O	B	General-purpose input/output port
	A6, A7			Signal pins of external address bus (bit6 to bit7)
4 to 11	P06_0 to P06_7	I/O	B	General-purpose input/output port
	A8 to A15			Signal pins of external address bus (bit8 to bit15)
12 to 17	P05_0 to P05_5	I/O	A	General-purpose input/output port
	A16 to A21			Signal pins of external address bus (bit16 to bit21)
20 to 27	P01_0 to P01_7	I/O	A	General-purpose input/output port
	D16 to D23			Signal pins of external data bus (bit16 to bit23)
28 to 35	P00_0 to P00_7	I/O	A	General-purpose input/output port
	D24 to D31			Signal pins of external data bus (bit24 to bit31)
38	P10_0	I/O	A	General-purpose input/output port
	SYSCLK			External bus clock output pin
39	P09_0	I/O	A	General-purpose input/output port
	CSX0			Chip select output pins
40	P09_1	I/O	A	General-purpose input/output port
	CSX1			Chip select output pins
41	P08_0	I/O	A	General-purpose input/output port
	WRX0			External write strobe output pins
42	P08_4	I/O	A	General-purpose input/output port
	RDX			External read strobe output pin
43	P08_7	I/O	A	General-purpose input/output port
	RDY			External ready input pin
44	P08_1 Not on MB91F467BA/ MB91F466BA	I/O	A	General-purpose input/output port
	WRX1			External write strobe output pins
	INT0 Not on MB91F467BA/ MB91F466BA			External interrupt input, can only be used in general-purpose IO port mode
45	P24_1	I/O	A	General-purpose input/output port
	INT1			External interrupt input pins
46	P23_0	I/O	A	General-purpose input/output port
	RX0			RX input pin of CAN0
	INT8			External interrupt input pins

# MB91460B Series

Pin no.	Pin name	I/O	I/O circuit type*	Function
47	P23_1	I/O	A	General-purpose input/output port
	TX0			TX output pin of CAN0
48	P23_2	I/O	A	General-purpose input/output port
	RX1			RX input pin of CAN1
	INT9			External interrupt input pins
49	P23_3	I/O	A	General-purpose input/output port
	TX1			TX output pin of CAN1
50	P23_4	I/O	A	General-purpose input/output port
	RX2			RX input pin of CAN2
	INT10			External interrupt input pin
51	P23_5	I/O	A	General-purpose input/output port
	TX2			TX output pin of CAN2
52	P23_6	I/O	A	General-purpose input/output port
	INT11			External interrupt input pin
	MB91F467BA/ MB91F466BA: RX3			RX input pin of CAN3
53	P23_7	I/O	A	General-purpose input/output port
	MB91F467BA/ MB91F466BA: TX3			TX output pin of CAN3
56	P22_0	I/O	A	General-purpose input/output port
	INT12			External interrupt input pin
	MB91F467BA/ MB91F466BA: RX4			RX input pin of CAN4
57	P22_1	I/O	A	General-purpose input/output port
	MB91F467BA/ MB91F466BA: TX4			TX output pin of CAN4
58	P22_2	I/O	A	General-purpose input/output port
	INT13			External interrupt input pin
	MB91F467BA/ MB91F466BA: RX5			RX input pin of CAN5
59	P22_3	I/O	A	General-purpose input/output port
	MB91F467BA/ MB91F466BA: TX5			TX output pin of CAN5
60	P22_4	I/O	C	General-purpose input/output port
	SDA0			I <sup>2</sup> C bus DATA input/output pin (open drain)
	INT14			External interrupt input pin
61	P22_5	I/O	C	General-purpose input/output port
	SCL0			I <sup>2</sup> C bus clock input/output pin (open drain)

# MB91460B Series

Pin no.	Pin name	I/O	I/O circuit type*	Function
62	P22_6	I/O	C	General-purpose input/output port
	SDA1			I <sup>2</sup> C bus DATA input/output pin (open drain)
	INT15			External interrupt input pin
63	P22_7	I/O	C	General-purpose input/output port
	SCL1			I <sup>2</sup> C bus clock input/output pin (open drain)
64	P16_0	I/O	A	General-purpose input/output port
	PPG8			Output pins of PPG timer
65	P16_1	I/O	A	General-purpose input/output port
	PPG9			Output pins of PPG timer
66	P16_2	I/O	A	General-purpose input/output port
	PPG10			Output pins of PPG timer
67	P16_3	I/O	A	General-purpose input/output port
	PPG11			Output pins of PPG timer
68	P16_4	I/O	A	General-purpose input/output port
	PPG12			Output pins of PPG timer
	SGA			SGA output pin of sound generator
69	P16_5	I/O	A	General-purpose input/output port
	PPG13			Output pins of PPG timer
	SGO			SGO output pin of sound generator
70	P16_6	I/O	A	General-purpose input/output port
	PPG14			Output pins of PPG timer
71	P16_7	I/O	A	General-purpose input/output port
	PPG15			Output pins of PPG timer
	ATGX			A/D converter external trigger input pin
74 to 76	MD_0 to MD_2	I	G	Mode setting pins
77	MONCLK	O	M	Clock monitor pin
78	MD_3	I	H	Mode setting pin
79	X1	—	J1	Clock (oscillation) output
80	X0	—	J1	Clock (oscillation) input
82	X0A	—	J2	Sub clock (oscillation) input
83	X1A	—	J2	Sub clock (oscillation) output
84	INITX	I	H	External reset input pin
85	NMIX	I	H	Non-maskable interrupt input pin
92	P19_0	I/O	A	General-purpose input/output port
	SIN4			Data input pin of USART4

# MB91460B Series

Pin no.	Pin name	I/O	I/O circuit type*	Function
93	P19_1	I/O	A	General-purpose input/output port
	SOT4			Data output pin of USART4
94	P19_2	I/O	A	General-purpose input/output port
	SCK4			Clock input/output pin of USART4
	CK4			External clock input pin of free-run timer 4
95	P19_4	I/O	A	General-purpose input/output port
	SIN5			Data input pin of USART5
96	P19_5	I/O	A	General-purpose input/output port
	SOT5			Data output pin of USART5
97	P19_6	I/O	A	General-purpose input/output port
	SCK5			Clock input/output pin of USART5
	CK5			External clock input pin of free-run timer 5
98	P18_0	I/O	A	General-purpose input/output port
	SIN6			Data input pin of USART6
99	P18_1	I/O	A	General-purpose input/output port
	SOT6			Data output pin of USART6
100	P18_2	I/O	A	General-purpose input/output port
	SCK6			Clock input/output pin of USART6
	CK6			External clock input pin of free-run timer 6
101	P18_4	I/O	A	General-purpose input/output port
	SIN7			Data input pin of USART7
102	P18_5	I/O	A	General-purpose input/output port
	SOT7			Data output pin of USART7
103	P18_6	I/O	A	General-purpose input/output port
	SCK7			Clock input/output pin of USART7
	CK7			External clock input pin of free-run timer 7
104	ALARM_0	O	N	Alarm comparator input pin
110 to 117	P29_0 to P29_7	I/O	B	General-purpose input/output port
	AN0 to AN7			Analog input pins of A/D converter
118 to 125	P28_0 to P28_7	I/O	B	General-purpose input/output port
	AN8 to AN15			Analog input pins of A/D converter
128	P24_2	I/O	A	General-purpose input/output port
	INT2			External interrupt input pin
129	P24_3	I/O	A	General-purpose input/output port
	INT3			External interrupt input pin

# MB91460B Series

Pin no.	Pin name	I/O	I/O circuit type*	Function
130 to 133	P14_0 to P14_3	I/O	A	General-purpose input/output port
	ICU0 to ICU3			Input capture input pins
	TIN0 to TIN3			External trigger input pins of reload timer
	TTG0/8 to TTG3/11			External trigger input pins of PPG timer
134 to 137	P15_0 to P15_3	I/O	A	General-purpose input/output port
	OCU0 to OCU3			Output compare output pins
	TOT0 to TOT3			Reload timer output pins
138 to 143	P07_0 to P07_5	I/O	B	General-purpose input/output port
	A0 to A5			Signal pins of external address bus (bit0 to bit5)

**[Power supply/Ground pins]**

Pin no.	Pin name	I/O	Function
1, 19, 37, 55, 73, 81, 86, 91, 109, 127	VSS5	Supply	Ground pins
54, 72, 90, 108, 126	VDD5		Power supply pins
88, 89	VDD5R		Power supply pins for internal regulator
105	AVSS5		Analog ground pin for A/D converter
107	AVCC5		Power supply pin for A/D converter
106	AVRH5		Reference power supply pin for A/D converter
87	VCC18C		Capacitor connection pin for internal regulator
18, 36, 144	VDD35		Power supply pins for external bus part of I/O ring

# MB91460B Series

## 2. MB91F467BA/466BA AND MB91F465BB/464BB with MD\_3=0

Pin no.	Pin name	I/O	I/O circuit type*	Function
2 to 3	P27_6 to P27_7	I/O	B	General-purpose input/output ports
	AN22 to AN23			Analog input pins of A/D converter
4 to 11	P26_0 to P26_7	I/O	B	General-purpose input/output ports
	AN24 to AN31			Analog input pins of A/D converter
12 to 15	P24_4 to P24_7	I/O	A	General-purpose input/output ports
	INT4 to INT7			External interrupt input pins
16	P21_0	I/O	A	General-purpose input/output ports
	SIN0			Data input pin of USART0
17	P21_1	I/O	A	General-purpose input/output ports
	SOT0			Data output pin of USART0
20 to 23	P14_4 to P14_7	I/O	A	General-purpose input/output ports
	ICU4 to ICU7			Input capture input pins
	TIN4 to TIN7			External trigger input pins of reload timer
	TTG4/12 to TTG7/15			External trigger input pins of PPG timer
24 to 27	P15_4 to P15_7	I/O	A	General-purpose input/output ports
	OCU4 to OCU7			Output compare output pins
	TOT4 to TOT7			Reload timer output pins
28 to 35	P17_0 to P17_7	I/O	A	General-purpose input/output ports
	PPG0 to PPG7			Output pins of PPG timer
38	P20_0	I/O	A	General-purpose input/output ports
	SIN2			Data input pin of USART2
	AIN0			Up/down counter input pin
39	P20_1	I/O	A	General-purpose input/output ports
	SOT2			Data output pin of USART2
	BIN0			Up/down counter input pin
40	P20_2	I/O	A	General-purpose input/output ports
	SCK2			Clock input/output pin of USART2
	ZIN0			Up/down counter input pin
	CK2			External clock input pin of free-run timer 2
41	P20_4	I/O	A	General-purpose input/output ports
	SIN3			Data input pin of USART3
	AIN1			Up/down counter input pin
42	P20_5	I/O	A	General-purpose input/output ports
	SOT3			Data output pin of USART3
	BIN1			Up/down counter input pin

# MB91460B Series

Pin no.	Pin name	I/O	I/O circuit type*	Function
43	P20_6	I/O	A	General-purpose input/output ports
	SCK3			Clock input/output pin of USART3
	ZIN1			Up/down counter input pin
	CK3			External clock input pin of free-run timer 3
44	P24_0	I/O	A	General-purpose input/output ports
	INT0			External interrupt input pin
45	P24_1	I/O	A	General-purpose input/output ports
	INT1			External interrupt input pin
46	P23_0	I/O	A	General-purpose input/output ports
	RX0			RX input pin of CAN0
	INT8			External interrupt input pin
47	P23_1	I/O	A	General-purpose input/output ports
	TX0			TX output pin of CAN0
48	P23_2	I/O	A	General-purpose input/output ports
	RX1			RX input pin of CAN1
	INT9			External interrupt input pin
49	P23_3	I/O	A	General-purpose input/output ports
	TX1			TX output pin of CAN1
50	P23_4	I/O	A	General-purpose input/output ports
	RX2			RX input pin of CAN2
	INT10			External interrupt input pin
51	P23_5	I/O	A	General-purpose input/output ports
	TX2			TX output pin of CAN2
52	P23_6	I/O	A	General-purpose input/output ports
	MB91F467BA/ MB91F466BA: RX3			RX input pin of CAN3
	INT11			External interrupt input pin
53	P23_7 MB91F467BA/ MB91F466BA: TX3	I/O	A	General-purpose input/output ports
				TX output pin of CAN3
56	P22_0	I/O	A	General-purpose input/output port
	MB91F467BA/ MB91F466BA: RX4			RX input pin of CAN4
	INT12			External interrupt input pin
57	P22_1	I/O	A	General-purpose input/output port
	MB91F467BA/ MB91F466BA: TX4			TX output pin of CAN4

# MB91460B Series

Pin no.	Pin name	I/O	I/O circuit type*	Function
58	P22_2	I/O	A	General-purpose input/output port
	INT13			External interrupt input pin
	MB91F467BA/ MB91F466BA: RX5			RX input pin of CAN5
59	P22_3	I/O	A	General-purpose input/output port
	MB91F467BA/ MB91F466BA: TX5			TX output pin of CAN5
60	P22_4	I/O	C	General-purpose input/output ports
	SDA0			I <sup>2</sup> C bus DATA input/output pin (open drain)
	INT14			External interrupt input pin
61	P22_5	I/O	C	General-purpose input/output ports
	SCL0			I <sup>2</sup> C bus clock input/output pin (open drain)
62	P22_6	I/O	C	General-purpose input/output ports
	SDA1			I <sup>2</sup> C bus DATA input/output pin (open drain)
	INT15			External interrupt input pin
63	P22_7	I/O	C	General-purpose input/output ports
	SCL1			I <sup>2</sup> C bus clock input/output pin (open drain)
64 to 67	P16_0 to P16_3	I/O	A	General-purpose input/output ports
	PPG8 to PPG11			Output pins of PPG timer
68	P16_4	I/O	A	General-purpose input/output ports
	PPG12			Output pins of PPG timer
	SGA			SGA output pin of sound generator
69	P16_5	I/O	A	General-purpose input/output ports
	PPG13			Output pins of PPG timer
	SGO			SGO output pin of sound generator
70	P16_6	I/O	A	General-purpose input/output ports
	PPG14			Output pins of PPG timer
71	P16_7	I/O	A	General-purpose input/output ports
	PPG15			Output pins of PPG timer
	ATGX			A/D converter external trigger input pin
74 to 76	MD_0 to MD_2	I	G	Mode setting pins
77	MONCLK	O	M	Clock monitor pin
78	MD_3	I	H	Mode setting pins
79	X1	—	J1	Clock (oscillation) output
80	X0	—	J1	Clock (oscillation) input
82	X0A	—	J2	Sub clock (oscillation) input
83	X1A	—	J2	Sub clock (oscillation) output

# MB91460B Series

Pin no.	Pin name	I/O	I/O circuit type*	Function
84	INITX	I	H	External reset input pin
85	NMIX	I	H	Non-maskable interrupt input pin
92	P19_0	I/O	A	General-purpose input/output ports
	SIN4			Data input pin of USART4
93	P19_1	I/O	A	General-purpose input/output ports
	SOT4			Data output pin of USART4
94	P19_2	I/O	A	General-purpose input/output ports
	SCK4			Clock input/output pin of USART4
	CK4			External clock input pin of free-run timer 4
95	P19_4	I/O	A	General-purpose input/output ports
	SIN5			Data input pin of USART5
96	P19_5	I/O	A	General-purpose input/output ports
	SOT5			Data output pin of USART5
97	P19_6	I/O	A	General-purpose input/output ports
	SCK5			Clock input/output pin of USART5
	CK5			External clock input pin of free-run timer 5
98	P18_0	I/O	A	General-purpose input/output ports
	SIN6			Data input pin of USART6
99	P18_1	I/O	A	General-purpose input/output ports
	SOT6			Data output pin of USART6
100	P18_2	I/O	A	General-purpose input/output ports
	SCK6			Clock input/output pin of USART6
	CK6			External clock input pin of free-run timer 6
101	P18_4	I/O	A	General-purpose input/output ports
	SIN7			Data input pin of USART7
102	P18_5	I/O	A	General-purpose input/output ports
	SOT7			Data output pin of USART7
103	P18_6	I/O	A	General-purpose input/output ports
	SCK7			Clock input/output pin of USART7
	CK7			External clock input pin of free-run timer 7
104	ALARM_0	I	N	Alarm comparator input pin
110 to 117	P29_0 to P29_7	I/O	B	General-purpose input/output ports
	AN0 to AN7			Analog input pins of A/D converter
118 to 125	P28_0 to P28_7	I/O	B	General-purpose input/output ports
	AN8 to AN15			Analog input pins of A/D converter

# MB91460B Series

Pin no.	Pin name	I/O	I/O circuit type*	Function
128	P24_2	I/O	A	General-purpose input/output ports
	INT2			External interrupt input pin
129	P24_3	I/O	A	General-purpose input/output ports
	INT3			External interrupt input pin
130 to 133	P14_0 to P14_3	I/O	A	General-purpose input/output ports
	ICU0 to ICU3			Input capture input pins
	TIN0 to TIN3			External trigger input pins of reload timer
	TTG0/8 to TTG3/11			External trigger input pins of PPG timer
134 to 137	P15_0 to P15_3	I/O	A	General-purpose input/output ports
	OCU0 to OCU3			Output compare output pins
	TOT0 to TOT3			Reload timer output pins
138 to 143	P27_0 to P27_5	I/O	B	General-purpose input/output ports
	AN16 to AN21			Analog input pins of A/D converter

\* : For information about the I/O circuit type, refer to “■ I/O CIRCUIT TYPES”.



**[Power supply/Ground pins]**



Pin no.	Pin name	I/O	Function
1, 19, 37, 55, 73, 81, 86, 91, 109, 127	VSS5	Supply	Ground pins
54, 72, 90, 108, 126	VDD5		Power supply pins
88, 89	VDD5R		Power supply pins for internal regulator
105	AVSS5		Analog ground pin for A/D converter
107	AVCC5		Power supply pin for A/D converter
106	AVRH5		Reference power supply pin for A/D converter
87	VCC18C		Capacitor connection pin for internal regulator
18, 36, 144	VDD35		Power supply pins for external bus part of I/O ring

\* : For information about the I/O circuit type, refer to “■ I/O CIRCUIT TYPES”.



# MB91460B Series





## ■ I/O CIRCUIT TYPES

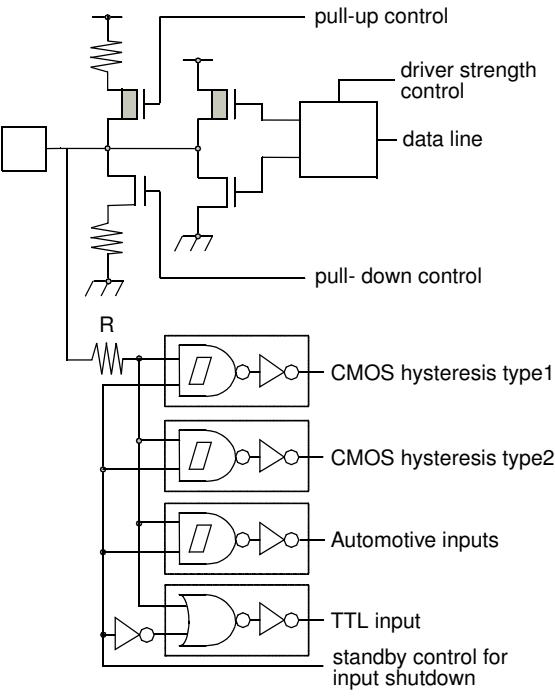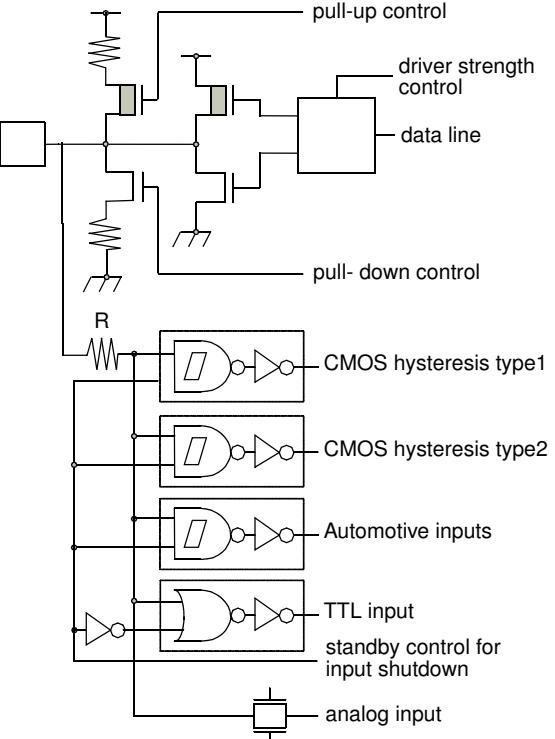Type	Circuit	Remarks
A	 <p>pull-up control driver strength control data line pull- down control  R CMOS hysteresis type1 CMOS hysteresis type2 Automotive inputs TTL input standby control for input shutdown</p>	<p>CMOS level output (programmable <math>I_{OL} = 5\text{mA}</math>, <math>I_{OH} = -5\text{mA}</math> and <math>I_{OL} = 2\text{mA}</math>, <math>I_{OH} = -2\text{mA}</math>) 2 different CMOS hysteresis inputs with input shutdown function Automotive input with input shutdown function TTL input with input shutdown function Programmable pull-up resistor: <math>50\text{k}\Omega</math> approx.</p>
B	 <p>pull-up control driver strength control data line pull- down control  R CMOS hysteresis type1 CMOS hysteresis type2 Automotive inputs TTL input standby control for input shutdown  analog input</p>	<p>CMOS level output (programmable <math>I_{OL} = 5\text{mA}</math>, <math>I_{OH} = -5\text{mA}</math> and <math>I_{OL} = 2\text{mA}</math>, <math>I_{OH} = -2\text{mA}</math>) 2 different CMOS hysteresis inputs with input shutdown function Automotive input with input shutdown function TTL input with input shutdown function Programmable pull-up resistor: <math>50\text{k}\Omega</math> approx. Analog input</p>

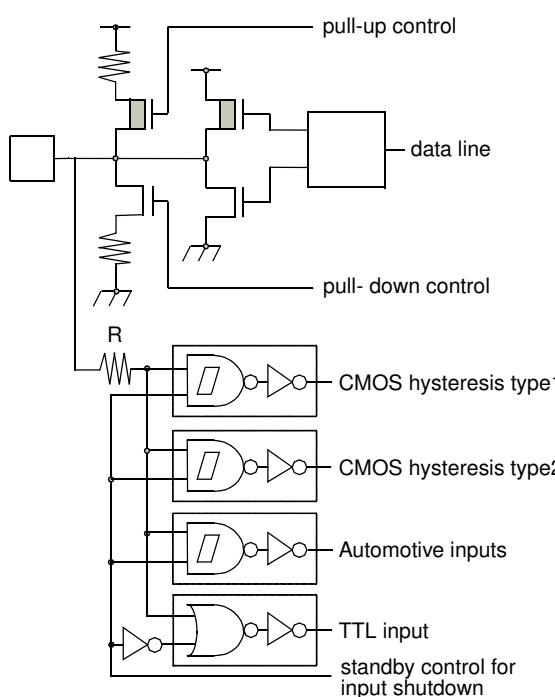
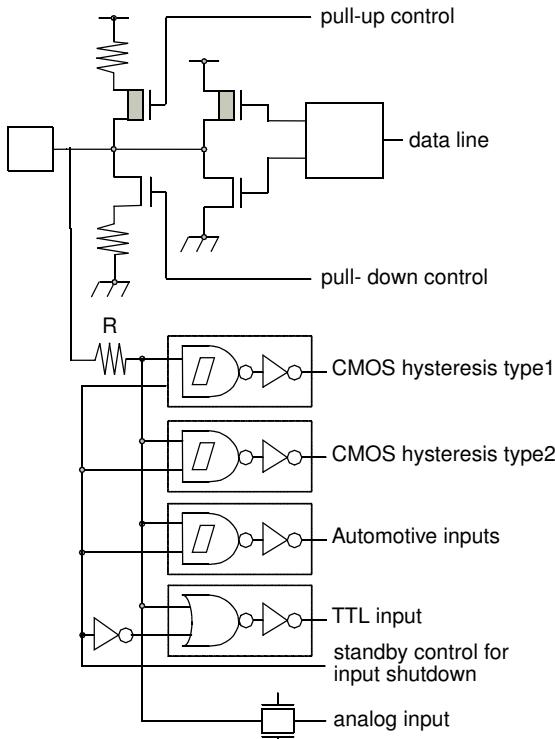
Type	Circuit	Remarks
C	 <p>pull-up control data line pull- down control R CMOS hysteresis type1 CMOS hysteresis type2 Automotive inputs TTL input standby control for input shutdown</p>	<p>CMOS level output (<math>I_{OL} = 3\text{mA}</math>, <math>I_{OH} = -3\text{mA}</math>)      2 different CMOS hysteresis inputs with input shutdown function      Automotive input with input shutdown function      TTL input with input shutdown function      Programmable pull-up resistor: <math>50\text{k}\Omega</math> approx.</p>
D	 <p>pull-up control data line pull- down control R CMOS hysteresis type1 CMOS hysteresis type2 Automotive inputs TTL input standby control for input shutdown analog input</p>	<p>CMOS level output (<math>I_{OL} = 3\text{mA}</math>, <math>I_{OH} = -3\text{mA}</math>)      2 different CMOS hysteresis inputs with input shutdown function      Automotive input with input shutdown function      TTL input with input shutdown function      Programmable pull-up resistor: <math>50\text{k}\Omega</math> approx.      Analog input</p>



# MB91460B Series

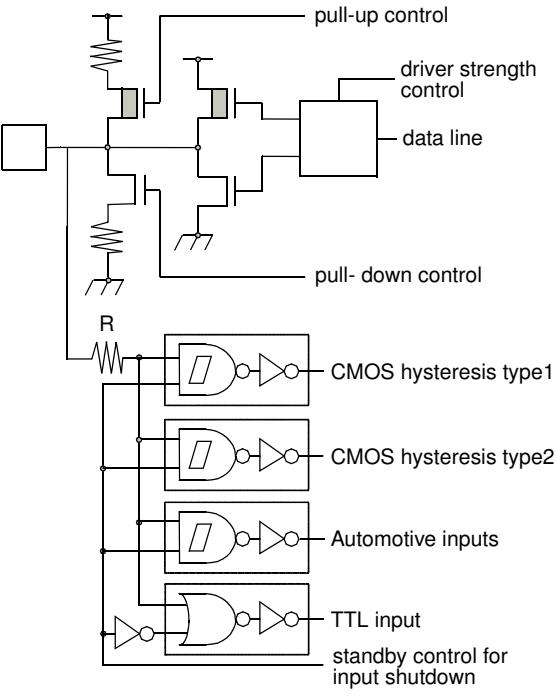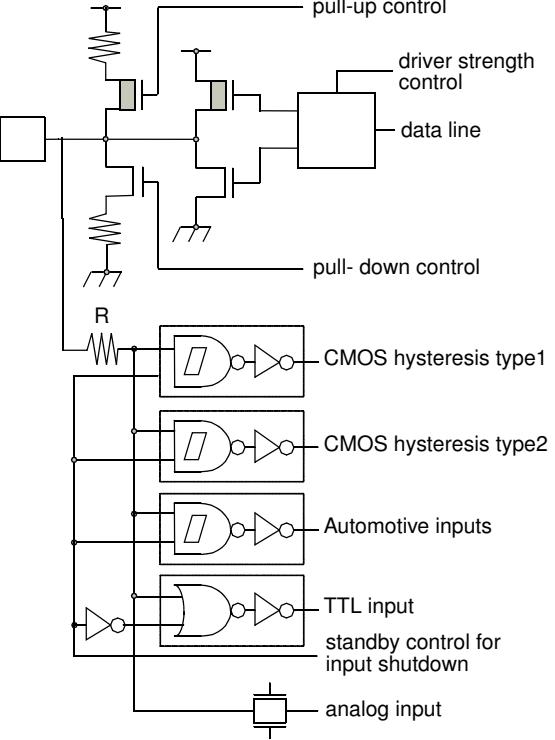Type	Circuit	Remarks
E	 <p>pull-up control driver strength control data line pull- down control   <b>R</b>  CMOS hysteresis type1  CMOS hysteresis type2  Automotive inputs  TTL input  standby control for input shutdown</p>	<p>CMOS level output (programmable <math>I_{OL} = 5\text{mA}</math>, <math>I_{OH} = -5\text{mA}</math> and <math>I_{OL} = 2\text{mA}</math>, <math>I_{OH} = -2\text{mA}</math>, and <math>I_{OL} = 30\text{mA}</math>, <math>I_{OH} = -30\text{mA}</math>) 2 different CMOS hysteresis inputs with input shutdown function Automotive input with input shutdown function TTL input with input shutdown function Programmable pull-up resistor: <math>50\text{k}\Omega</math> approx.</p>
F	 <p>pull-up control driver strength control data line pull- down control   <b>R</b>  CMOS hysteresis type1  CMOS hysteresis type2  Automotive inputs  TTL input  standby control for input shutdown   analog input</p>	<p>CMOS level output (programmable <math>I_{OL} = 5\text{mA}</math>, <math>I_{OH} = -5\text{mA}</math> and <math>I_{OL} = 2\text{mA}</math>, <math>I_{OH} = -2\text{mA}</math>, and <math>I_{OL} = 30\text{mA}</math>, <math>I_{OH} = -30\text{mA}</math>) 2 different CMOS hysteresis inputs with input shutdown function Automotive input with input shutdown function TTL input with input shutdown function Programmable pull-up resistor: <math>50\text{k}\Omega</math> approx. Analog input</p>

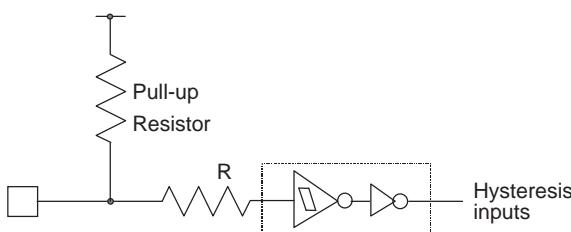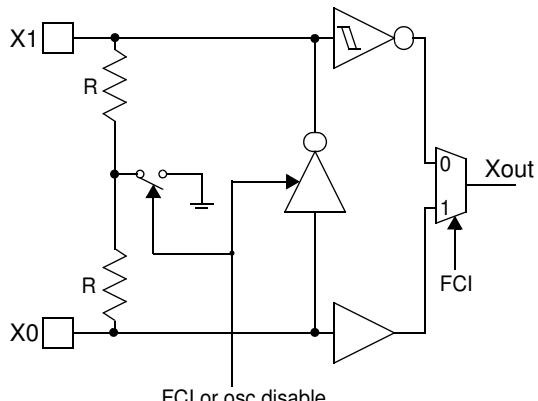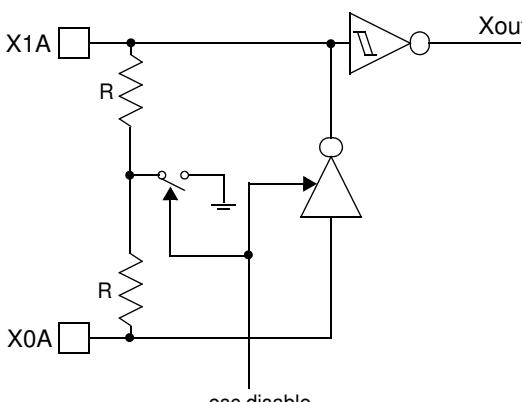Type	Circuit	Remarks
G	 <p>Hysteresis inputs</p>	<p>Mask ROM and EVA device: CMOS Hysteresis input pin Flash device: CMOS input pin 12 V withstand (for MD [2:0])</p>
H	 <p>Pull-up Resistor</p> <p>Hysteresis inputs</p>	<p>CMOS Hysteresis input pin Pull-up resistor value: 50 kΩ approx.</p>
J1	 <p>X1</p> <p>X0</p> <p>FCI or osc disable</p> <p>Xout</p> <p>F1</p>	<p>High-speed oscillation circuit:</p> <ul style="list-style-type: none"> <li>Programmable between oscillation mode (external crystal or resonator connected to X0/X1 pins) and Fast external Clock Input (FCI) mode (external clock connected to X0 pin)</li> <li>Feedback resistor = approx. <math>2 * 0.5 \text{ M}\Omega</math>. Feedback resistor is grounded in the center when the oscillator is disabled or in FCI mode.</li> </ul>
J2	 <p>X1A</p> <p>X0A</p> <p>osc disable</p> <p>Xout</p>	<p>Low-speed oscillation circuit:</p> <ul style="list-style-type: none"> <li>Feedback resistor = approx. <math>2 * 5 \text{ M}\Omega</math>. Feedback resistor is grounded in the center when the oscillator is disabled.</li> </ul>

# MB91460B Series

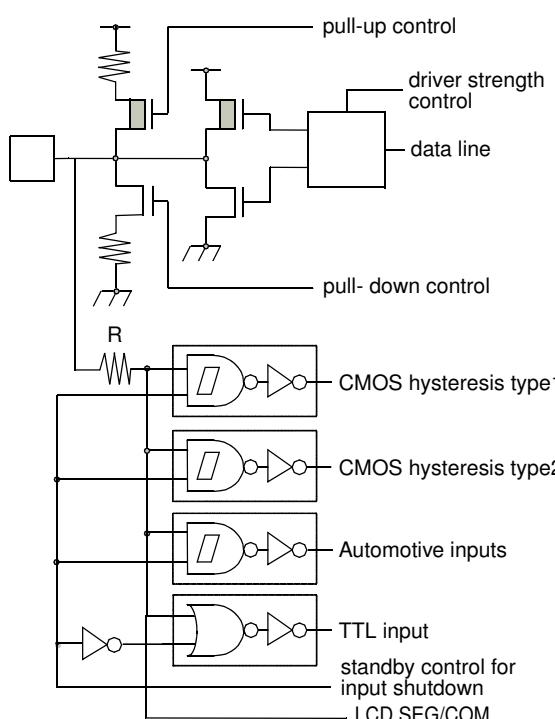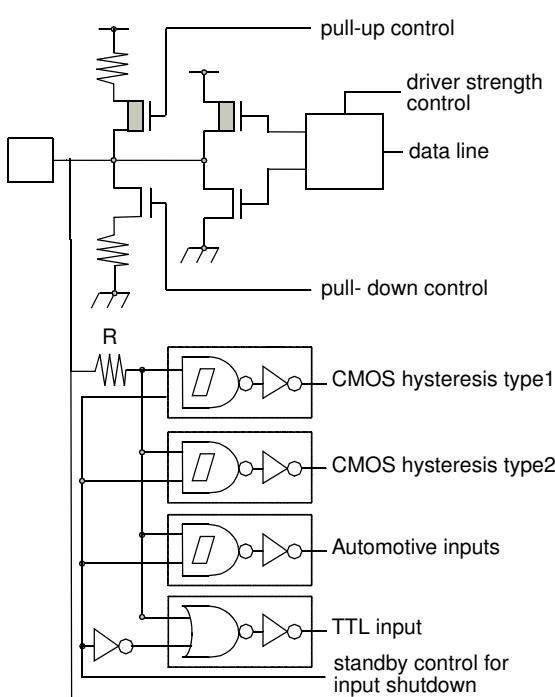Type	Circuit	Remarks
K	 <p>pull-up control driver strength control data line pull- down control R CMOS hysteresis type1 CMOS hysteresis type2 Automotive inputs TTL input standby control for input shutdown LCD SEG/COM</p>	<p>CMOS level output (programmable <math>I_{OL} = 5\text{mA}</math>, <math>I_{OH} = -5\text{mA}</math> and <math>I_{OL} = 2\text{mA}</math>, <math>I_{OH} = -2\text{mA}</math>) 2 different CMOS hysteresis inputs with input shutdown function Automotive input with input shutdown function TTL input with input shutdown function Programmable pull-up resistor: <math>50\text{k}\Omega</math> approx. LCD SEG/COM output</p>
L	 <p>pull-up control driver strength control data line pull- down control R CMOS hysteresis type1 CMOS hysteresis type2 Automotive inputs TTL input standby control for input shutdown VLCD</p>	<p>CMOS level output (programmable <math>I_{OL} = 5\text{mA}</math>, <math>I_{OH} = -5\text{mA}</math> and <math>I_{OL} = 2\text{mA}</math>, <math>I_{OH} = -2\text{mA}</math>) 2 different CMOS hysteresis inputs with input shutdown function Automotive input with input shutdown function TTL input with input shutdown function Programmable pull-up resistor: <math>50\text{k}\Omega</math> approx. Analog input LCD Voltage input</p>

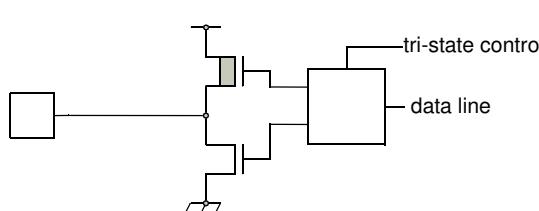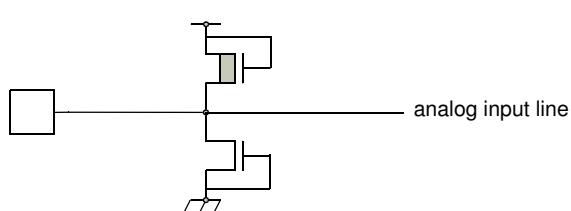Type	Circuit	Remarks
M	 <p>CMOS level tri-state output (<math>I_{OL} = 5\text{mA}</math>, <math>I_{OH} = -5\text{mA}</math>)</p>	
N	 <p>Analog input pin with protection</p>	

# MB91460B Series

## ■ HANDLING DEVICES

### 1. Preventing Latch-up

Latch-up may occur in a CMOS IC if a voltage higher than ( $V_{DD5}$ ,  $V_{DD35}$  or  $HV_{DD5}$  \*) or less than ( $V_{SS5}$  or  $HV_{SS5}$  \*) is applied to an input or output pin or if a voltage exceeding the rating is applied between the power supply pins and ground pins. If latch-up occurs, the power supply current increases rapidly, sometimes resulting in thermal breakdown of the device. Therefore, be very careful not to apply voltages in excess of the absolute maximum ratings.

Note \*1:  $HV_{DD5}$ ,  $HV_{SS5}$  are available only on devices having Stepper Motor Controller.

### 2. Handling of unused input pins

If unused input pins are left open, abnormal operation may result. Any unused input pins should be connected to pull-up or pull-down resistor (2K $\Omega$  to 10K $\Omega$ ) or enable internal pullup or pulldown resistors (PPER/PPCR) before the input enable (PORTEN) is activated by software. The mode pins MD\_x can be connected to  $V_{SS5}$  or  $V_{DD5}$  directly. Unused ALARM input pins can be connected to  $AV_{SS5}$  directly.

### 3. Power supply pins

In MB91460 series, devices including multiple power supply pins and ground pins are designed as follows; pins necessary to be at the same potential are interconnected internally to prevent malfunctions such as latch-up. All of the power supply pins and ground pins must be externally connected to the power supply and ground respectively in order to reduce unnecessary radiation, to prevent strobe signal malfunctions due to the ground level rising and to follow the total output current ratings. Furthermore, the power supply pins and ground pins of the MB91460 series must be connected to the current supply source via a low impedance.

It is also recommended to connect a ceramic capacitor of approximately 0.1  $\mu$ F as a bypass capacitor between power supply pin and ground pin near this device.

This series has a built-in step-down regulator. Connect a bypass capacitor of 4.7  $\mu$ F (use a X7R ceramic capacitor) to VCC18C pin for the regulator.

### 4. Crystal oscillator circuit

Noise in proximity to the X0 (X0A) and X1 (X1A) pins can cause the device to operate abnormally. Printed circuit boards should be designed so that the X0 (X0A) and X1 (X1A) pins, and crystal oscillator, as well as bypass capacitors connected to ground, are located near the device and ground.

It is recommended that the printed circuit board layout be designed such that the X0 and X1 pins or X0A and X1A pins are surrounded by ground plane for the stable operation.

Please request the oscillator manufacturer to evaluate the oscillational characteristics of the crystal and this device.


### 5. Notes on using external clock

When using the external clock, it is necessary to simultaneously supply the X0 (X0A) and the X1 (X1A) pins. In the described combination, X1 (X1A) should be supplied with a clock signal which has the opposite phase to the X0 (X0A) pins. At X0 and X1, a frequency up to 16 MHz is possible.

(Continued)

(Continued)

Example of using opposite phase supply

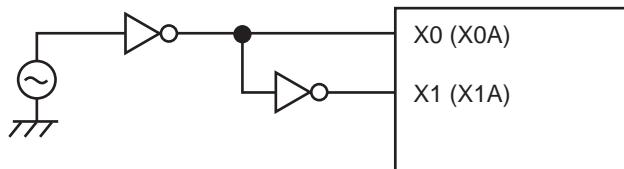

## 6. Mode pins (MD\_x)

These pins should be connected directly to the power supply or ground pins. To prevent the device from entering test mode accidentally due to noise, minimize the lengths of the patterns between each mode pin and power supply pin or ground pin on the printed circuit board as possible and connect them with low impedance.

## 7. Notes on operating in PLL clock mode

If the oscillator is disconnected or the clock input stops when the PLL clock is selected, the microcontroller may continue to operate at the free-running frequency of the self-oscillating circuit of the PLL. However, this self-running operation cannot be guaranteed.

## 8. Pull-up control

The AC standard is not guaranteed in case a pull-up resistor is connected to the pin serving as an external bus pin.

## ■ NOTES ON DEBUGGER

### 1. Execution of the RETI Command

If single-step execution is used in an environment where an interrupt occurs frequently, the corresponding interrupt handling routine will be executed repeatedly to the exclusion of other processing. This will prevent the main routine and the handlers for low priority level interrupts from being executed (For example, if the time-base timer interrupt is enabled, stepping over the RETI instruction will always break on the first line of the time-base timer interrupt handler).

Disable the corresponding interrupts when the corresponding interrupt handling routine no longer needs debugging.

### 2. Break function

If the range of addresses that cause a hardware break (including event breaks) is set to the address of the current system stack pointer or to an area that contains the stack pointer, execution will break after each instruction regardless of whether the user program actually contains data access instructions.

To prevent this, do not set (word) access to the area containing the address of the system stack pointer as the target of the hardware break (including an event breaks).

### 3. Operand break

It may cause malfunctions if a stack pointer exists in the area which is set as the DSU operand break. Do not set the access to the areas containing the address of system stack pointer as a target of data event break.

### 4. Notes on PS register


As the PS register is processed in advance by some instructions, when the debugger is being used, the exception handling may result in execution breaking in an interrupt handling routine or the displayed values of the flags in the PS register being updated.

As the microcontroller is designed to carry out reprocessing correctly upon returning from such an EIT event, the operation before and after the EIT always proceeds according to specification.

- **The following behavior may occur if any of the following occurs in the instruction immediately after a DIV0U/DIV0S instruction:**
  - (a) a user interrupt or NMI is accepted;
  - (b) single-step execution is performed;
  - (c) execution breaks due to a data event or from the emulator menu.
    1. D0 and D1 flags are updated in advance.
    2. An EIT handling routine (user interrupt/NMI or emulator) is executed.
    3. Upon returning from the EIT, the DIV0U/DIV0S instruction is executed and the D0 and D1 flags are updated to the same values as those in 1.
- **The following behavior occurs when an ORCCR, STILM, MOV Ri,PS instruction is executed to enable a user interrupt or NMI source while that interrupt is in the active state.**
  1. The PS register is updated in advance.
  2. An EIT handling routine (user interrupt/NMI or emulator) is executed.
  3. Upon returning from the EIT, the above instructions are executed and the PS register is updated to the same value as in 1.


## ■ BLOCK DIAGRAM

### 1. MB91F467BA/466BA with MD\_3=1

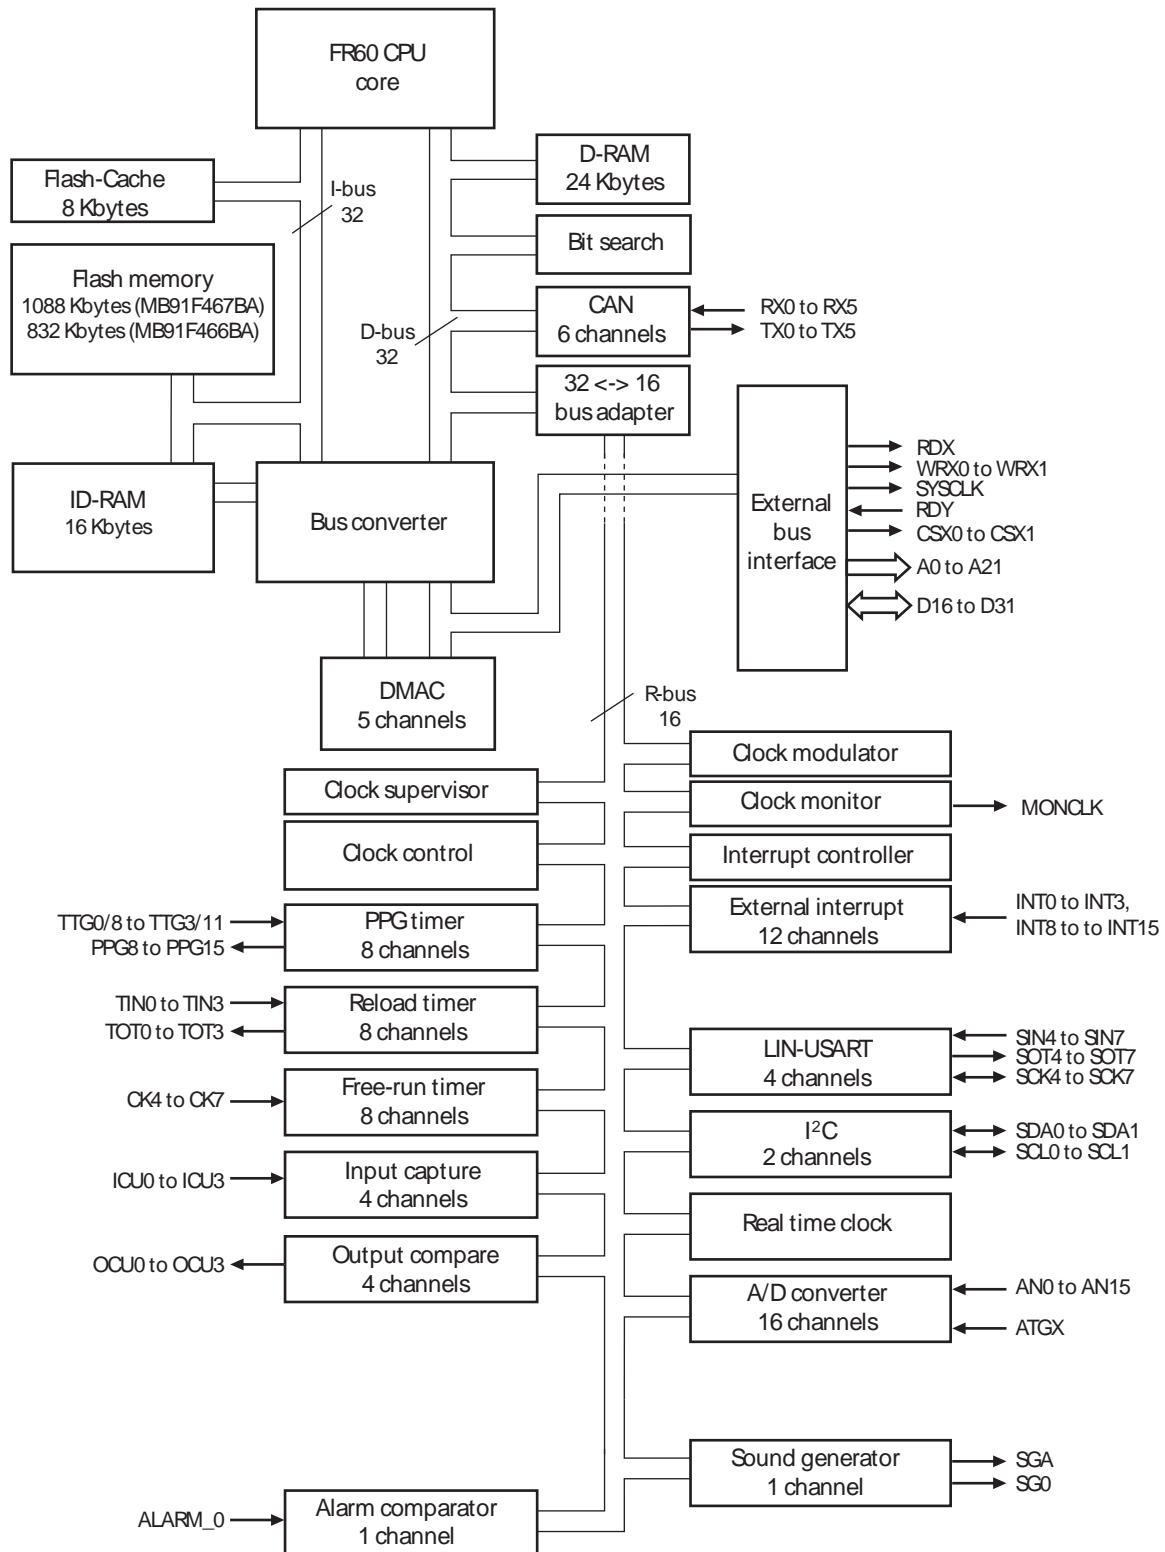


# MB91460B Series

## 2. MB91F467BA/466BA with MD\_3=0

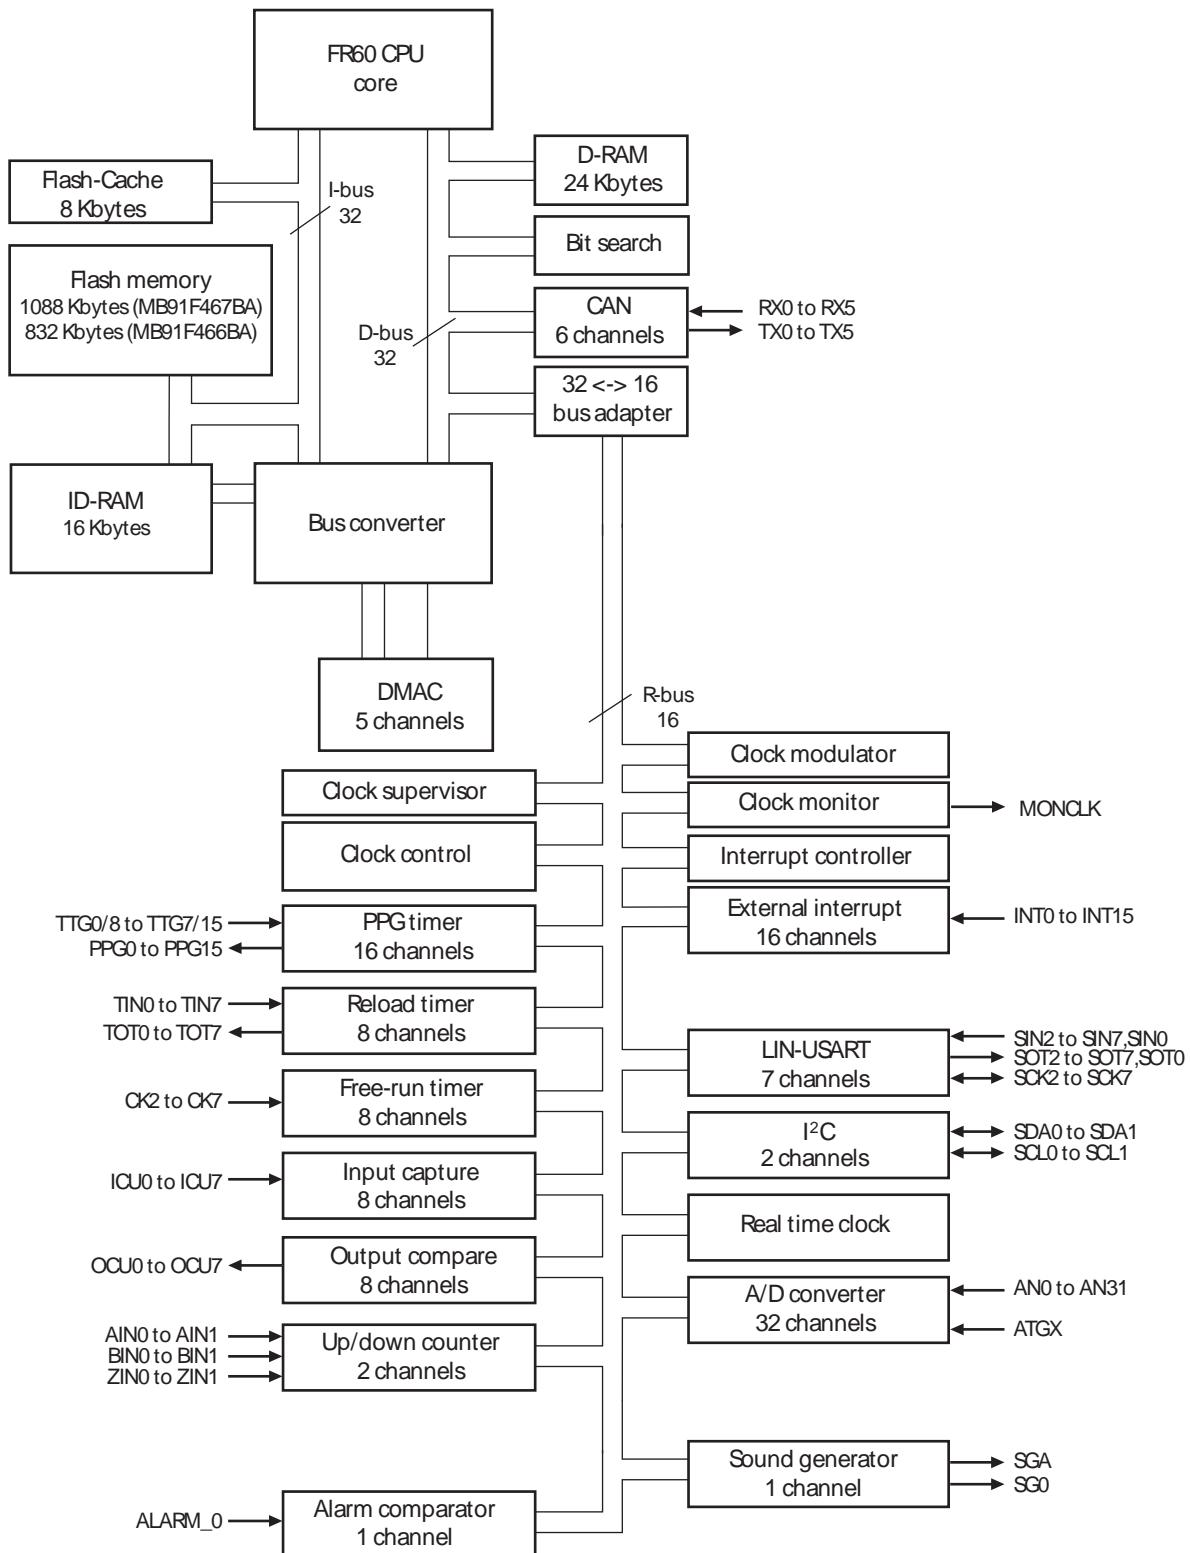


### 3. MB91F465BB/464BB with MD\_3=1

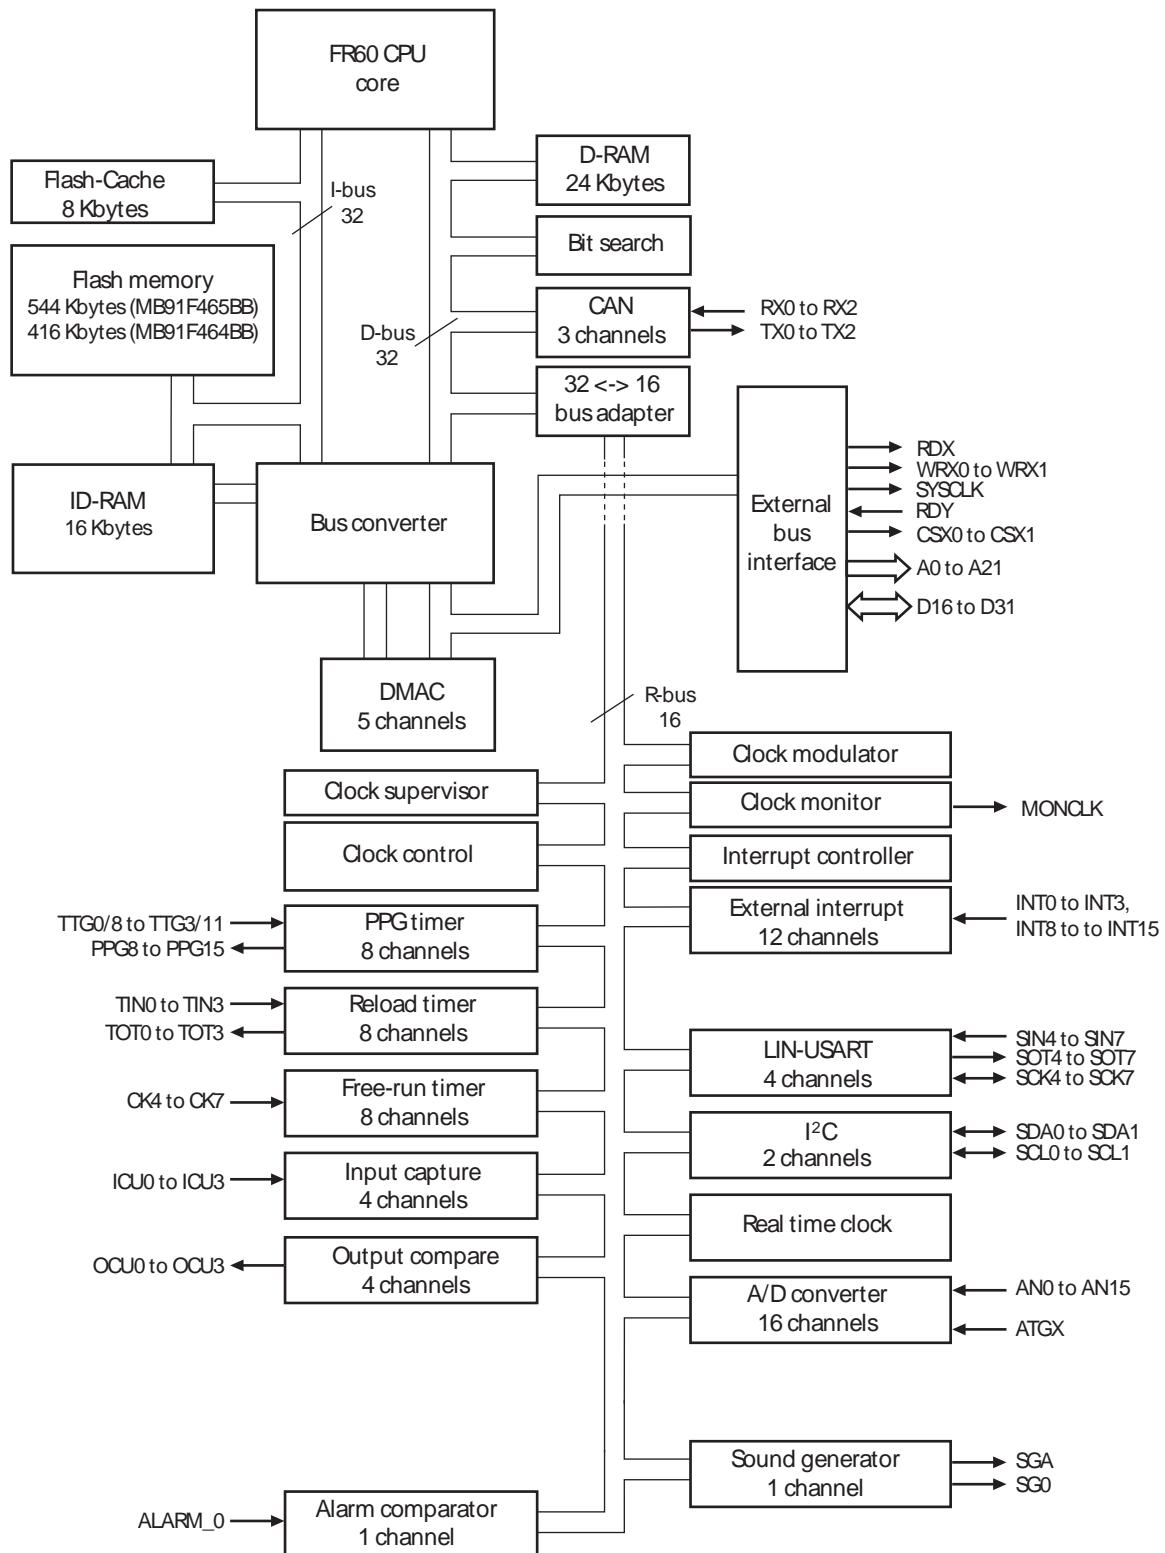

# MB91460B Series

## 4. MB91F465BB/464BB with MD\_3=0

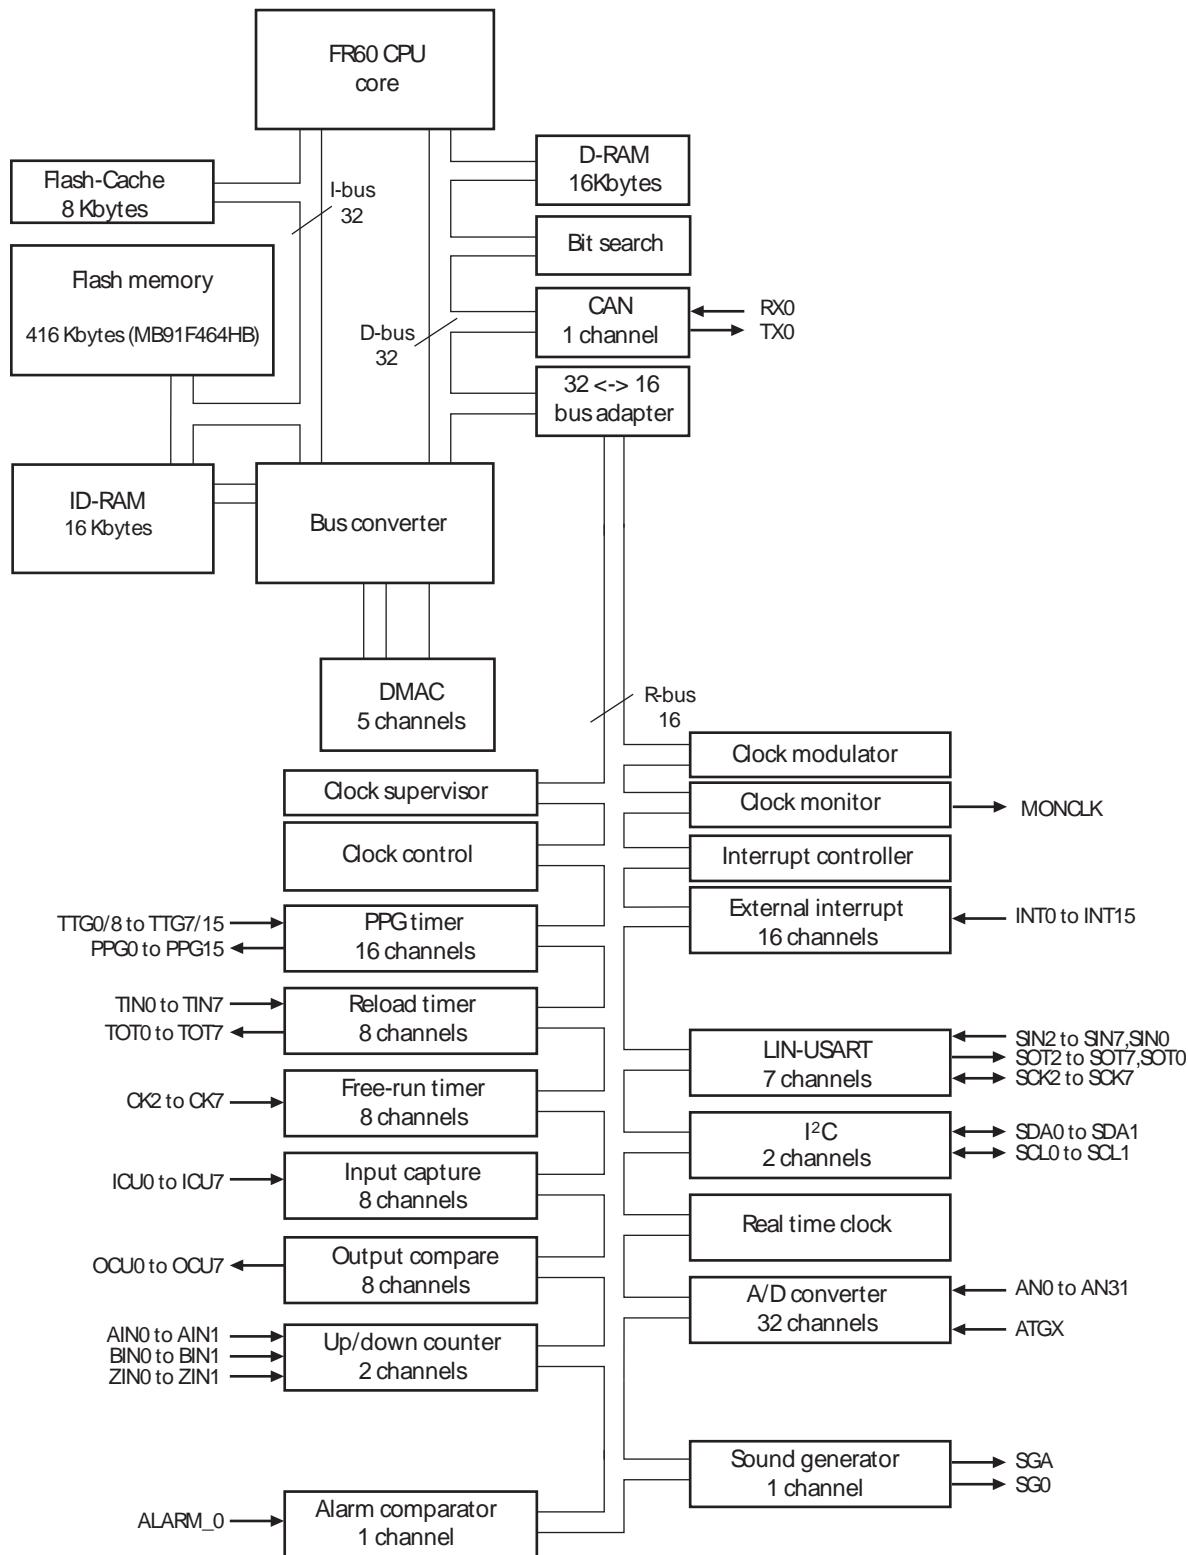

## ■ CPU AND CONTROL UNIT

The FR family CPU is a high performance core that is designed based on the RISC architecture with advanced instructions for embedded applications.

### 1. Features

- Adoption of RISC architecture
  - Basic instruction: 1 instruction per cycle
- General-purpose registers: 32-bit × 16 registers
- 4 Gbytes linear memory space
- Multiplier installed
  - 32-bit × 32-bit multiplication: 5 cycles
  - 16-bit × 16-bit multiplication: 3 cycles
- Enhanced interrupt processing function
  - Quick response speed (6 cycles)
  - Multiple-interrupt support
  - Level mask function (16 levels)
- Enhanced instructions for I/O operation
  - Memory-to-memory transfer instruction
  - Bit processing instruction
  - Basic instruction word length: 16 bits
- Low-power consumption
  - Sleep mode/stop mode


### 2. Internal architecture

- The FR family CPU uses the Harvard architecture in which the instruction bus and data bus are independent of each other.
- A 32-bit ↔ 16-bit buffer is connected to the 32-bit bus (D-bus) to provide an interface between the CPU and peripheral resources.
- A Harvard ↔ Princeton bus converter is connected to both the I-bus and D-bus to provide an interface between the CPU and the bus controller.

# MB91460B Series


## 3. Programming model

### 3.1. Basic programming model

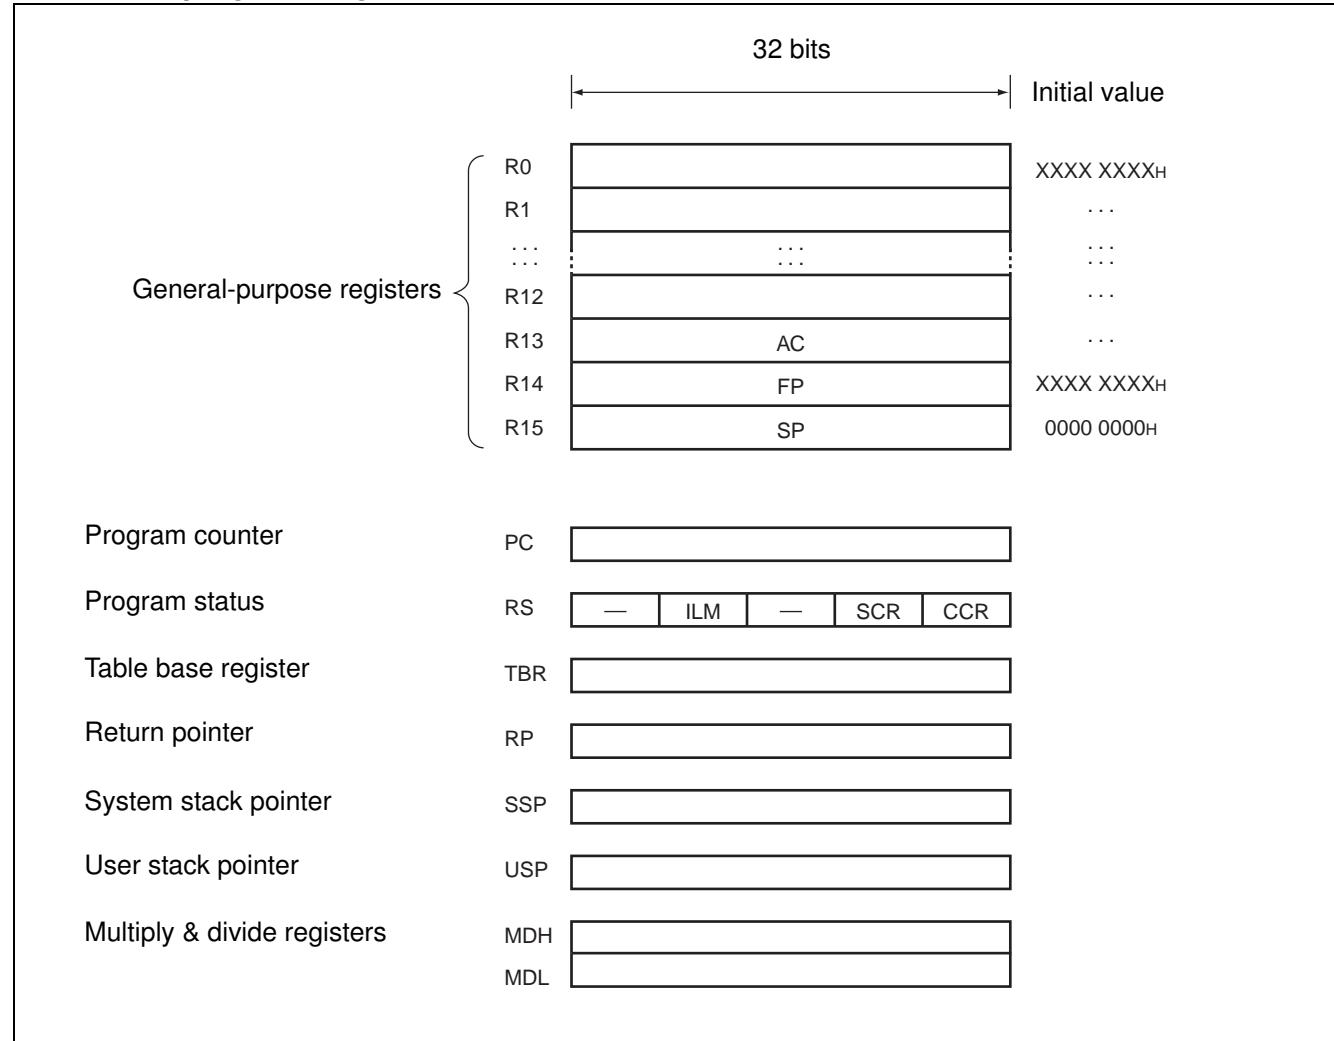

## 4. Registers

### 4.1. General-purpose register

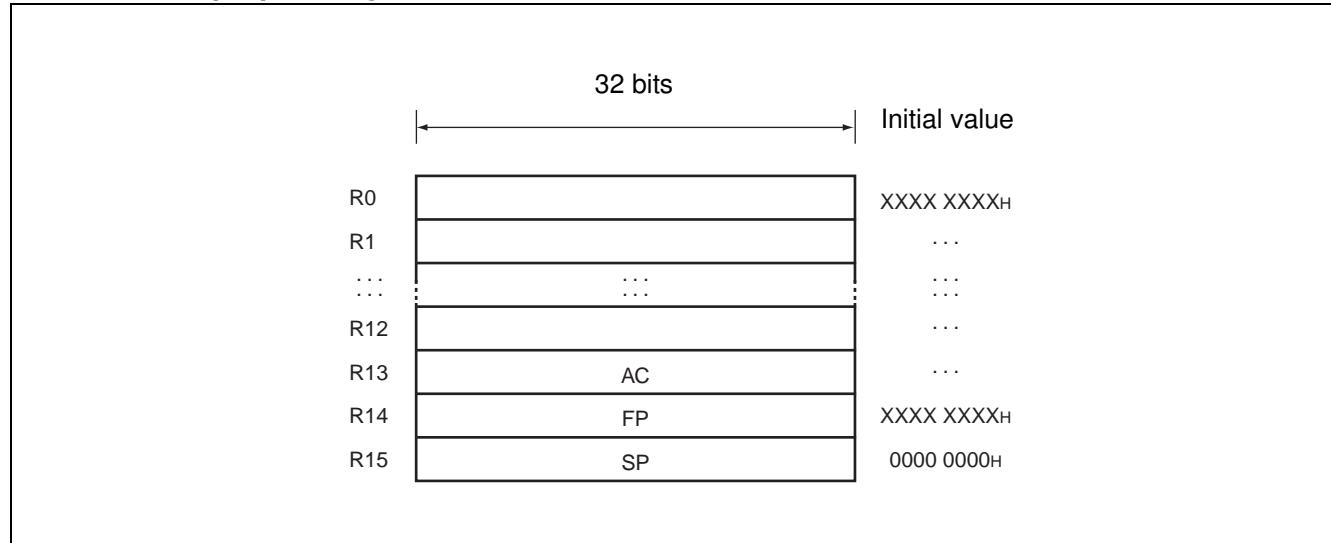

Registers R0 to R15 are general-purpose registers. These registers can be used as accumulators for computation operations and as pointers for memory access.

Of the 16 registers, enhanced commands are provided for the following registers to enable their use for particular applications.

R13 : Virtual accumulator

R14 : Frame pointer


R15 : Stack pointer

Initial values at reset are undefined for R0 to R14. The value for R15 is 00000000H (SSP value).

### 4.2. PS (Program Status)


This register holds the program status, and is divided into three parts, ILM, SCR, and CCR.

All undefined bits (-) in the diagram are reserved bits. The read values are always "0". Write access to these bits is invalid.

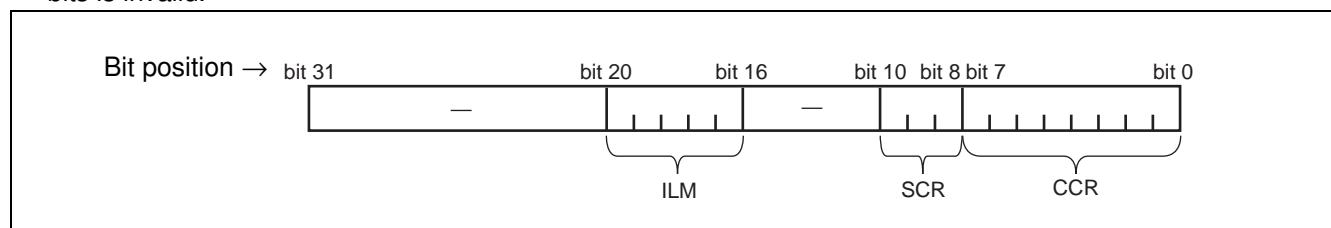

# MB91460B Series

## 4.3. CCR (Condition Code Register)



SV : Supervisor flag

S : Stack flag

I : Interrupt enable flag


N : Negative enable flag

Z : Zero flag

V : Overflow flag

C : Carry flag

## 4.4. SCR (System Condition Register)



Flag for step division (D1, D0)


This flag stores interim data during execution of step division.

Step trace trap flag (T)

This flag indicates whether the step trace trap is enabled or disabled.

The step trace trap function is used by emulators. When an emulator is in use, it cannot be used in execution of user programs.

## 4.5. ILM (Interrupt Level Mask register)



This register stores interrupt level mask values, and the values stored in ILM4 to ILM0 are used for level masking.

The register is initialized to value “01111B” at reset.

## 4.6. PC (Program Counter)



The program counter indicates the address of the instruction that is being executed.

The initial value at reset is undefined.

## 4.7. TBR (Table Base Register)



The table base register stores the starting address of the vector table used in EIT processing.

The initial value at reset is 000FFC00H.

## 4.8. RP (Return Pointer)



The return pointer stores the address for return from subroutines.

During execution of a CALL instruction, the PC value is transferred to this RP register.

During execution of a RET instruction, the contents of the RP register are transferred to PC.

The initial value at reset is undefined.


## 4.9. USP (User Stack Pointer)



The user stack pointer, when the S flag is “1”, this register functions as the R15 register.

- The USP register can also be explicitly specified.  
The initial value at reset is undefined.
- This register cannot be used with RETI instructions.

## 4.10. Multiply & divide registers

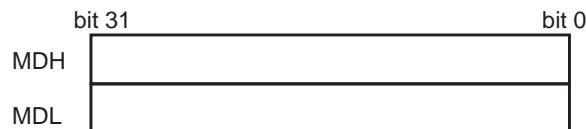

These registers are for multiplication and division, and are each 32 bits in length.

The initial value at reset is undefined.

# MB91460B Series

## ■ EMBEDDED PROGRAM/DATA MEMORY (FLASH)

### 1. Flash features

- MB91F467BA : 1088 Kbytes ( $16 \times 64$  Kbytes +  $8 \times 8$  Kbytes = 8.5 Mbits)
- MB91F466BA : 832 Kbytes ( $12 \times 64$  Kbytes +  $8 \times 8$  Kbytes = 6.5 Mbits)
- MB91F465BB : 544 Kbytes ( $8 \times 64$  Kbytes +  $4 \times 8$  Kbytes = 4.25 Mbits)
- MB91F464BB : 416 Kbytes ( $6 \times 64$  Kbytes +  $4 \times 8$  Kbytes = 3.25 Mbits)
- Programmable wait states for read/write access
- Flash and Boot security with security vector at 0x0014:8000 - 0x0014:800F
- Boot security
- Basic specification: Same as MBM29LV400TC (except size and part of sector configuration)

### 2. Operation modes:

(1) 64-bit CPU mode (available on MB91F467BA/466BA only) :

- CPU reads and executes programs in word (32-bit) length units.
- Flash writing is not possible.
- Actual Flash Memory access is performed in d-word (64-bit) length units.

(2) 32-bit CPU mode:

- CPU reads and executes programs in word (32-bit) length units.
- Actual Flash Memory access is performed in word (32-bit) length units.

(3) 16-bit CPU mode:

- CPU reads and writes in half-word (16-bit) length units.
- Program execution from the Flash is not possible.
- Actual Flash Memory access is performed in word (16-bit) length units.

(4) Flash memory mode (external access to Flash memory enabled)

Note: The operation mode of the flash memory can be selected using a Boot-ROM function. The function start address is 0xBF60. The parameter description is given in the Hardware Manual in chapter 54.6 "Flash Access Mode Switching".

### 3. Flash access in CPU mode

#### 3.1. Flash configuration

##### 3.1.1. Flash memory map MB91F467BA

Address								
0014:FFFFh 0014:C000h	SA6 (8KB)		SA7 (8KB)					
0014:BFFFh 0014:8000h	SA4 (8KB)		SA5 (8KB)					ROMS7
0014:7FFFh 0014:4000h	SA2 (8KB)		SA3 (8KB)					
0014:3FFFh 0014:0000h	SA0 (8KB)		SA1 (8KB)					
0013:FFFFh 0012:0000h	SA22 (64KB)		SA23 (64KB)					ROMS6
0011:FFFFh 0010:0000h	SA20 (64KB)		SA21 (64KB)					
000F:FFFFh 000E:0000h	SA18 (64KB)		SA19 (64KB)					ROMS5
000D:FFFFh 000C:0000h	SA16 (64KB)		SA17 (64KB)					ROMS4
000B:FFFFh 000A:0000h	SA14 (64KB)		SA15 (64KB)					ROMS3
0009:FFFFh 0008:0000h	SA12 (64KB)		SA13 (64KB)					ROMS2
0007:FFFFh 0006:0000h	SA10 (64KB)		SA11 (64KB)					ROMS1
0005:FFFFh 0004:0000h	SA8 (64KB)		SA9 (64KB)					ROMS0
	addr+0	addr+1	addr+2	addr+3	addr+4	addr+5	addr+6	addr+7
16bit read/write	dat[31:16]		dat[15:0]		dat[31:16]		dat[15:0]	
32bit read/write		dat[31:0]				dat[31:0]		
64bit read			dat[63:0]					

# MB91460B Series

## 3.1.2. Flash memory map MB91F466BA

Addr								
0014:FFFFh 0014:C000h	SA6 (8KB)		SA7 (8KB)					
0014:BFFFh 0014:8000h	SA4 (8KB)		SA5 (8KB)					ROMS7
0014:7FFFh 0014:4000h	SA2 (8KB)		SA3 (8KB)					
0014:3FFFh 0014:0000h	SA0 (8KB)		SA1 (8KB)					
0013:FFFFh 0012:0000h	SA22 (64KB)		SA23 (64KB)					ROMS6
0011:FFFFh 0010:0000h	SA20 (64KB)		SA21 (64KB)					ROMS6
000F:FFFFh 000E:0000h	SA18 (64KB)		SA19 (64KB)					ROMS5
000D:FFFFh 000C:0000h	SA16 (64KB)		SA17 (64KB)					ROMS4
000B:FFFFh 000A:0000h	SA14 (64KB)		SA15 (64KB)					ROMS3
0009:FFFFh 0008:0000h	SA12 (64KB)		SA13 (64KB)					ROMS2
0007:FFFFh 0006:0000h	SA10 (64KB)		SA11 (64KB)					ROMS1
0005:FFFFh 0004:0000h	SA8 (64KB)		SA9 (64KB)					ROMS0
16bit read/write	addr+0	addr+1	addr+2	addr+3	addr+4	addr+5	addr+6	addr+7
	dat[31:16]		dat[15:0]		dat[31:16]		dat[15:0]	
32bit read		dat[31:0]			dat[31:0]			
64bit read			dat[63:0]					
Legend	Memory not available in this area				Memory available in this area			

### 3.1.3. Flash memory map MB91F465BB

Addr								
0014:FFFFh 0014:C000h	SA6 (8KB)		SA7 (8KB)					
0014:BFFFh 0014:8000h	SA4 (8KB)		SA5 (8KB)					ROMS7
0014:7FFFh 0014:4000h	SA2 (8KB)		SA3 (8KB)					
0014:3FFFh 0014:0000h	SA0 (8KB)		SA1 (8KB)					
0013:FFFFh 0012:0000h	SA22 (64KB)		SA23 (64KB)					ROMS6
0011:FFFFh 0010:0000h	SA20 (64KB)		SA21 (64KB)					ROMS6
000F:FFFFh 000E:0000h	SA18 (64KB)		SA19 (64KB)					ROMS5
000D:FFFFh 000C:0000h	SA16 (64KB)		SA17 (64KB)					ROMS4
000B:FFFFh 000A:0000h	SA14 (64KB)		SA15 (64KB)					ROMS3
0009:FFFFh 0008:0000h	SA12 (64KB)		SA13 (64KB)					ROMS2
0007:FFFFh 0006:0000h	SA10 (64KB)		SA11 (64KB)					ROMS1
0005:FFFFh 0004:0000h	SA8 (64KB)		SA9 (64KB)					ROMS0
16bit read/write	addr+0	addr+1	addr+2	addr+3	addr+4	addr+5	addr+6	addr+7
	dat[31:16]		dat[15:0]		dat[31:16]		dat[15:0]	
32bit read		dat[31:0]			dat[31:0]			
Legend	Memory not available in this area				Memory available in this area			

# MB91460B Series

## 3.1.4. Flash memory map MB91F464BB

Address								
0014:FFFFh 0014:C000h	SA6 (8KB)		SA7 (8KB)					
0014:BFFFh 0014:8000h	SA4 (8KB)		SA5 (8KB)					ROMS7
0014:7FFFh 0014:4000h	SA2 (8KB)		SA3 (8KB)					
0014:3FFFh 0014:0000h	SA0 (8KB)		SA1 (8KB)					
0013:FFFFh 0012:0000h	SA22 (64KB)		SA23 (64KB)					ROMS6
0011:FFFFh 0010:0000h	SA20 (64KB)		SA21 (64KB)					ROMS6
000F:FFFFh 000E:0000h	SA18 (64KB)		SA19 (64KB)					ROMS5
000D:FFFFh 000C:0000h	SA16 (64KB)		SA17 (64KB)					ROMS4
000B:FFFFh 000A:0000h	SA14 (64KB)		SA15 (64KB)					ROMS3
0009:FFFFh 0008:0000h	SA12 (64KB)		SA13 (64KB)					ROMS2
0007:FFFFh 0006:0000h	SA10 (64KB)		SA11 (64KB)					ROMS1
0005:FFFFh 0004:0000h	SA8 (64KB)		SA9 (64KB)					ROMS0
16bit read/write	addr+0	addr+1	addr+2	addr+3	addr+4	addr+5	addr+6	addr+7
32bit read	dat[31:16]		dat[15:0]		dat[31:16]		dat[15:0]	
	dat[31:0]				dat[31:0]			
Legend	Memory not available in this area				Memory available in this area			

## 3.2. Flash access timing settings in CPU mode

The following tables list all settings for a given maximum Core Frequency (through the setting of CLKB or maximum clock modulation) for Flash read and write access.

### 3.2.1. Flash read timing settings (synchronous read)

Core clock (CLKB)	ATD	ALEH	EQ	WEXH	WTC	Remark
to 24 MHz	0	0	0	-	1	
to 48 MHz	0	0	1	-	2	
to 96 MHz	1	1	3	-	4	
to 100 MHz	1	1	3	-	4	not available on MB91F467BA/ MB91F466BA

### 3.2.2. Flash write timing settings (synchronous write)

Core clock (CLKB)	ATD	ALEH	EQ	WEXH	WTC	Remark
to 16 MHz	0	-	-	0	3	
to 32 MHz	0	-	-	0	4	
to 48 MHz	0	-	-	0	5	
to 64 MHz	1	-	-	0	6	
to 96 MHz	1	-	-	0	7	
to 100 MHz	1	-	-	0	7	not available on MB91F467BA/ MB91F466BA

# MB91460B Series

### 3.3. Address mapping from CPU to parallel programming mode

The following tables show the calculation from CPU addresses to flash macro addresses which are used in parallel programming.

#### 3.3.1. Address mapping MB91F467BA

CPU Address (addr)	Condition	Flash sectors	FA (flash address) Calculation
14:0000h to 14:FFFFh	addr[2]==0	SA0, SA2, SA4, SA6 (8 Kbyte)	FA := addr - addr%00:4000h + (addr%00:4000h)/2 - (addr/2)%4 + addr%4 - 05:0000h
14:0000h to 14:FFFFh	addr[2]==1	SA1, SA3, SA5, SA7 (8 Kbyte)	FA := addr - addr%00:4000h + (addr%00:4000h)/2 + 00:2000h - (addr/2)%4 + addr%4 - 05:0000h
04:0000h to 13:FFFFh	addr[2]==0	SA8, SA10, SA12, SA14, SA16, SA18, SA20, SA22 (64 Kbyte)	FA := addr - addr%02:0000 + (addr%02:0000h)/2 - (addr/2)%4 + addr%4 + 0C:0000h
04:0000h to 13:FFFFh	addr[2]==1	SA9, SA11, SA13, SA15, SA17, SA19, SA21, SA23 (64 Kbyte)	FA := addr - addr%02:0000h + (addr%02:0000h)/2 + 01:0000h - (addr/2)%4 + addr%4 + 0C:0000h

Note: FA result is without 20:0000h offset for parallel Flash programming .

Set offset by keeping FA[21] = 1 as described in section “Parallel Flash programming mode”.

#### 3.3.2. Address mapping MB91F466BA

CPU Address (addr)	Condition	Flash sectors	FA (flash address) Calculation
14:0000h to 14:FFFFh	addr[2]==0	SA0, SA2, SA4, SA6 (8 Kbyte)	FA := addr - addr%00:4000h + (addr%00:4000h)/2 - (addr/2)%4 + addr%4 - 05:0000h
14:0000h to 14:FFFFh	addr[2]==1	SA1, SA3, SA5, SA7 (8 Kbyte)	FA := addr - addr%00:4000h + (addr%00:4000h)/2 + 00:2000h - (addr/2)%4 + addr%4 - 05:0000h
04:0000h to 0F:FFFFh	addr[2]==0	SA8, SA10, SA12, SA14, SA16, SA18 (64 Kbyte)	FA := addr - addr%02:0000 + (addr%02:0000h)/2 - (addr/2)%4 + addr%4 + 0C:0000h
04:0000h to 0F:FFFFh	addr[2]==1	SA9, SA11, SA13, SA15, SA17, SA19 (64 Kbyte)	FA := addr - addr%02:0000h + (addr%02:0000h)/2 + 01:0000h - (addr/2)%4 + addr%4 + 0C:0000h

Note: FA result is without 20:0000h offset for parallel Flash programming .

Set offset by keeping FA[21] = 1 as described in section “Parallel Flash programming mode”.

### 3.3.3. Address mapping MB91F465BB

CPU Address (addr)	Condition	Flash sectors	FA (flash address) Calculation
14:8000h to 14:FFFFh	addr[2]==0	SA4, SA6 (8 Kbyte)	FA := addr - addr%00:4000h + (addr%00:4000h)/2 - (addr/2)%4 + addr%4 - 0D:0000h
14:8000h to 14:FFFFh	addr[2]==1	SA5, SA7 (8 Kbyte)	FA := addr - addr%00:4000h + (addr%00:4000h)/2 + 00:2000h - (addr/2)%4 + addr%4 - 0D:0000h
08:0000h to 0F:FFFFh	addr[2]==0	SA12, SA14, SA16, SA18 (64 Kbyte)	FA := addr - addr%02:0000 + (addr%02:0000h)/2 - (addr/2)%4 + addr%4
08:0000h to 0F:FFFFh	addr[2]==1	SA13, SA15, SA17, SA19 (64 Kbyte)	FA := addr - addr%02:0000h + (addr%02:0000h)/2 + 01:0000h - (addr/2)%4 + addr%4

Note: FA result is without 20:0000h offset for parallel Flash programming .

Set offset by keeping FA[21] = 1 as described in section “Parallel Flash programming mode”.

### 3.3.4. Address mapping MB91F464BB

CPU Address (addr)	Condition	Flash sectors	FA (flash address) Calculation
14:8000h to 14:FFFFh	addr[2]==0	SA4, SA6 (8 Kbyte)	FA := addr - addr%00:4000h + (addr%00:4000h)/2 - (addr/2)%4 + addr%4 - 0D:0000h
14:8000h to 14:FFFFh	addr[2]==1	SA5, SA7 (8 Kbyte)	FA := addr - addr%00:4000h + (addr%00:4000h)/2 + 00:2000h - (addr/2)%4 + addr%4 - 0D:0000h
0A:0000h to 0F:FFFFh	addr[2]==0	SA14, SA16, SA18 (64 Kbyte)	FA := addr - addr%02:0000 + (addr%02:0000h)/2 - (addr/2)%4 + addr%4
0A:0000h to 0F:FFFFh	addr[2]==1	SA15, SA17, SA19 (64 Kbyte)	FA := addr - addr%02:0000h + (addr%02:0000h)/2 + 01:0000h - (addr/2)%4 + addr%4

Note: FA result is without 20:0000h offset for parallel Flash programming .

Set offset by keeping FA[21] = 1 as described in section “Parallel Flash programming mode”.

# MB91460B Series

## 4. Parallel Flash programming mode

### 4.1. Flash configuration in parallel Flash programming mode

Parallel Flash programming mode (MD[2:0] = 111):

MB91F467BA

FA[21:0]	
003F:FFFFh 003F:0000h	SA23 (64KB)
003E:FFFFh 003E:0000h	SA22 (64KB)
003D:FFFFh 003D:0000h	SA21 (64KB)
003C:FFFFh 003C:0000h	SA20 (64KB)
003B:FFFFh 003B:0000h	SA19 (64KB)
003A:FFFFh 003A:0000h	SA18 (64KB)
0039:FFFFh 0039:0000h	SA17 (64KB)
0038:FFFFh 0038:0000h	SA16 (64KB)
0037:FFFFh 0037:0000h	SA15 (64KB)
0036:FFFFh 0036:0000h	SA14 (64KB)
0035:FFFFh 0035:0000h	SA13 (64KB)
0034:FFFFh 0034:0000h	SA12 (64KB)
0033:FFFFh 0033:0000h	SA11 (64KB)
0032:FFFFh 0032:0000h	SA10 (64KB)
0031:FFFFh 0031:0000h	SA9 (64KB)
0030:FFFFh 0030:0000h	SA8 (64KB)
002F:FFFFh 002F:E000h	SA7 (8KB)
002F:DFFFh 002F:C000h	SA6 (8KB)
002F:BFFFh 002F:A000h	SA5 (8KB)
002F:9FFFh 002F:8000h	SA4 (8KB)
002F:7FFFh 002F:6000h	SA3 (8KB)
002F:5FFFh 002F:4000h	SA2 (8KB)
002F:3FFFh 002F:2000h	SA1 (8KB)
002F:1FFFh 002F:0000h	SA0 (8KB)
FA[1:0]=00	FA[1:0]=10
DQ[15:0]	DQ[15:0]

16bit write mode

MB91F466BA

FA[21:0]
SA23 (64KB)
SA22 (64KB)
SA21 (64KB)
SA20 (64KB)
SA19 (64KB)
SA18 (64KB)
SA17 (64KB)
SA16 (64KB)
SA15 (64KB)
SA14 (64KB)
SA13 (64KB)
SA12 (64KB)
SA11 (64KB)
SA10 (64KB)
SA9 (64KB)
SA8 (64KB)
SA7 (8KB)
SA6 (8KB)
SA5 (8KB)
SA4 (8KB)
SA3 (8KB)
SA2 (8KB)
SA1 (8KB)
SA0 (8KB)
FA[1:0]=00
DQ[15:0]

16bit write mode

Remark: Always keep FA[0] = 0 and FA[21] = 1

# MB91460B Series

MB91F465BB

FA[20:0]	
001F:FFFFh 001F:0000h	SA19 (64KB)
001E:FFFFh 001E:0000h	SA18 (64KB)
001D:FFFFh 001D:0000h	SA17 (64KB)
001C:FFFFh 001C:0000h	SA16 (64KB)
001B:FFFFh 001B:0000h	SA15 (64KB)
001A:FFFFh 001A:0000h	SA14 (64KB)
0019:FFFFh 0019:0000h	SA13 (64KB)
0018:FFFFh 0018:0000h	SA12 (64KB)
	SA11 (64KB)
	SA10 (64KB)
	SA9 (64KB)
	SA8 (64KB)
0017:FFFFh 0017:E000h	SA7 (8KB)
0017:DFFFh 0017:C000h	SA6 (8KB)
0017:BFFFh 0017:A000h	SA5 (8KB)
0017:9FFFh 0017:8000h	SA4 (8KB)
	SA3 (8KB)
	SA2 (8KB)
	SA1 (8KB)
	SA0 (8KB)
FA[1:0]=00	FA[1:0]=10
DQ[15:0]	DQ[15:0]

16bit write mode

Remark: Always keep FA[0] = 0 and FA[20] = 1

Legend

Memory available in this area

Memory not available in this area

MB91F464BB

FA[20:0]	
001F:FFFFh 001F:0000h	SA19 (64KB)
001E:FFFFh 001E:0000h	SA18 (64KB)
001D:FFFFh 001D:0000h	SA17 (64KB)
001C:FFFFh 001C:0000h	SA16 (64KB)
001B:FFFFh 001B:0000h	SA15 (64KB)
001A:FFFFh 001A:0000h	SA14 (64KB)
	SA13 (64KB)
	SA12 (64KB)
	SA11 (64KB)
	SA10 (64KB)
	SA9 (64KB)
	SA8 (64KB)
0017:FFFFh 0017:E000h	SA7 (8KB)
0017:DFFFh 0017:C000h	SA6 (8KB)
0017:BFFFh 0017:A000h	SA5 (8KB)
0017:9FFFh 0017:8000h	SA4 (8KB)
	SA3 (8KB)
	SA2 (8KB)
	SA1 (8KB)
	SA0 (8KB)
FA[1:0]=00	FA[1:0]=10
DQ[15:0]	DQ[15:0]

16bit write mode

Remark: Always keep FA[0] = 0 and FA[20] = 1

Legend

Memory available in this area

Memory not available in this area

# MB91460B Series

## 4.2. Pin connections in parallel programming mode

Resetting after setting the MD[2:0] pins to [111] will halt CPU functioning. At this time, the Flash memory's interface circuit enables direct control of the Flash memory unit from external pins by directly linking some of the signals to GP-Ports. Please see table below for signal mapping.

In this mode, the Flash memory appears to the external pins as a stand-alone unit. This mode is generally set when writing/erasing using the parallel Flash programmer. In this mode, all operations of the 8.5 Mbits Flash memory's Auto Algorithms are available.

Correspondence between MBM29LV400TC and Flash Memory Control Signals

MBM29LV400TC External pins	FR-CPU mode	MB91F467BA/466BA/F465BB/F464BB external pins			Comment
		Flash memory mode	Normal function	Pin number	
-	INITX	-	INITX	84	
RESET	-	FRSTX	GP16_6	70	
-	-	MD2	MD2	76	Set to '1'
-	-	MD1	MD1	75	Set to '1'
-	-	MD0	MD0	74	Set to '1'
RY/BY	FMCS:RDY bit	RY/BYX	GP18_2	100	
BYTE	Internally fixed to 'H'	BYTEX	GP16_4	68	
WE	Internal control signal + control via interface circuit	WEX	GP16_7	71	
OE		OEX	GP07_7	3	
CE		CEX	GP07_6	2	
-		ATDIN	GP18_6	103	Set to '0'
-		EQIN	GP18_5	102	Set to '0'
-		TESTX	GP16_5	69	Set to '1'
-		RDYI	GP18_4	101	Set to '0'
A-1		FA0	GP05_5	17	Set to '0'
A0 to A3	Internal address bus	FA1 to FA4	GP19_0 to GP19_2, GP19_4	92 to 95	
A4 to A7		FA5 to FA8	GP19_5 to GP19_6, GP18_0 to GP18_1	96 to 99	
A8 to A11		FA9 to FA12	GP06_0 to GP06_3	4 to 7	
A12 to A15		FA13 to FA16	GP06_4 to GP06_7	8 to 11	
A16 to A18		FA17 to FA19	GP05_0 to GP05_2	12 to 14	
A19		FA20	GP05_3	15	See note *1
-		FA21	GP05_4	16	See note *2
DQ0 to DQ7	Internal data bus	DQ0 to DQ7	GP00_0 to GP00_7	28 to 35	
DQ8 to DQ15		DQ8 to DQ15	GP01_0 to GP01_7	20 to 27	

1. A19 is used as address bit on MB91F467BA/F466BA. For MB91F465BB/F464BB, set this pin to '1'.
2. For MB91F467BA/F466BA, set this pin to '1'. For MB91F465BB/F464BB, this pin can be left open.

## 5. Poweron Sequence in parallel programming mode

The flash memory can be accessed in programming mode after a certain wait time, which is needed for Security Vector fetch:

- Minimum wait time after VDD5/VDD5R power on: 2.76 ms
- Minimum wait time after INITX rising: 1.0 ms

## 6. Flash Security

### 6.1. Vector addresses

Two Flash Security Vectors (FSV1, FSV2) are located parallel to the Boot Security Vectors (BSV1, BSV2) controlling the protection functions of the Flash Security Module:

FSV1: 0x14:8000      BSV1: 0x14:8004  
FSV2: 0x14:8008      BSV2: 0x14:800C

### 6.2. Security Vector FSV1

The setting of the Flash Security Vector FSV1 is responsible for the read and write protection modes and the individual write protection of the 8 KBytes sectors.

#### 6.2.1. FSV1 (bit31 to bit16)

The setting of the Flash Security Vector FSV1 bits [31:16] is responsible for the read and write protection modes.

Explanation of the bits in the Flash Security Vector FSV1[31:16]

FSV1[31:19]	FSV1[18] Write Protection Level	FSV1[17] Write Protection	FSV1[16] Read Protection	Flash Security Mode
set all to '0'	set to '0'	set to '0'	set to '1'	Read Protection (all device modes, except INTVEC mode MD[2:0]="000")
set all to '0'	set to '0'	set to '1'	set to '0'	Write Protection (all device modes, without exception)
set all to '0'	set to '0'	set to '1'	set to '1'	Read Protection (all device modes, except INTVEC mode MD[2:0]="000") and Write Protection (all device modes)
set all to '0'	set to '1'	set to '0'	set to '1'	Read Protection (all device modes, except INTVEC mode MD[2:0]="000")
set all to '0'	set to '1'	set to '1'	set to '0'	Write Protection (all device modes, except INTVEC mode MD[2:0]="000")
set all to '0'	set to '1'	set to '1'	set to '1'	Read Protection (all device modes, except INTVEC mode MD[2:0]="000") and Write Protection (all device modes except INTVEC mode MD[2:0]="000")

# MB91460B Series

## 6.2.2. FSV1 (bit15 to bit0) MB91F467BA/466BA

The setting of the Flash Security Vector FSV1 bits [15:0] is responsible for the individual write protection of the 8 KBytes sectors. It is only evaluated if write protection bit FSV1[17] is set.

Explanation of the bits in the Flash Security Vector FSV1[15:0]

FSV1 bit	Sector	Enable Write Protection	Disable Write Protection	Comment
FSV1[0]	SA0	set to "0"	set to "1"	
FSV1[1]	SA1	set to "0"	set to "1"	
FSV1[2]	SA2	set to "0"	set to "1"	
FSV1[3]	SA3	set to "0"	set to "1"	
FSV1[4]	SA4	set to "0"	—	Write protection is mandatory!
FSV1[5]	SA5	set to "0"	set to "1"	
FSV1[6]	SA6	set to "0"	set to "1"	
FSV1[7]	SA7	set to "0"	set to "1"	
FSV1[15:8]	—	—	—	not available

Note: It is mandatory to always set the sector where the Flash Security Vectors FSV1 and FSV2 are located to write protected (here sector SA4). Otherwise it is possible to overwrite the Security Vector to a setting where it is possible to either read out the Flash content or manipulate data by writing.

See section “Flash access in CPU mode” for an overview about the sector organisation of the Flash Memory.

## 6.2.3. FSV1 (bit15 to bit0) MB91F465BB/464BB

The setting of the Flash Security Vector FSV1 bits [15:0] is responsible for the individual write protection of the 8 KBytes sectors. It is only evaluated if write protection bit FSV1[17] is set.

Explanation of the bits in the Flash Security Vector FSV1[15:0]

FSV1 bit	Sector	Enable Write Protection	Disable Write Protection	Comment
FSV1[3:0]	—	—	—	not available
FSV1[4]	SA4	set to "0"	—	Write protection is mandatory!
FSV1[5]	SA5	set to "0"	set to "1"	
FSV1[6]	SA6	set to "0"	set to "1"	
FSV1[7]	SA7	set to "0"	set to "1"	
FSV1[15:8]	—	—	—	not available

Note: It is mandatory to always set the sector where the Flash Security Vectors FSV1 and FSV2 are located to write protected (here sector SA4). Otherwise it is possible to overwrite the Security Vector to a setting where it is possible to either read out the Flash content or manipulate data by writing.

See section “Flash access in CPU mode” for an overview about the sector organisation of the Flash Memory.

### 6.3. Security Vector FSV2 MB91F467BA/466BA

The setting of the Flash Security Vector FSV2 bits [31:0] is responsible for the individual write protection of the 64 KByte sectors. It is only evaluated if write protection bit FSV1[17] is set.

Explanation of the bits in the Flash Security Vector FSV2[31:0]

FSV2 bit	Sector	Enable Write Protection	Disable Write Protection	Comment
FSV2[0]	SA8	set to "0"	set to "1"	
FSV2[1]	SA9	set to "0"	set to "1"	
FSV2[2]	SA10	set to "0"	set to "1"	
FSV2[3]	SA11	set to "0"	set to "1"	
FSV2[4]	SA12	set to "0"	set to "1"	
FSV2[5]	SA13	set to "0"	set to "1"	
FSV2[6]	SA14	set to "0"	set to "1"	
FSV2[7]	SA15	set to "0"	set to "1"	
FSV2[8]	SA16	set to "0"	set to "1"	
FSV2[9]	SA17	set to "0"	set to "1"	
FSV2[10]	SA18	set to "0"	set to "1"	
FSV2[11]	SA19	set to "0"	set to "1"	
FSV2[12]	SA20 (MB91F467BA)	set to "0"	set to "1"	
FSV2[13]	SA21 (MB91F467BA)	set to "0"	set to "1"	
FSV2[14]	SA22 (MB91F467BA)	set to "0"	set to "1"	
FSV2[15]	SA23 (MB91F467BA)	set to "0"	set to "1"	
FSV2[31:16]	—	set to "0"	set to "1"	not available

Note : See section "Flash access in CPU mode" for an overview about the sector organisation of the Flash Memory.

# MB91460B Series

## 6.4. Security Vector FSV2 MB91F465BB/464BB

The setting of the Flash Security Vector FSV2 bits [31:0] is responsible for the individual write protection of the 64 KByte sectors. It is only evaluated if write protection bit FSV1[17] is set.

Explanation of the bits in the Flash Security Vector FSV2[31:0]

FSV2 bit	Sector	Enable Write Protection	Disable Write Protection	Comment
FSV2[3:0]	—	—	—	not available
FSV2[4]	SA12 (MB91F465BB)	set to “0”	set to “1”	
FSV2[5]	SA13 (MB91F465BB)	set to “0”	set to “1”	
FSV2[6]	SA14	set to “0”	set to “1”	
FSV2[7]	SA15	set to “0”	set to “1”	
FSV2[8]	SA16	set to “0”	set to “1”	
FSV2[9]	SA17	set to “0”	set to “1”	
FSV2[10]	SA18	set to “0”	set to “1”	
FSV2[11]	SA19	set to “0”	set to “1”	
FSV2[31:12]	—	—	—	not available

Note : See section “Flash access in CPU mode” for an overview about the sector organisation of the Flash Memory.

## ■ MEMORY SPACE

The FR family has 4 Gbytes of logical address space ( $2^{32}$  addresses) available to the CPU by linear access.

- Direct addressing area

The following address space area is used for I/O.

This area is called direct addressing area, and the address of an operand can be specified directly in an instruction.

The size of directly addressable area depends on the length of the data being accessed as shown below.

Byte data access : 000<sub>H</sub> to 0FF<sub>H</sub>

Half word access : 000<sub>H</sub> to 1FF<sub>H</sub>


Word data access : 000<sub>H</sub> to 3FF<sub>H</sub>

# MB91460B Series

## ■ MEMORY MAPS

### 1. MB91F467BA, MB91F466BA


MB91F467BA

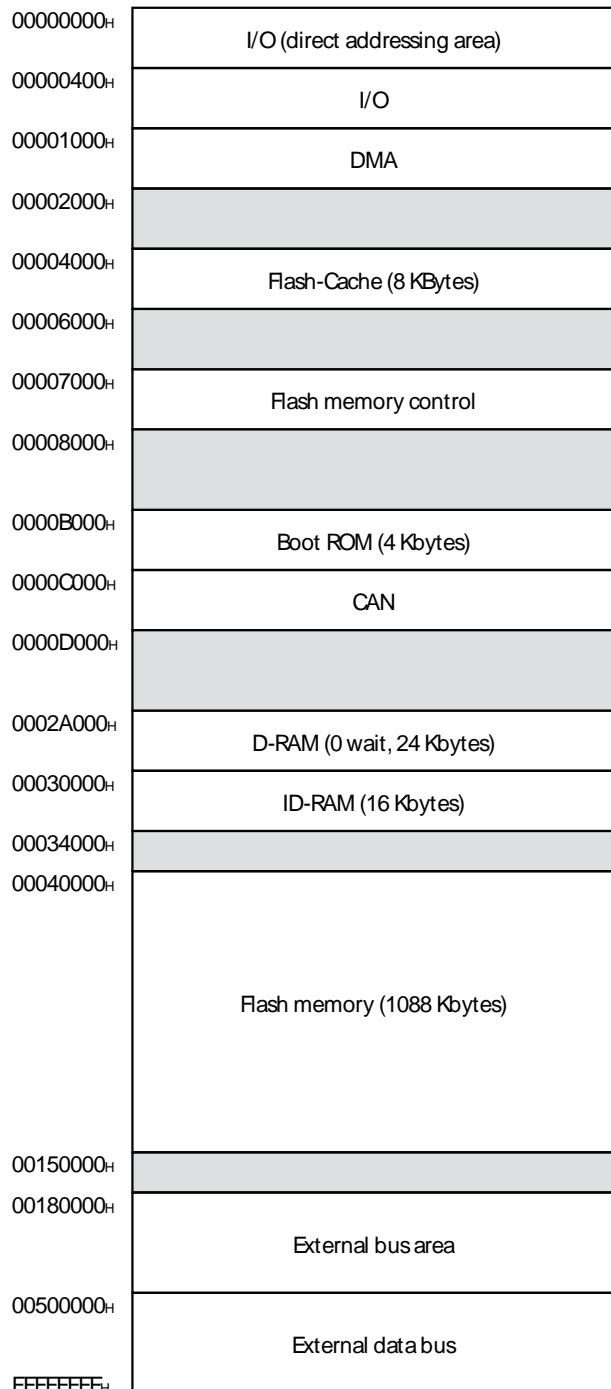

Note:

Access prohibited areas

MB91F466BA

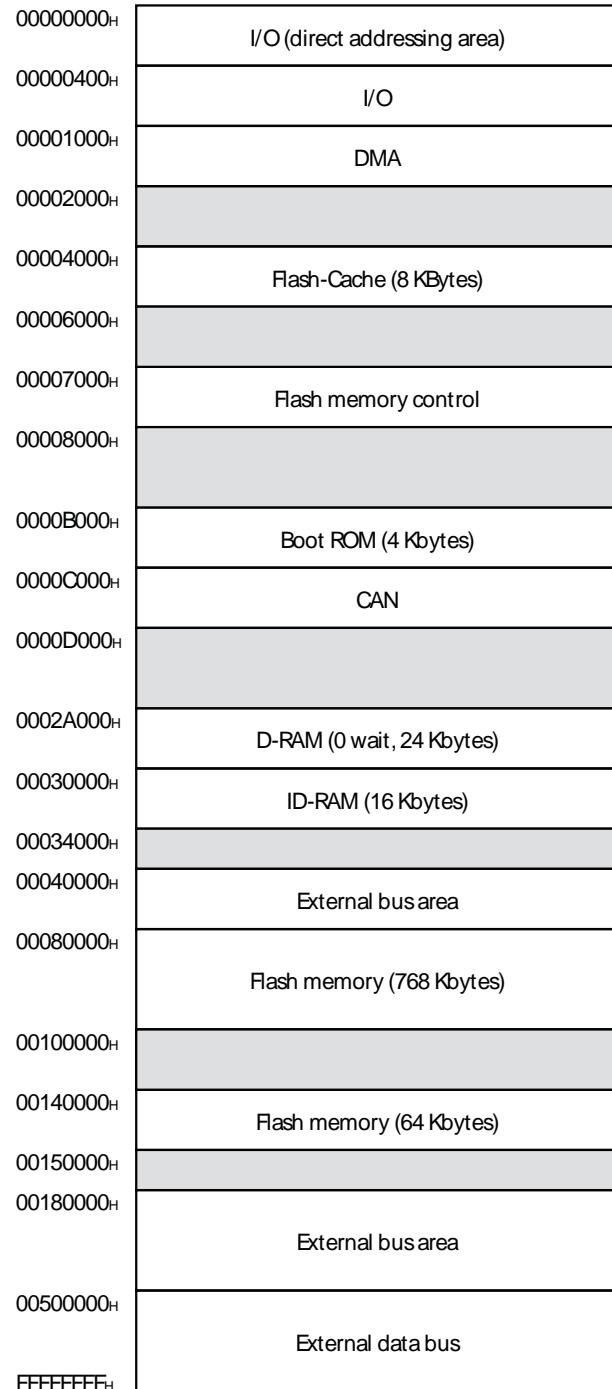


Note:


Access prohibited areas

## 2. MB91F465BB, MB91F464BB

MB91F465BB

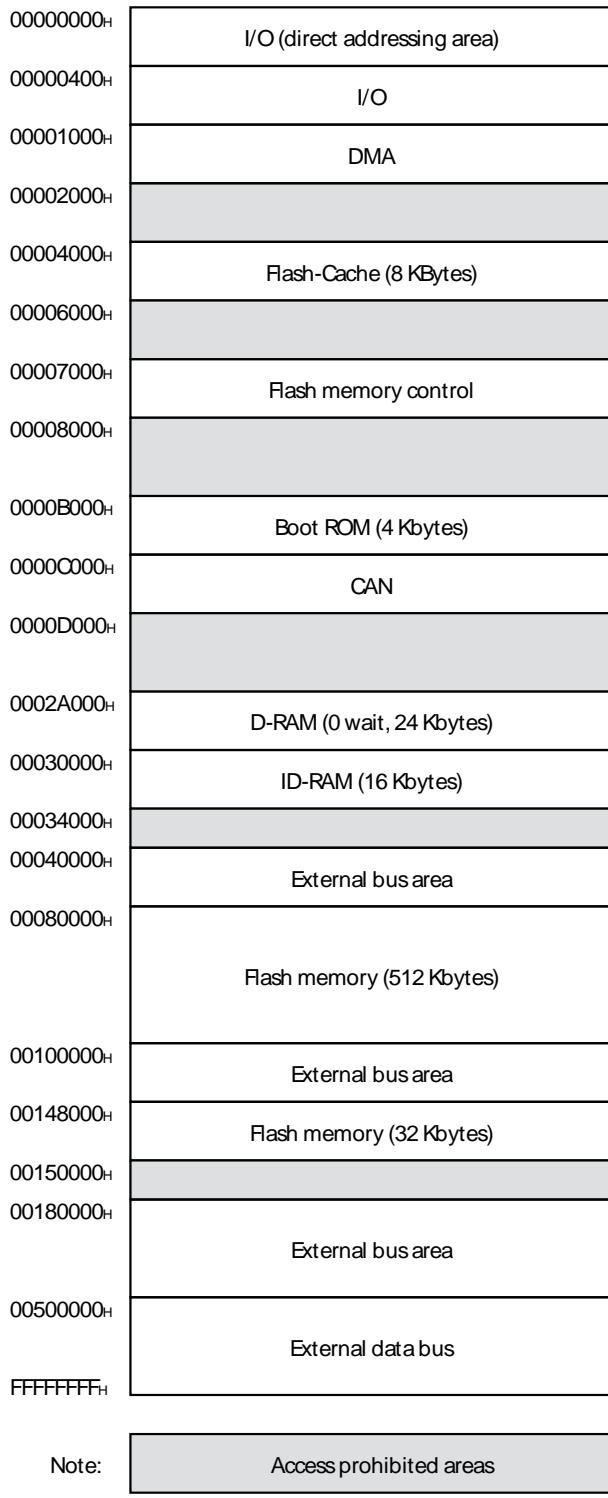

MB91F464BB

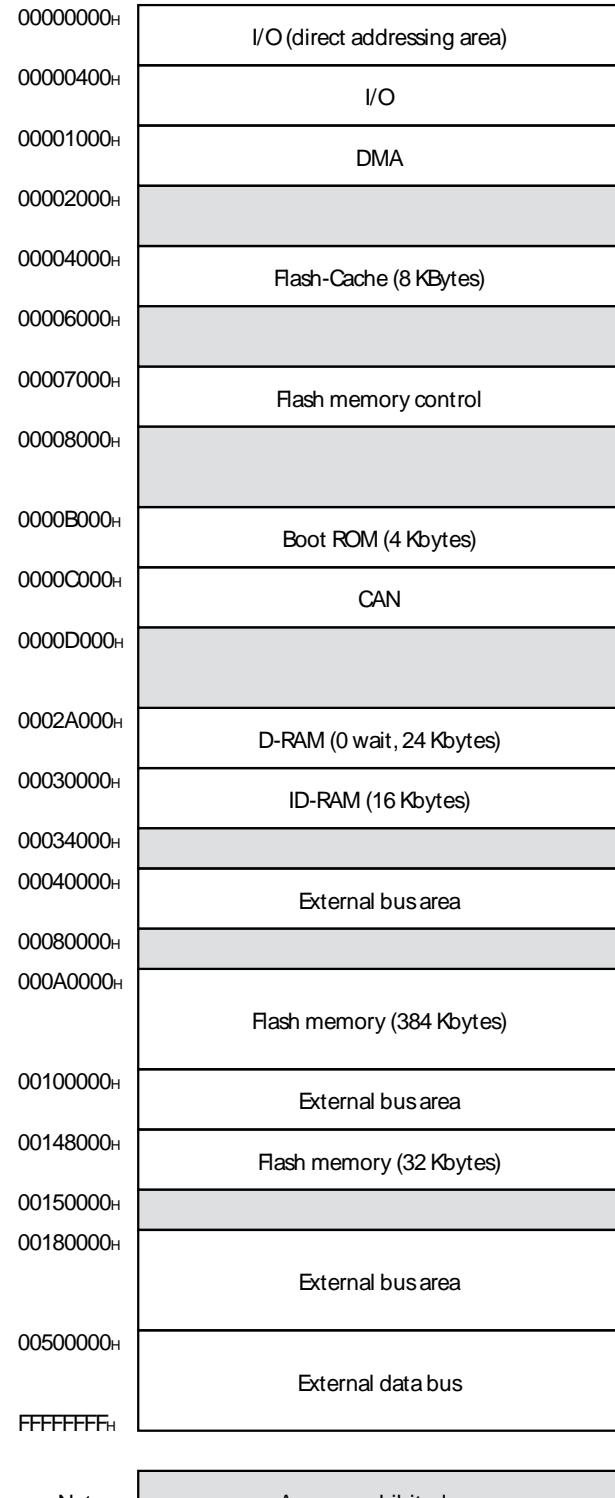

# MB91460B Series

## ■ I/O MAP

### 1. MB91F467BA/466BA, MB91F465BB/464BB

Address	Register				Block
	+ 0	+ 1	+ 2	+ 3	
000000H	PDR0 [R/W] XXXXXXX	PDR1 [R/W] XXXXXXX	PDR2 [R/W] XXXXXXX	PDR3 [R/W] XXXXXXX	T-unit port data register

Diagram notes:

- Address 000000H is shown above the first column.
- Arrows point from the address to the first column and from the first column to the registers.
- Registers are labeled PDR0, PDR1, PDR2, and PDR3.
- Attributes are shown in brackets: [R/W] for Read/Write and [X] for undefined.
- Initial values are shown as XXXXXX.
- Legend:
  - Read/write attribute: [R/W]
  - Register initial value after reset: XXXXXX
  - Register name (column 1 register at address 4n, column 2 register at address 4n + 1...): PDR0, PDR1, PDR2, PDR3
  - Leftmost register address (for word access, the register in column 1 becomes the MSB side of the data.): 000000H

Note : Initial values of register bits are represented as follows:

- “ 1 ” : Initial value “ 1 ”
- “ 0 ” : Initial value “ 0 ”
- “ X ” : Initial value “ undefined ”
- “ - ” : No physical register at this location

Access is barred with an undefined data access attribute.

# MB91460B Series

Address	Register				Block
	+0	+1	+2	+3	
000000H	PDR00 [R/W] XXXXXXXX	PDR01 [R/W] XXXXXXXX	Reserved	Reserved	R-bus Port Data Register
000004H	Reserved	PDR05 [R/W] -- XXXXXX	PDR06 [R/W] XXXXXXX	PDR07 [R/W] XXXXXXX	
000008H	PDR08 [R/W] X -- X --- X	PDR09 [R/W] ----- XX	PDR10 [R/W] ----- X	Reserved	
00000CH	Reserved	Reserved	PDR14 [R/W] XXXXXXX	PDR15 [R/W] XXXXXXX	
000010H	PDR16 [R/W] XXXXXXX	PDR17 [R/W] XXXXXXX	PDR18 [R/W] - XXX - XXX	PDR19 [R/W] - XXX - XXX	
000014H	PDR20 [R/W] - XXX - XXX	PDR21 [R/W] ----- XX	PDR22 [R/W] XXXXXXX	PDR23 [R/W] XXXXXXX	
000018H	PDR24 [R/W] XXXXXXX	Reserved	PDR26 [R/W] XXXXXXX	PDR27 [R/W] XXXXXXX	
00001CH	PDR28 [R/W] XXXXXXX	PDR29 [R/W] XXXXXXX	Reserved	Reserved	
000020H to 00002CH	Reserved				
000030H	EIRR0 [R/W] MB91F467BA: 00000000:MD3=0 11110000:MD3=1  MB91F465BB: XXXXXXX	ENIR0 [R/W] 00000000	ELVR0 [R/W] 00000000 00000000		External interrupt (INT 0 to INT 7)
000034H	EIRR1 [R/W] MB91F467BA: 00000000  MB91F465BB: XXXXXXX	ENIR1 [R/W] 00000000	ELVR1 [R/W] 00000000 00000000		External interrupt (INT 8 to INT 15)
000038H	DICR [R/W] ----- 0	HRCL [R/W] 0 -- 1111	RBSYNC		Delay interrupt
00003CH	Reserved				Reserved
000040H	SCR00 [R/W,W] 00000000	SMR00 [R/W,W] 00000000	SSR00 [R/W,R] 00001000	RDR00/TDR00 [R/W] 00000000	LIN-USART 0
000044H	ESCR00 [R/W] 00000X00	ECCR00 [R/W,R,W] -00000XX	Reserved		
000048H 00004CH	Reserved				Reserved

# MB91460B Series

Address	Register				Block
	+0	+1	+2	+3	
000050 <sub>H</sub>	SCR02 [R/W,W] 00000000	SMR02 [R/W,W] 00000000	SSR02 [R/W,R] 00001000	RDR02/TDR02 [R/W] 00000000	LIN-USART 2
000054 <sub>H</sub>	ESCR02 [R/W] 00000X00	ECCR02 [R/W,R,W] -00000XX	Reserved		
000058 <sub>H</sub>	SCR03 [R/W,W] 00000000	SMR03 [R/W,W] 00000000	SSR03 [R/W,R] 00001000	RDR03/TDR03 [R/W] 00000000	LIN-USART 3
00005C <sub>H</sub>	ESCR03 [R/W] 00000X00	ECCR03 [R/W,R,W] -00000XX	Reserved		
000060 <sub>H</sub>	SCR04 [R/W,W] 00000000	SMR04 [R/W,W] 00000000	SSR04 [R/W,R] 00001000	RDR04/TDR04 [R/W] 00000000	LIN-USART 4 with FIFO
000064 <sub>H</sub>	ESCR04 [R/W] 00000X00	ECCR04 [R/W,R,W] -00000XX	FSR04 [R] --- 00000	FCR04 [R/W] 0001 - 000	
000068 <sub>H</sub>	SCR05 [R/W,W] 00000000	SMR05 [R/W,W] 00000000	SSR05 [R/W,R] 00001000	RDR05/TDR05 [R/W] 00000000	LIN-USART 5 with FIFO
00006C <sub>H</sub>	ESCR05 [R/W] 00000X00	ECCR05 [R/W,R,W] -00000XX	FSR05 [R] --- 00000	FCR05 [R/W] 0001 - 000	
000070 <sub>H</sub>	SCR06 [R/W,W] 00000000	SMR06 [R/W,W] 00000000	SSR06 [R/W,R] 00001000	RDR06/TDR06 [R/W] 00000000	LIN-USART 6 with FIFO
000074 <sub>H</sub>	ESCR06 [R/W] 00000X00	ECCR06 [R/W,R,W] -00000XX	FSR06 [R] --- 00000	FCR06 [R/W] 0001 - 000	
000078 <sub>H</sub>	SCR07 [R/W,W] 00000000	SMR07 [R/W,W] 00000000	SSR07 [R/W,R] 00001000	RDR07/TDR07 [R/W] 00000000	LIN-USART 7 with FIFO
00007C <sub>H</sub>	ESCR07 [R/W] 00000X00	ECCR07 [R/W,R,W] -00000XX	FSR07 [R] --- 00000	FCR07 [R/W] 0001 - 000	
000080 <sub>H</sub>	BGR100 [R/W] 00000000	BGR000 [R/W] 00000000	Reserved		Baud rate Generator LIN-USART 0 to 7
000084 <sub>H</sub>	BGR102 [R/W] 00000000	BGR002 [R/W] 00000000	BGR103 [R/W] 00000000	BGR003 [R/W] 00000000	
000088 <sub>H</sub>	BGR104 [R/W] 00000000	BGR004 [R/W] 00000000	BGR105 [R/W] 00000000	BGR005 [R/W] 00000000	
00008C <sub>H</sub>	BGR106 [R/W] 00000000	BGR006 [R/W] 00000000	BGR107 [R/W] 00000000	BGR007 [R/W] 00000000	

# MB91460B Series

Address	Register				Block
	+0	+1	+2	+3	
000090 <sub>H</sub> to 0000CC <sub>H</sub>	Reserved				Reserved
0000D0 <sub>H</sub>	IBCR0 [R/W] 00000000	IBSR0 [R] 00000000	ITBAH0 [R/W] ----- 00	ITBAL0 [R/W] 00000000	I <sup>2</sup> C 0
0000D4 <sub>H</sub>	ITMKH0 [R/W] 00 ----- 11	ITMKL0 [R/W] 11111111	ISMK0 [R/W] 01111111	ISBA0 [R/W] - 00000000	
0000D8 <sub>H</sub>	Reserved	IDAR0 [R/W] 00000000	ICCR0 [R/W] - 00111111	Reserved	
0000DC <sub>H</sub>	IBCR1 [R/W] 00000000	IBSR1 [R] 00000000	ITBAH1 [R/W] ----- 00	ITBAL1 [R/W] 00000000	I <sup>2</sup> C 1
0000E0 <sub>H</sub>	ITMKH1 [R/W] 00 ----- 11	ITMKL1 [R/W] 11111111	ISMK1 [R/W] 01111111	ISBA1 [R/W] - 00000000	
0000E4 <sub>H</sub>	Reserved	IDAR1 [R/W] 00000000	ICCR1 [R/W] - 00111111	Reserved	
0000E8 <sub>H</sub> to 0000FC <sub>H</sub>	Reserved				Reserved
000100 <sub>H</sub>	GCN10 [R/W] 00110010 00010000	Reserved	GCN20 [R/W] ---- 0000	PPG Control 0 to 3	
000104 <sub>H</sub>	GCN11 [R/W] 00110010 00010000	Reserved	GCN21 [R/W] ---- 0000	PPG Control 4 to 7	
000108 <sub>H</sub>	GCN12 [R/W] 00110010 00010000	Reserved	GCN22 [R/W] ---- 0000	PPG Control 8 to 11	
000110 <sub>H</sub>	PTMR00 [R] 11111111 11111111	PCSR00 [W] XXXXXXXX XXXXXXXX			PPG 0
000114 <sub>H</sub>	PDUT00 [W] XXXXXXXX XXXXXXXX	PCNH00 [R/W] 0000000 -	PCNL00 [R/W] 000000 - 0		
000118 <sub>H</sub>	PTMR01 [R] 11111111 11111111	PCSR01 [W] XXXXXXXX XXXXXXXX			PPG 1
00011C <sub>H</sub>	PDUT01 [W] XXXXXXXX XXXXXXXX	PCNH01 [R/W] 0000000 -	PCNL01 [R/W] 000000 - 0		
000120 <sub>H</sub>	PTMR02 [R] 11111111 11111111	PCSR02 [W] XXXXXXXX XXXXXXXX			PPG 2
000124 <sub>H</sub>	PDUT02 [W] XXXXXXXX XXXXXXXX	PCNH02 [R/W] 0000000 -	PCNL02 [R/W] 000000 - 0		
000128 <sub>H</sub>	PTMR03 [R] 11111111 11111111	PCSR03 [W] XXXXXXXX XXXXXXXX			PPG 3
00012C <sub>H</sub>	PDUT03 [W] XXXXXXXX XXXXXXXX	PCNH03 [R/W] 0000000 -	PCNL03 [R/W] 000000 - 0		

# MB91460B Series

Address	Register				Block
	+0	+1	+2	+3	
000130 <sub>H</sub>	PTMR04 [R] 11111111 11111111		PCSR04 [W] XXXXXXXX XXXXXXXX		PPG 4
000134 <sub>H</sub>	PDUT04 [W] XXXXXXXX XXXXXXXX	PCNH04 [R/W] 0000000 -	PCNL04 [R/W] 0000000 - 0		
000138 <sub>H</sub>	PTMR05 [R] 11111111 11111111		PCSR05 [W] XXXXXXXX XXXXXXXX		PPG 5
00013C <sub>H</sub>	PDUT05 [W] XXXXXXXX XXXXXXXX	PCNH05 [R/W] 0000000 -	PCNL05 [R/W] 0000000 - 0		
000140 <sub>H</sub>	PTMR06 [R] 11111111 11111111		PCSR06 [W] XXXXXXXX XXXXXXXX		PPG 6
000144 <sub>H</sub>	PDUT06 [W] XXXXXXXX XXXXXXXX	PCNH06 [R/W] 0000000 -	PCNL06 [R/W] 0000000 - 0		
000148 <sub>H</sub>	PTMR07 [R] 11111111 11111111		PCSR07 [W] XXXXXXXX XXXXXXXX		PPG 7
00014C <sub>H</sub>	PDUT07 [W] XXXXXXXX XXXXXXXX	PCNH07 [R/W] 0000000 -	PCNL07 [R/W] 0000000 - 0		
000150 <sub>H</sub>	PTMR08 [R] 11111111 11111111		PCSR08 [W] XXXXXXXX XXXXXXXX		PPG 8
000154 <sub>H</sub>	PDUT08 [W] XXXXXXXX XXXXXXXX	PCNH08 [R/W] 0000000 -	PCNL08 [R/W] 0000000 - 0		
000158 <sub>H</sub>	PTMR09 [R] 11111111 11111111		PCSR09 [W] XXXXXXXX XXXXXXXX		PPG 9
00015C <sub>H</sub>	PDUT09 [W] XXXXXXXX XXXXXXXX	PCNH09 [R/W] 0000000 -	PCNL09 [R/W] 0000000 - 0		
000160 <sub>H</sub>	PTMR10 [R] 11111111 11111111		PCSR10 [W] XXXXXXXX XXXXXXXX		PPG 10
000164 <sub>H</sub>	PDUT10 [W] XXXXXXXX XXXXXXXX	PCNH10 [R/W] 0000000 -	PCNL10 [R/W] 0000000 - 0		
000168 <sub>H</sub>	PTMR11 [R] 11111111 11111111		PCSR11 [W] XXXXXXXX XXXXXXXX		PPG 11
00016C <sub>H</sub>	PDUT11 [W] XXXXXXXX XXXXXXXX	PCNH11 [R/W] 0000000 -	PCNL11 [R/W] 0000000 - 0		
000170 <sub>H</sub> to 00017C <sub>H</sub>	Reserved				Reserved
000180 <sub>H</sub>	Reserved	ICS01 [R/W] 00000000	Reserved	ICS23 [R/W] 00000000	Input Capture 0 to 3
000184 <sub>H</sub>	IPCP0 [R] XXXXXXXX XXXXXXXX		IPCP1 [R] XXXXXXXX XXXXXXXX		
000188 <sub>H</sub>	IPCP2 [R] XXXXXXXX XXXXXXXX		IPCP3 [R] XXXXXXXX XXXXXXXX		

# MB91460B Series

Address	Register				Block
	+0	+1	+2	+3	
00018C <sub>H</sub>	OCS01 [R/W] --- 0 -- 00 0000 -- 00		OCS23 [R/W] --- 0 -- 00 0000 -- 00		Output Compare 0 to 3
000190 <sub>H</sub>	OCCP0 [R/W] XXXXXXXX XXXXXXXX		OCCP1 [R/W] XXXXXXXX XXXXXXXX		
000194 <sub>H</sub>	OCCP2 [R/W] XXXXXXXX XXXXXXXX		OCCP3 [R/W] XXXXXXXX XXXXXXXX		
000198 <sub>H</sub>	SGCRH [R/W] 0000 -- 00	SGCRL [R/W] -- 0 -- 000	SGFR [R/W, R] XXXXXXXX XXXXXXXX		Sound Generator
00019C <sub>H</sub>	SGAR [R/W] 00000000	Reserved	SGTR [R/W] XXXXXXXX	SGDR [R/W] XXXXXXXX	
0001A0 <sub>H</sub>	ADERH [R/W] 00000000 00000000		ADERL [R/W] 00000000 00000000		A/D Converter
0001A4	ADCS1 [R/W] 00000000	ADCS0 [R/W] 00000000	ADCR1 [R] 000000XX	ADCR0 [R] XXXXXXXX	
0001A8 <sub>H</sub>	ADCT1 [R/W] 00010000	ADCT0 [R/W] 00101100	ADSCH [R/W] --- 00000	ADECH [R/W] --- 00000	
0001AC <sub>H</sub>	Reserved	ACSR0 [R/W] -1XXX00	Reserved	Reserved	Alarm Comparator 0 to 1
0001B0 <sub>H</sub>	TMRLR0 [W] XXXXXXXX XXXXXXXX		TMR0 [R] XXXXXXXX XXXXXXXX		Reload Timer 0 (PPG 0, PPG 1)
0001B4 <sub>H</sub>	Reserved		TMCSRHO [R/W] --- 00000	TMCSRL0 [R/W] 0 - 000000	
0001B8 <sub>H</sub>	TMRLR1 [W] XXXXXXXX XXXXXXXX		TMR1 [R] XXXXXXXX XXXXXXXX		Reload Timer 1 (PPG 2, PPG 3)
0001BC <sub>H</sub>	Reserved		TMCSRHI1 [R/W] --- 00000	TMCSRL1 [R/W] 0 - 000000	
0001C0 <sub>H</sub>	TMRLR2 [W] XXXXXXXX XXXXXXXX		TMR2 [R] XXXXXXXX XXXXXXXX		Reload Timer 2 (PPG 4, PPG 5)
0001C4 <sub>H</sub>	Reserved		TMCSRHI2 [R/W] --- 00000	TMCSRL2 [R/W] 0 - 000000	
0001C8 <sub>H</sub>	TMRLR3 [W] XXXXXXXX XXXXXXXX		TMR3 [R] XXXXXXXX XXXXXXXX		Reload Timer 3 (PPG 6, PPG 7)
0001CC <sub>H</sub>	Reserved		TMCSRHI3 [R/W] --- 00000	TMCSRL3 [R/W] 0 - 000000	
0001D0 <sub>H</sub>	TMRLR4 [W] XXXXXXXX XXXXXXXX		TMR4 [R] XXXXXXXX XXXXXXXX		Reload Timer 4 (PPG 8, PPG 9)
0001D4 <sub>H</sub>	Reserved		TMCSRHI4 [R/W] --- 00000	TMCSRL4 [R/W] 0 - 000000	

# MB91460B Series

Address	Register				Block	
	+0	+1	+2	+3		
0001D8 <sub>H</sub>	TMRLR5 [W] XXXXXXXX XXXXXXXX		TMR5 [R] XXXXXXXX XXXXXXXX		Reload Timer 5 (PPG 10, PPG 11)	
0001DC <sub>H</sub>	Reserved		TMCSRH5 [R/W] --- 00000	TMCSRL5 [R/W] 0 - 000000		
0001E0 <sub>H</sub>	TMRLR6 [W] XXXXXXXX XXXXXXXX		TMR6 [R] XXXXXXXX XXXXXXXX		Reload Timer 6 (PPG 12, PPG 13)	
0001E4 <sub>H</sub>	Reserved		TMCSRH6 [R/W] --- 00000	TMCSRL6 [R/W] 0 - 000000		
0001E8 <sub>H</sub>	TMRLR7 [W] XXXXXXXX XXXXXXXX		TMR7 [R] XXXXXXXX XXXXXXXX		Reload Timer 7 (PPG 14, PPG 15) (A/D Converter)	
0001EC <sub>H</sub>	Reserved		TMCSRH7 [R/W] --- 00000	TMCSRL7 [R/W] 0 - 000000		
0001F0 <sub>H</sub>	TCDT0 [R/W] XXXXXXXX XXXXXXXX		Reserved	TCCS0 [R/W] 00000000	Free Running Timer 0 (ICU 0, ICU 1)	
0001F4 <sub>H</sub>	TCDT1 [R/W] XXXXXXXX XXXXXXXX		Reserved	TCCS1 [R/W] 00000000	Free Running Timer 1 (ICU 2, ICU 3)	
0001F8 <sub>H</sub>	TCDT2 [R/W] XXXXXXXX XXXXXXXX		Reserved	TCCS2 [R/W] 00000000	Free Running Timer 2 (OCU 0, OCU 1)	
0001FC <sub>H</sub>	TCDT3 [R/W] XXXXXXXX XXXXXXXX		Reserved	TCCS3 [R/W] 00000000	Free Running Timer 3 (OCU 2, OCU 3)	
000200 <sub>H</sub>	DMACA0 [R/W] 00000000 0000XXXX XXXXXXXX XXXXXXXX				DMAC	
000204 <sub>H</sub>	DMACB0 [R/W] 00000000 00000000 XXXXXXXX XXXXXXXX					
000208 <sub>H</sub>	DMACA1 [R/W] 00000000 0000XXXX XXXXXXXX XXXXXXXX					
00020C <sub>H</sub>	DMACB1 [R/W] 00000000 00000000 XXXXXXXX XXXXXXXX					
000210 <sub>H</sub>	DMACA2 [R/W] 00000000 0000XXXX XXXXXXXX XXXXXXXX					
000214 <sub>H</sub>	DMACB2 [R/W] 00000000 00000000 XXXXXXXX XXXXXXXX					
000218 <sub>H</sub>	DMACA3 [R/W] 00000000 0000XXXX XXXXXXXX XXXXXXXX					
00021C <sub>H</sub>	DMACB3 [R/W] 00000000 00000000 XXXXXXXX XXXXXXXX					

# MB91460B Series

Address	Register				Block	
	+0	+1	+2	+3		
000220 <sub>H</sub>	DMACA4 [R/W] 00000000 0000XXXX XXXXXXXX XXXXXXXX				DMAC	
000224 <sub>H</sub>	DMACB4 [R/W] 00000000 00000000 XXXXXXXX XXXXXXXX					
000228 <sub>H</sub> to 00023C <sub>H</sub>	Reserved					
000240 <sub>H</sub>	DMACR [R/W] 00 - - 0000	Reserved				
000244 <sub>H</sub> to 0002CC <sub>H</sub>	Reserved				Reserved	
0002D0 <sub>H</sub>	Reserved	ICS045 [R/W] 00000000	Reserved	ICS67 [R/W] 00000000	Input Capture 4 to 7	
0002D4 <sub>H</sub>	IPCP4 [R] XXXXXXXX XXXXXXXX		IPCP5 [R] XXXXXXXX XXXXXXXX			
0002D8 <sub>H</sub>	IPCP6 [R] XXXXXXXX XXXXXXXX		IPCP7 [R] XXXXXXXX XXXXXXXX			
0002DC <sub>H</sub>	OCS45 [R/W] --- 0 - - 00 0000 - - 00		OCS67 [R/W] --- 0 - - 00 0000 - - 00			
0002E0 <sub>H</sub>	OCCP4 [R/W] XXXXXXXX XXXXXXXX		OCCP5 [R/W] XXXXXXXX XXXXXXXX		Output Compare 4 to 7	
0002E4 <sub>H</sub>	OCCP6 [R/W] XXXXXXXX XXXXXXXX		OCCP7 [R/W] XXXXXXXX XXXXXXXX			
0002E8 <sub>H</sub> to 0002EC <sub>H</sub>	Reserved					
0002F0 <sub>H</sub>	TCDT4 [R/W] XXXXXXXX XXXXXXXX		Reserved	TCCS4 [R/W] 00000000	Free Running Timer 4 (ICU 4, ICU 5)	
0002F4 <sub>H</sub>	TCDT5 [R/W] XXXXXXXX XXXXXXXX		Reserved	TCCS5 [R/W] 00000000	Free Running Timer 5 (ICU 6, ICU 7)	
0002F8 <sub>H</sub>	TCDT6 [R/W] XXXXXXXX XXXXXXXX		Reserved	TCCS6 [R/W] 00000000	Free Running Timer 6 (OCU 4, OCU 5)	
0002FC <sub>H</sub>	TCDT7 [R/W] XXXXXXXX XXXXXXXX		Reserved	TCCS7 [R/W] 00000000	Free Running Timer 7 (OCU 6, OCU 7)	

# MB91460B Series

Address	Register				Block
	+0	+1	+2	+3	
000300 <sub>H</sub>	UDRC1 [W] 00000000	UDRC0 [W] 00000000	UDCR1 [R] 00000000	UDCR0 [R] 00000000	Up/Down Counter 0 to 1
000304 <sub>H</sub>	UDCCH0 [R/W] 00000000	UDCCL0 [R/W] 00001000	Reserved	UDCS0 [R/W] 00000000	
000308 <sub>H</sub>	UDCCH1 [R/W] 00000000	UDCCL1 [R/W] 00001000	Reserved	UDCS1 [R/W] 00000000	
00030C <sub>H</sub> to 00031C <sub>H</sub>	Reserved				Reserved
000320 <sub>H</sub>	GCN13 [R/W] 00110010 00010000		Reserved	GCN23 [R/W] ---- 0000	PPG Control 12 to 15
000324 <sub>H</sub> to 00032C <sub>H</sub>	Reserved				Reserved
000330 <sub>H</sub>	PTMR12 [R] 11111111 11111111		PCSR12 [W] XXXXXXXX XXXXXXXX		PPG 12
000334 <sub>H</sub>	PDUT12 [W] XXXXXXXX XXXXXXXX		PCNH12 [R/W] 0000000 -	PCNL12 [R/W] 0000000 - 0	
000338 <sub>H</sub>	PTMR13 [R] 11111111 11111111		PCSR13 [W] XXXXXXXX XXXXXXXX		PPG 13
00033C <sub>H</sub>	PDUT13 [W] XXXXXXXX XXXXXXXX		PCNH13 [R/W] 0000000 -	PCNL13 [R/W] 0000000 - 0	
000340 <sub>H</sub>	PTMR14 [R] 11111111 11111111		PCSR14 [W] XXXXXXXX XXXXXXXX		PPG 14
000344 <sub>H</sub>	PDUT14 [W] XXXXXXXX XXXXXXXX		PCNH14 [R/W] 0000000 -	PCNL14 [R/W] 0000000 - 0	
000348 <sub>H</sub>	PTMR15 [R] 11111111 11111111		PCSR15 [W] XXXXXXXX XXXXXXXX		PPG 15
00034C <sub>H</sub>	PDUT15 [W] XXXXXXXX XXXXXXXX		PCNH15 [R/W] 0000000 -	PCNL15 [R/W] 0000000 - 0	
000350 <sub>H</sub> to 00038C <sub>H</sub>	Reserved				Reserved
000390 <sub>H</sub>	ROMS [R] 11111111 00000000 (MB91F467BA/ 466BA) 11111111 01000011 (MB91F465BB/ 464BB)		Reserved		ROM Select Register
000394 <sub>H</sub> to 0003EC <sub>H</sub>	Reserved				Reserved

# MB91460B Series

Address	Register				Block	
	+0	+1	+2	+3		
0003F0 <sub>H</sub>	BSD0 [W] XXXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX				Bit Search Module	
0003F4 <sub>H</sub>	BSD1 [R/W] XXXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX					
0003F8 <sub>H</sub>	BSDC [W] XXXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX					
0003FC <sub>H</sub>	BSRR [R] XXXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX					
000400 <sub>H</sub> to 00043C <sub>H</sub>	Reserved					
000440 <sub>H</sub>	ICR00 [R/W] ---11111	ICR01 [R/W] ---11111	ICR02 [R/W] ---11111	ICR03 [R/W] ---11111	Interrupt Controller	
000444 <sub>H</sub>	ICR04 [R/W] ---11111	ICR05 [R/W] ---11111	ICR06 [R/W] ---11111	ICR07 [R/W] ---11111		
000448 <sub>H</sub>	ICR08 [R/W] ---11111	ICR09 [R/W] ---11111	ICR10 [R/W] ---11111	ICR11 [R/W] ---11111		
00044C <sub>H</sub>	ICR12 [R/W] ---11111	ICR13 [R/W] ---11111	ICR14 [R/W] ---11111	ICR15 [R/W] ---11111		
000450 <sub>H</sub>	ICR16 [R/W] ---11111	ICR17 [R/W] ---11111	ICR18 [R/W] ---11111	ICR19 [R/W] ---11111		
000454 <sub>H</sub>	ICR20 [R/W] ---11111	ICR21 [R/W] ---11111	ICR22 [R/W] ---11111	ICR23 [R/W] ---11111		
000458 <sub>H</sub>	ICR24 [R/W] ---11111	ICR25 [R/W] ---11111	ICR26 [R/W] ---11111	ICR27 [R/W] ---11111		
00045C <sub>H</sub>	ICR28 [R/W] ---11111	ICR29 [R/W] ---11111	ICR30 [R/W] ---11111	ICR31 [R/W] ---11111		
000460 <sub>H</sub>	ICR32 [R/W] ---11111	ICR33 [R/W] ---11111	ICR34 [R/W] ---11111	ICR35 [R/W] ---11111		
000464 <sub>H</sub>	ICR36 [R/W] ---11111	ICR37 [R/W] ---11111	ICR38 [R/W] ---11111	ICR39 [R/W] ---11111		
000468 <sub>H</sub>	ICR40 [R/W] ---11111	ICR41 [R/W] ---11111	ICR42 [R/W] ---11111	ICR43 [R/W] ---11111		
00046C <sub>H</sub>	ICR44 [R/W] ---11111	ICR45 [R/W] ---11111	ICR46 [R/W] ---11111	ICR47 [R/W] ---11111		
000470 <sub>H</sub>	ICR48 [R/W] ---11111	ICR49 [R/W] ---11111	ICR50 [R/W] ---11111	ICR51 [R/W] ---11111		
000474 <sub>H</sub>	ICR52 [R/W] ---11111	ICR53 [R/W] ---11111	ICR54 [R/W] ---11111	ICR55 [R/W] ---11111		
000478 <sub>H</sub>	ICR56 [R/W] ---11111	ICR57 [R/W] ---11111	ICR58 [R/W] ---11111	ICR59 [R/W] ---11111		

# MB91460B Series

Address	Register				Block	
	+0	+1	+2	+3		
00047C <sub>H</sub>	ICR60 [R/W] ---11111	ICR61 [R/W] ---11111	ICR62 [R/W] ---11111	ICR63 [R/W] ---11111	Interrupt Controller	
000480 <sub>H</sub>	RSRR [R/W] 10000000	STCR [R/W] 00110011	TBCR [R/W] 00XXXXX00	CTBR [W] XXXXXXXX	Clock Control	
000484 <sub>H</sub>	CLKR [R/W] ----0000	WPR [W] XXXXXXXX	DIVR0 [R/W] 00000011	DIVR1 [R/W] 00000000		
000488 <sub>H</sub>	Reserved				Reserved	
00048C <sub>H</sub>	PLLDIVM [R/W] ----0000	PLLDIVN [R/W] --000000	PLLDIVG [R/W] ----0000	PLLMULG [R/W] 00000000	PLL Interface	
000490 <sub>H</sub>	PLLCTRL [R/W] ----0000	Reserved				
000494 <sub>H</sub>	OSCC1 [R/W] ----010	OSCS1 [R/W] 00001111	OSCC2 [R/W] ----010	OSCS2 [R/W] 00001111	Main/Sub Oscillator Control (Reserved)	
000498 <sub>H</sub>	PORTEN [R/W] -----00	Reserved			Port Input Enable Control	
0004A0 <sub>H</sub>	Reserved	WTCSR [R/W] -----00	WTCR [R/W] 00000000 000-00-0		Real Time Clock (Watch Timer)	
0004A4 <sub>H</sub>	Reserved	WTBR [R/W] ---XXXXX XXXXXXXX XXXXXXXX				
0004A8 <sub>H</sub>	WTMR [R/W] ---00000	WTMR [R/W] --000000	WTSR [R/W] --000000	Reserved		
0004AC <sub>H</sub>	CSVTR [R/W] ---00010	CSVCR [R/W] -011100	CSCFG [R/W] 0X000000	CMCFG [R/W] 00000000	Clock- Supervisor/Selector/ Monitor	
0004B0 <sub>H</sub>	CUCR [R/W] -----0--00		CUTD [R/W] 10000000 00000000		Calibration of Sub Clock	
0004B4 <sub>H</sub>	CUTR1 [R] -----00000000		CUTR2 [R] 00000000 00000000			
0004B8 <sub>H</sub>	CMPR [R/W] --000010 11111101		Reserved	CMCR [R/W] -001--00	Clock Modulator	
0004BC <sub>H</sub>	CMT1 [R/W] 00000000 1---0000		CMT2 [R/W] --000000 -000000			
0004C0 <sub>H</sub>	CANPRE [R/W] 0---0000	CANCKD [R/W] --000000	Reserved		CAN Clock Control	
0004C4 <sub>H</sub>	LVSEL [R/W] 00000111	LVDET [R/W] 00000-00	HWWDE [R/W] -----00	HWWD [R/W,W] 00011000	Low Voltage Detection/ Hardware Watchdog	
0004C8 <sub>H</sub>	OSCRH [R/W] 000--001	OSCRL [R/W] ----000	WPCRH [R/W] 000--001	WPCRL [R/W] -----00	Main-/Sub-Oscilla- tion Stabilisation Timer	

# MB91460B Series

Address	Register				Block	
	+0	+1	+2	+3		
0004CC <sub>H</sub>	OSCCR [R/W] ----- 00	Reserved	REGSEL [R/W] -- 000110	REGCTR [R/W] --- 0 - - 00	Main- Oscillation Standby Control / Main/Sub Regulator Control	
0004D0 <sub>H</sub> to 00063C <sub>H</sub>	Reserved				Reserved	
000640 <sub>H</sub>	ASR0 [R/W] 00000000 00000000	ACR0 [R/W] 1111**00 00000000 <sup>2</sup>			External Bus Unit	
000644 <sub>H</sub>	ASR1 [R/W] XXXXXXXX XXXXXXXX	ACR1 [R/W] XXXXXXXX XXXXXXXX				
000648 <sub>H</sub>	ASR2 [R/W] XXXXXXXX XXXXXXXX	ACR2 [R/W] XXXXXXXX XXXXXXXX				
00064C <sub>H</sub>	ASR3 [R/W] XXXXXXXX XXXXXXXX	ACR3 [R/W] XXXXXXXX XXXXXXXX				
000650 <sub>H</sub>	ASR4 [R/W] XXXXXXXX XXXXXXXX	ACR4 [R/W] XXXXXXXX XXXXXXXX				
000654 <sub>H</sub>	ASR5 [R/W] XXXXXXXX XXXXXXXX	ACR5 [R/W] XXXXXXXX XXXXXXXX				
000658 <sub>H</sub>	ASR6 [R/W] XXXXXXXX XXXXXXXX	ACR6 [R/W] XXXXXXXX XXXXXXXX				
00065C <sub>H</sub>	ASR7 [R/W] XXXXXXXX XXXXXXXX	ACR7 [R/W] XXXXXXXX XXXXXXXX				
000660 <sub>H</sub>	AWR0 [R/W] 01111111 11111*11	AWR1 [R/W] XXXXXXXX XXXXXXXX				
000664 <sub>H</sub>	AWR2 [R/W] XXXXXXXX XXXXXXXX	AWR3 [R/W] XXXXXXXX XXXXXXXX				
000668 <sub>H</sub>	AWR4 [R/W] XXXXXXXX XXXXXXXX	AWR5 [R/W] XXXXXXXX XXXXXXXX				
00066C <sub>H</sub>	AWR6 [R/W] XXXXXXXX XXXXXXXX	AWR7 [R/W] XXXXXXXX XXXXXXXX				
000670 <sub>H</sub>	MCRA [R/W] XXXXXXXX	MCRB [R/W] XXXXXXXX	Reserved			
000674 <sub>H</sub>	Reserved					
000678 <sub>H</sub>	IOWR0 [R/W] XXXXXXXX	IOWR1 [R/W] XXXXXXXX	IOWR2 [R/W] XXXXXXXX	IOWR3 [R/W] XXXXXXXX		
00067C <sub>H</sub>	Reserved					
000680 <sub>H</sub>	CSER [R/W] 00000001	CHER [R/W] 11111111	Reserved	TCR [R/W] 0000**** * <sup>3</sup>		
000684 <sub>H</sub>	RCRH [R/W] 00XXXXXX	RCRL [R/W] XXXX0XXX	Reserved			

# MB91460B Series

Address	Register				Block
	+0	+1	+2	+3	
000688 <sub>H</sub> to 0007F8 <sub>H</sub>	Reserved				External Bus Unit
0007FC <sub>H</sub>	Reserved	MODR [W] XXXXXXXX	Reserved		Mode Register
000800 <sub>H</sub> to 000CFC <sub>H</sub>	Reserved				Reserved
000D00 <sub>H</sub>	PDRD00 [R] XXXXXXXX	PDRD01 [R] XXXXXXXX	Reserved		R-bus Port Data Direct Read Register
000D04 <sub>H</sub>	Reserved	PDRD05 [R] -- XXXXXX	PDRD06 [R] XXXXXXXX	PDRD07 [R] XXXXXXXX	
000D08 <sub>H</sub>	PDRD08 [R] X -- X --- X	PDRD09 [R] ----- XX	PDRD10 [R] ----- X	Reserved	
000D0C <sub>H</sub>	Reserved		PDRD14 [R] XXXXXXXX	PDRD15 [R] XXXXXXXX	
000D10 <sub>H</sub>	PDRD16 [R] XXXXXXXX	PDRD17 [R] XXXXXXXX	PDRD18 [R] - XXX - XXX	PDRD19 [R] - XXX - XXX	
000D14 <sub>H</sub>	PDRD20 [R] - XXX - XXX	PDRD21 [R] ----- X	PDRD22 [R] XXXXXXXX	PDRD23 [R] XXXXXXXX	
000D18 <sub>H</sub>	PDRD24 [R] XXXXXXXX	Reserved	PDRD26 [R] XXXXXXXX	PDRD27 [R] XXXXXXXX	
000D1C <sub>H</sub>	PDRD28 [R] XXXXXXXX	PDRD29 [R] XXXXXXXX	Reserved		
000D20 <sub>H</sub> to 000D3C <sub>H</sub>	Reserved				
000D40 <sub>H</sub>	DDR00 [R/W] 00000000	DDR01 [R/W] 00000000	Reserved		R-bus Port Direction Register
000D44 <sub>H</sub>	Reserved	DDR05 [R/W] -- 000000	DDR06 [R/W] 00000000	DDR07 [R/W] 00000000	
000D48 <sub>H</sub>	DDR08 [R/W] 0 -- 0 --- 0	DDR09 [R/W] ----- 00	DDR10 [R/W] ----- 0	Reserved	
000D4C <sub>H</sub>	Reserved		DDR14 [R/W] 00000000	DDR15 [R/W] 00000000	
000D50 <sub>H</sub>	DDR16 [R/W] 00000000	DDR17 [R/W] 00000000	DDR18 [R/W] - 000 - 000	DDR19 [R/W] - 000 - 000	
000D54 <sub>H</sub>	DDR20 [R/W] - 000 - 000	DDR21 [R/W] ----- 00	DDR22 [R/W] 00000000	DDR23 [R/W] 00000000	
000D58 <sub>H</sub>	DDR24 [R/W] 00000000	Reserved	DDR26 [R/W] 00000000	DDR27 [R/W] 00000000	
000D5C <sub>H</sub>	DDR28 [R/W] 00000000	DDR29 [R/W] 00000000	Reserved		

# MB91460B Series

Address	Register				Block	
	+0	+1	+2	+3		
000D60 <sub>H</sub> to 000D7C <sub>H</sub>	Reserved				Reserved	
000D80 <sub>H</sub>	PFR00 [R/W] 11111111	PFR01 [R/W] 11111111	Reserved		R-bus Port Function Register	
000D84 <sub>H</sub>	Reserved	PFR05 [R/W] -- 111111	PFR06 [R/W] 11111111	PFR07 [R/W] 11111111		
000D88 <sub>H</sub>	PFR08 [R/W] 1 -- 1 -- 11	PFR09 [R/W] ----- 11	PFR10 [R/W] ----- 1	Reserved		
000D8C <sub>H</sub>	Reserved		PFR14 [R/W] 00000000	PFR15 [R/W] 00000000		
000D90 <sub>H</sub>	PFR16 [R/W] 00000000	PFR17 [R/W] 00000000	PFR18 [R/W] - 000 - 000	PFR19 [R/W] - 000 - 000		
000D94 <sub>H</sub>	PFR20 [R/W] - 000 - 000	PFR21 [R/W] ----- 00	PFR22 [R/W] 0000-0-0	PFR23 [R/W] -0000000		
000D98 <sub>H</sub>	PFR24 [R/W] 00000000	Reserved	PFR26 [R/W] 00000000	PFR27 [R/W] 00000000		
000D9C <sub>H</sub>	PFR28 [R/W] 00000000	PFR29 [R/W] 00000000	Reserved			
000DA0 <sub>H</sub> to 000DC4 <sub>H</sub>	Reserved					
000DC8 <sub>H</sub>	Reserved		EPFR10 [R/W] ----- 0	Reserved	R-bus Port Extra Function Register	
000DCC <sub>H</sub>	Reserved		EPFR14 [R/W] 00000000	EPFR15 [R/W] 00000000		
000DD0 <sub>H</sub>	EPFR16 [R/W] 0 - 00 -----	Reserved	EPFR18 [R/W] - 000 - 000	EPFR19 [R/W] - 0 -- 0 --		
000DD4 <sub>H</sub>	EPFR20 [R/W] - 000 - 000	EPFR21 [R/W] -----	Reserved			
000DD8 <sub>H</sub>	Reserved		EPFR26 [R/W] 00000000	EPFR27 [R/W] 00000000		
000DDC <sub>H</sub> to 000DFC <sub>H</sub>	Reserved				Reserved	

# MB91460B Series

Address	Register				Block
	+0	+1	+2	+3	
000E00 <sub>H</sub>	PODR00 [R/W] 00000000	PODR01 [R/W] 00000000	Reserved		R-bus Port Output Drive Select Register
000E04 <sub>H</sub>	Reserved	PODR05 [R/W] - - 000000	PODR06 [R/W] 00000000	PODR07 [R/W] 00000000	
000E08 <sub>H</sub>	PODR08 [R/W] 0 - - 0 - - 0	PODR09 [R/W] ----- 00	PODR10 [R/W] ----- 0	Reserved	
000E0C <sub>H</sub>	Reserved		PODR14 [R/W] 00000000	PODR15 [R/W] 00000000	
000E10 <sub>H</sub>	PODR16 [R/W] 00000000	PODR17 [R/W] 00000000	PODR18 [R/W] - 000 - 000	PODR19 [R/W] - 000 - 000	
000E14 <sub>H</sub>	PODR20 [R/W] - 000 - 000	PODR21 [R/W] ----- 00	PODR22 [R/W] 00000000	PODR23 [R/W] 00000000	
000E18 <sub>H</sub>	PODR24 [R/W] 00000000	Reserved	PODR26 [R/W] 00000000	PODR27 [R/W] 00000000	
000E1C <sub>H</sub>	PODR28 [R/W] 00000000	PODR29 [R/W] 00000000	Reserved		
000E20 <sub>H</sub> to 000E3C <sub>H</sub>	Reserved				Reserved
000E40 <sub>H</sub>	PILR00 [R/W] 00000000	PILR01 [R/W] 00000000	Reserved		R-bus Port Input Level Select Register
000E44 <sub>H</sub>	Reserved	PILR05 [R/W] - - 000000	PILR06 [R/W] 00000000	PILR07 [R/W] 00000000	
000E48 <sub>H</sub>	PILR08 [R/W] 0 - - 0 - - 0	PILR09 [R/W] ----- 00	PILR10 [R/W] ----- 0	Reserved	
000E4C <sub>H</sub>	Reserved		PILR14 [R/W] 00000000	PILR15 [R/W] 00000000	
000E50 <sub>H</sub>	PILR16 [R/W] 00000000	PILR17 [R/W] 00000000	PILR18 [R/W] ----- 000	PILR19 [R/W] - 000 - 000	
000E54 <sub>H</sub>	PILR20 [R/W] - 000 - 000	PILR21 [R/W] ----- 00	PILR22 [R/W] 00000000	PILR23 [R/W] 00000000	
000E58 <sub>H</sub>	PILR24 [R/W] 00000000	Reserved	PILR26 [R/W] 00000000	PILR27 [R/W] 00000000	
000E5C <sub>H</sub>	PILR28 [R/W] 00000000	PILR29 [R/W] 00000000	Reserved		
000E60 <sub>H</sub> to 000E7C <sub>H</sub>	Reserved				Reserved

# MB91460B Series

Address	Register				Block
	+0	+1	+2	+3	
000E80 <sub>H</sub>	EPILR00 [R/W] 00000000	EPILR01 [R/W] 00000000	Reserved		R-bus Port Extra Input Level Select Register
000E84 <sub>H</sub>	Reserved	EPILR05 [R/W] - - 000000	EPILR06 [R/W] 00000000	EPILR07 [R/W] 00000000	
000E88 <sub>H</sub>	EPILR08 [R/W] 0 - - 0 - - 0	EPILR09 [R/W] ----- 00	EPILR10 [R/W] ----- 0	Reserved	
000E8C <sub>H</sub>	Reserved		EPILR14 [R/W] 00000000	EPILR15 [R/W] 00000000	
000E90 <sub>H</sub>	EPILR16 [R/W] 00000000	EPILR17 [R/W] 00000000	EPILR18 [R/W] ----- 00	EPILR19 [R/W] - 000 - 000	
000E94 <sub>H</sub>	EPILR20 [R/W] - 000 - 000	EPILR21 [R/W] ----- 00	EPILR22 [R/W] 00000000	EPILR23 [R/W] 00000000	
000E98 <sub>H</sub>	EPILR24 [R/W] 00000000	Reserved	EPILR26 [R/W] 00000000	EPILR27 [R/W] 00000000	
000E9C <sub>H</sub>	EPILR28 [R/W] 00000000	EPILR29 [R/W] 00000000	Reserved		
000EA0 <sub>H</sub> to 000EBC <sub>H</sub>	Reserved				Reserved
000EC0 <sub>H</sub>	PPER00 [R/W] 00000000	PPER01 [R/W] 00000000	Reserved		R-bus Port Pull-Up/Down Enable Register
000EC4 <sub>H</sub>	Reserved	PPER05 [R/W] - - 000000	PPER06 [R/W] 00000000	PPER07 [R/W] 00000000	
000EC8 <sub>H</sub>	PPER08 [R/W] 0 - - 0 - - 0	PPER09 [R/W] ----- 00	PPER10 [R/W] ----- 0	Reserved	
000ECC <sub>H</sub>	Reserved		PPER14 [R/W] 00000000	PPER15 [R/W] 00000000	
000ED0 <sub>H</sub>	PPER16 [R/W] 00000000	PPER17 [R/W] 00000000	PPER18 [R/W] - 000 - 000	PPER19 [R/W] - 000 - 000	
000ED4 <sub>H</sub>	PPER20 [R/W] - 000 - 000	PPER21 [R/W] ----- 00	PPER22 [R/W] 00000000	PPER23 [R/W] 00000000	
000ED8 <sub>H</sub>	PPER24 [R/W] 00000000	Reserved	PPER26 [R/W] 00000000	PPER27 [R/W] 00000000	
000EDC <sub>H</sub>	PPER28 [R/W] 00000000	PPER29 [R/W] 00000000	Reserved		
000EE0 <sub>H</sub> to 000EFC <sub>H</sub>	Reserved				Reserved

# MB91460B Series

Address	Register				Block	
	+0	+1	+2	+3		
000F00 <sub>H</sub>	PPCR00 [R/W] 11111111	PPCR01 [R/W] 11111111	Reserved		R-bus Port Pull-Up/Down Con- trol Register	
000F04 <sub>H</sub>	Reserved	PPCR05 [R/W] --111111	PPCR06 [R/W] 11111111	PPCR07 [R/W] 11111111		
000F08 <sub>H</sub>	PPCR08 [R/W] 1--1---1	PPCR09 [R/W] -----11	PPCR10 [R/W] -----1	PPCR11 [R/W] -----1		
000F0C <sub>H</sub>	Reserved		PPCR14 [R/W] 00000000	PPCR15 [R/W] 11111111		
000F10 <sub>H</sub>	PPCR16 [R/W] 00000000	PPCR17 [R/W] 00000000	PPCR18 [R/W] -111-111	PPCR19 [R/W] -111-111		
000F14 <sub>H</sub>	PPCR20 [R/W] -111-111	PPCR21 [R/W] -----11	PPCR22 [R/W] 11111111	PPCR23 [R/W] 11111111		
000F18 <sub>H</sub>	PPCR24 [R/W] 11111111	Reserved	PPCR26 [R/W] 11111111	PPCR27 [R/W] 11111111		
000F1C <sub>H</sub>	PPCR28 [R/W] 11111111	PPCR29 [R/W] 11111111	Reserved			
000F20 <sub>H</sub> to 000F3C <sub>H</sub>	Reserved				Reserved	
001000 <sub>H</sub>	DMASA0 [R/W] XXXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX				DMAC	
001004 <sub>H</sub>	DMADA0 [R/W] XXXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX					
001008 <sub>H</sub>	DMASA1 [R/W] XXXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX					
00100C <sub>H</sub>	DMADA1 [R/W] XXXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX					
001010 <sub>H</sub>	DMASA2 [R/W] XXXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX					
001014 <sub>H</sub>	DMADA2 [R/W] XXXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX					
001018 <sub>H</sub>	DMASA3 [R/W] XXXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX					
00101C <sub>H</sub>	DMADA3 [R/W] XXXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX					
001020 <sub>H</sub>	DMASA4 [R/W] XXXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX					
001024 <sub>H</sub>	DMADA4 [R/W] XXXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX					
001028 <sub>H</sub> to 003FFC <sub>H</sub>	Reserved				Reserved	

# MB91460B Series

Address	Register				Block	
	+0	+1	+2	+3		
002000 <sub>H</sub> to 006FFC <sub>H</sub>	Flash-cache size is 8 Kbytes : 004000 <sub>H</sub> to 005FFC <sub>H</sub>				Flash-cache / I-RAM area	
007000 <sub>H</sub>	FMCS [R/W] 01101000	FMCR [R/W] ----- 0000	FCHCR [R/W] ----- 00 10000011		Flash Memory/ I-Cache Control Register	
007004 <sub>H</sub>	FMWT [R/W] 11111111 11111111		Reserved	FMPS [R/W] ----- 000		
007008 <sub>H</sub>	FMAC [R] 00000000 00000000 00000000 00000000					
00700C <sub>H</sub>	FCHA0 [R/W] ----- 000000 00000000 00000000				I-Cache Non-cacheable area setting Register	
007010 <sub>H</sub>	FCHA1 [R/W] ----- 000000 00000000 00000000					
007014 <sub>H</sub> to 007FFC <sub>H</sub>	Reserved				Reserved	
008000 <sub>H</sub> to 00BFFC <sub>H</sub>	Boot-ROM size is 4 Kbytes : 00B000 <sub>H</sub> to 00BFFC <sub>H</sub> (instruction access is 1 wait cycle, data access is 1 wait cycle)				Boot ROM area	
00C000 <sub>H</sub>	CTRLR0 [R/W] 00000000 00000001		STATR0 [R/W] 00000000 00000000		CAN 0 Control Register	
00C004 <sub>H</sub>	ERRCNT0 [R] 00000000 00000000		BTR0 [R/W] 00100011 00000001			
00C008 <sub>H</sub>	INTR0 [R] 00000000 00000000		TESTR0 [R/W] 00000000 X0000000			
00C00C <sub>H</sub>	BRPE0 [R/W] 00000000 00000000		CBSYNC0			

# MB91460B Series

Address	Register				Block	
	+0	+1	+2	+3		
00C010 <sub>H</sub>	IF1CREQ0 [R/W] 00000000 00000001		IF1CMSK0 [R/W] 00000000 00000000		CAN 0 IF 1 Register	
00C014 <sub>H</sub>	IF1MSK20 [R/W] 11111111 11111111		IF1MSK10 [R/W] 11111111 11111111			
00C018 <sub>H</sub>	IF1ARB20 [R/W] 00000000 00000000		IF1ARB10 [R/W] 00000000 00000000			
00C01C <sub>H</sub>	IF1MCTR0 [R/W] 00000000 00000000		Reserved			
00C020 <sub>H</sub>	IF1DTA10 [R/W] 00000000 00000000		IF1DTA20 [R/W] 00000000 00000000			
00C024 <sub>H</sub>	IF1DTB10 [R/W] 00000000 00000000		IF1DTB20 [R/W] 00000000 00000000			
00C028 <sub>H</sub> to 00C02C <sub>H</sub>	Reserved					
00C030 <sub>H</sub>	IF1DTA20 [R/W] 00000000 00000000		IF1DTA10 [R/W] 00000000 00000000			
00C034 <sub>H</sub>	IF1DTB20 [R/W] 00000000 00000000		IF1DTB10 [R/W] 00000000 00000000			
00C038 <sub>H</sub> to 00C03C <sub>H</sub>	Reserved					
00C040 <sub>H</sub>	IF2CREQ0 [R/W] 00000000 00000001		IF2CMSK0 [R/W] 00000000 00000000		CAN 0 IF 2 Register	
00C044 <sub>H</sub>	IF2MSK20 [R/W] 11111111 11111111		IF2MSK10 [R/W] 11111111 11111111			
00C048 <sub>H</sub>	IF2ARB20 [R/W] 00000000 00000000		IF2ARB10 [R/W] 00000000 00000000			

# MB91460B Series

Address	Register				Block
	+0	+1	+2	+3	
00C04CH	IF2MCTR0 [R/W] 00000000 00000000		Reserved		CAN 0 Status Flags
00C050H	IF2DTA10 [R/W] 00000000 00000000		IF2DTA20 [R/W] 00000000 00000000		
00C054H	IF2DTB10 [R/W] 00000000 00000000		IF2DTB20 [R/W] 00000000 00000000		
00C058H to 00C05CH		Reserved			
00C060H	IF2DTA20 [R/W] 00000000 00000000		IF2DTA10 [R/W] 00000000 00000000		
00C064H	IF2DTB20 [R/W] 00000000 00000000		IF2DTB10 [R/W] 00000000 00000000		
00C068H to 00C07CH		Reserved			
00C080H	TREQR20 [R] 00000000 00000000		TREQR10 [R] 00000000 00000000		
00C084H to 00C08CH	Reserved		Reserved		
00C090H	NEWDT20 [R] 00000000 00000000		NEWDT10 [R] 00000000 00000000		
00C094H to 00C09CH	Reserved		Reserved		
00C0A0H	INTPND20 [R] 00000000 00000000		INTPND10 [R] 00000000 00000000		
00C0A4H to 00C0ACH	Reserved		Reserved		
00C0B0H	MSGVAL20 [R] 00000000 00000000		MSGVAL10 [R] 00000000 00000000		
00C0B4H to 00C0FCH	Reserved		Reserved		

# MB91460B Series

Address	Register				Block
	+0	+1	+2	+3	
00C100 <sub>H</sub>	CTRLR1 [R/W] 00000000 00000001		STATR1 [R/W] 00000000 00000000		CAN 1 Control Register
00C104 <sub>H</sub>	ERRCNT1 [R] 00000000 00000000		BTR1 [R/W] 00100011 00000001		
00C108 <sub>H</sub>	INTR1 [R] 00000000 00000000		TESTR1 [R/W] 00000000 X0000000		
00C10C <sub>H</sub>	BRPE1 [R/W] 00000000 00000000		CBSYNC1		
00C110 <sub>H</sub>	IF1CREQ1 [R/W] 00000000 00000001		IF1CMSK1 [R/W] 00000000 00000000		
00C114 <sub>H</sub>	IF1MSK21 [R/W] 11111111 11111111		IF1MSK11 [R/W] 11111111 11111111		
00C118 <sub>H</sub>	IF1ARB21 [R/W] 00000000 00000000		IF1ARB11 [R/W] 00000000 00000000		
00C11C <sub>H</sub>	IF1MCTR1 [R/W] 00000000 00000000		Reserved		
00C120 <sub>H</sub>	IF1DTA11 [R/W] 00000000 00000000		IF1DTA21 [R/W] 00000000 00000000		
00C124 <sub>H</sub>	IF1DTB11 [R/W] 00000000 00000000		IF1DTB21 [R/W] 00000000 00000000		
00C128 <sub>H</sub> to 00C12C <sub>H</sub>	Reserved				CAN 1 IF 1 Register
00C130 <sub>H</sub>	IF1DTA21 [R/W] 00000000 00000000		IF1DTA11 [R/W] 00000000 00000000		
00C134 <sub>H</sub>	IF1DTB21 [R/W] 00000000 00000000		IF1DTB11 [R/W] 00000000 00000000		
00C138 <sub>H</sub> to 00C13C <sub>H</sub>	Reserved				

# MB91460B Series

Address	Register				Block	
	+0	+1	+2	+3		
00C140 <sub>H</sub>	IF2CREQ1 [R/W] 00000000 00000001		IF2CMSK1 [R/W] 00000000 00000000		CAN 1 IF 2 Register	
00C144 <sub>H</sub>	IF2MSK21 [R/W] 11111111 11111111		IF2MSK11 [R/W] 11111111 11111111			
00C148 <sub>H</sub>	IF2ARB21 [R/W] 00000000 00000000		IF2ARB11 [R/W] 00000000 00000000			
00C14C <sub>H</sub>	IF2MCTR1 [R/W] 00000000 00000000		Reserved			
00C150 <sub>H</sub>	IF2DTA11 [R/W] 00000000 00000000		IF2DTA21 [R/W] 00000000 00000000			
00C154 <sub>H</sub>	IF2DTB11 [R/W] 00000000 00000000		IF2DTB21 [R/W] 00000000 00000000			
00C158 <sub>H</sub> to 00C15C <sub>H</sub>	Reserved					
00C160 <sub>H</sub>	IF2DTA21 [R/W] 00000000 00000000		IF2DTA11 [R/W] 00000000 00000000			
00C164 <sub>H</sub>	IF2DTB21 [R/W] 00000000 00000000		IF2DTB11 [R/W] 00000000 00000000			
00C168 <sub>H</sub> to 00C17C <sub>H</sub>	Reserved					
00C180 <sub>H</sub>	TREQR21 [R] 00000000 00000000		TREQR11 [R] 00000000 00000000		CAN 1 Status Flags	
00C184 <sub>H</sub> to 00C18C <sub>H</sub>	Reserved		Reserved			
00C190 <sub>H</sub>	NEWDT21 [R] 00000000 00000000		NEWDT11 [R] 00000000 00000000			
00C194 <sub>H</sub> to 00C19C <sub>H</sub>	Reserved		Reserved			
00C1A0 <sub>H</sub>	INTPND21 [R] 00000000 00000000		INTPND11 [R] 00000000 00000000			
00C1A4 <sub>H</sub> to 00C1AC <sub>H</sub>	Reserved		Reserved			
00C1B0 <sub>H</sub>	MSGVAL21 [R] 00000000 00000000		MSGVAL11 [R] 00000000 00000000			
00C1B4 <sub>H</sub> to 00C1FC <sub>H</sub>	Reserved		Reserved			

# MB91460B Series

Address	Register				Block	
	+0	+1	+2	+3		
00C200 <sub>H</sub>	CTRLR2 [R/W] 00000000 00000001		STATR2 [R/W] 00000000 00000000		CAN 2 Control Register	
00C204 <sub>H</sub>	ERRCNT2 [R] 00000000 00000000		BTR2 [R/W] 00100011 00000001			
00C208 <sub>H</sub>	INTR2 [R] 00000000 00000000		TESTR2 [R/W] 00000000 X0000000			
00C20C <sub>H</sub>	BRPE2 [R/W] 00000000 00000000		CBSYNC2			
00C210 <sub>H</sub>	IF1CREQ2 [R/W] 00000000 00000001		IF1CMSK2 [R/W] 00000000 00000000			
00C214 <sub>H</sub>	IF1MSK22 [R/W] 11111111 11111111		IF1MSK12 [R/W] 11111111 11111111			
00C218 <sub>H</sub>	IF1ARB22 [R/W] 00000000 00000000		IF1ARB12 [R/W] 00000000 00000000			
00C21C <sub>H</sub>	IF1MCTR2 [R/W] 00000000 00000000		Reserved			
00C220 <sub>H</sub>	IF1DTA12 [R/W] 00000000 00000000		IF1DTA22 [R/W] 00000000 00000000			
00C224 <sub>H</sub>	IF1DTB12 [R/W] 00000000 00000000		IF1DTB22 [R/W] 00000000 00000000		CAN 2 IF 1 Register	
00C228 <sub>H</sub> to 00C22C <sub>H</sub>	Reserved					
00C230 <sub>H</sub>	IF1DTA22 [R/W] 00000000 00000000		IF1DTA12 [R/W] 00000000 00000000			
00C234 <sub>H</sub>	IF1DTB22 [R/W] 00000000 00000000		IF1DTB12 [R/W] 00000000 00000000			
00C238 <sub>H</sub> to 00C23C <sub>H</sub>	Reserved					

# MB91460B Series

Address	Register				Block	
	+0	+1	+2	+3		
00C240 <sub>H</sub>	IF2CREQ2 [R/W] 00000000 00000001		IF2CMSK2 [R/W] 00000000 00000000		CAN 2 IF 2 Register	
00C244 <sub>H</sub>	IF2MSK22 [R/W] 11111111 11111111		IF2MSK12 [R/W] 11111111 11111111			
00C248 <sub>H</sub>	IF2ARB22 [R/W] 00000000 00000000		IF2ARB12 [R/W] 00000000 00000000			
00C24C <sub>H</sub>	IF2MCTR2 [R/W] 00000000 00000000		Reserved			
00C250 <sub>H</sub>	IF2DTA12 [R/W] 00000000 00000000		IF2DTA22 [R/W] 00000000 00000000			
00C254 <sub>H</sub>	IF2DTB12 [R/W] 00000000 00000000		IF2DTB22 [R/W] 00000000 00000000			
00C258 <sub>H</sub> to 00C25C <sub>H</sub>	Reserved					
00C260 <sub>H</sub>	IF2DTA22 [R/W] 00000000 00000000		IF2DTA12 [R/W] 00000000 00000000			
00C264 <sub>H</sub>	IF2DTB22 [R/W] 00000000 00000000		IF2DTB12 [R/W] 00000000 00000000			
00C268 <sub>H</sub> to 00C27C <sub>H</sub>	Reserved					
00C280 <sub>H</sub>	TREQR22 [R] 00000000 00000000		TREQR12 [R] 00000000 00000000		CAN 2 Status Flags	
00C284 <sub>H</sub> to 00C28C <sub>H</sub>	Reserved		Reserved			
00C290 <sub>H</sub>	NEWDT22 [R] 00000000 00000000		NEWDT12 [R] 00000000 00000000			
00C294 <sub>H</sub> to 00C29C <sub>H</sub>	Reserved		Reserved			
00C2A0 <sub>H</sub>	INTPND22 [R] 00000000 00000000		INTPND12 [R] 00000000 00000000			
00C2A4 <sub>H</sub> to 00C2AC <sub>H</sub>	Reserved		Reserved			
00C2B0 <sub>H</sub>	MSGVAL22 [R] 00000000 00000000		MSGVAL12 [R] 00000000 00000000			
00C2B4 <sub>H</sub> to 00C2FC <sub>H</sub>	Reserved				Reserved	

# MB91460B Series

Address	Register				Block	
	+0	+1	+2	+3		
00C300 <sub>H</sub>	CTRLR3 [R/W] 00000000 00000001		STATR3 [R/W] 00000000 00000000		CAN 3 Control Register  Note: Not on MB91F465BB/ MB91F464BB	
00C304 <sub>H</sub>	ERRCNT3 [R] 00000000 00000000		BTR3 [R/W] 00100011 00000001			
00C308 <sub>H</sub>	INTR3 [R] 00000000 00000000		TESTR3 [R/W] 00000000 X0000000			
00C30C <sub>H</sub>	BRPE3 [R/W] 00000000 00000000		CBSYNC3			
00C310 <sub>H</sub>	IF1CREQ3 [R/W] 00000000 00000001		IF1CMSK3 [R/W] 00000000 00000000		CAN 3 IF 1 Register  Note: Not on MB91F465BB/ MB91F464BB	
00C314 <sub>H</sub>	IF1MSK23 [R/W] 11111111 11111111		IF1MSK13 [R/W] 11111111 11111111			
00C318 <sub>H</sub>	IF1ARB23 [R/W] 00000000 00000000		IF1ARB13 [R/W] 00000000 00000000			
00C31C <sub>H</sub>	IF1MCTR3 [R/W] 00000000 00000000		Reserved			
00C320 <sub>H</sub>	IF1DTA13 [R/W] 00000000 00000000		IF1DTA23 [R/W] 00000000 00000000		CAN 3 IF 1 Register  Note: Not on MB91F465BB/ MB91F464BB	
00C324 <sub>H</sub>	IF1DTB13 [R/W] 00000000 00000000		IF1DTB23 [R/W] 00000000 00000000			
00C328 <sub>H</sub> to 00C32C <sub>H</sub>	Reserved					
00C330 <sub>H</sub>	IF1DTA23 [R/W] 00000000 00000000		IF1DTA13 [R/W] 00000000 00000000			
00C334 <sub>H</sub>	IF1DTB23 [R/W] 00000000 00000000		IF1DTB13 [R/W] 00000000 00000000			
00C338 <sub>H</sub> to 00C33C <sub>H</sub>	Reserved					

# MB91460B Series

Address	Register				Block	
	+0	+1	+2	+3		
00C340 <sub>H</sub>	IF2CREQ3 [R/W] 00000000 00000001		IF2CMSK3 [R/W] 00000000 00000000		CAN 3 IF 2 Register  Note: Not on MB91F465BB/ MB91F464BB	
00C344 <sub>H</sub>	IF2MSK23 [R/W] 11111111 11111111		IF2MSK13 [R/W] 11111111 11111111			
00C348 <sub>H</sub>	IF2ARB23 [R/W] 00000000 00000000		IF2ARB13 [R/W] 00000000 00000000			
00C34C <sub>H</sub>	IF2MCTR3 [R/W] 00000000 00000000		Reserved			
00C350 <sub>H</sub>	IF2DTA13 [R/W] 00000000 00000000		IF2DTA23 [R/W] 00000000 00000000			
00C354 <sub>H</sub>	IF2DTB13 [R/W] 00000000 00000000		IF2DTB23 [R/W] 00000000 00000000			
00C358 <sub>H</sub> to 00C35C <sub>H</sub>	Reserved					
00C360 <sub>H</sub>	IF2DTA23 [R/W] 00000000 00000000		IF2DTA13 [R/W] 00000000 00000000			
00C364 <sub>H</sub>	IF2DTB23 [R/W] 00000000 00000000		IF2DTB13 [R/W] 00000000 00000000			
00C368 <sub>H</sub> to 00C37C <sub>H</sub>	Reserved					
00C380 <sub>H</sub>	TREQR23 [R] 00000000 00000000		TREQR13 [R] 00000000 00000000		CAN 3 Status Flags  Note: Not on MB91F465BB/ MB91F464BB	
00C384 <sub>H</sub> to 00C38C <sub>H</sub>	Reserved					
00C390 <sub>H</sub>	NEWDT23 [R] 00000000 00000000		NEWDT13 [R] 00000000 00000000			
00C394 <sub>H</sub> to 00C39C <sub>H</sub>	Reserved					
00C3A0 <sub>H</sub>	INTPND23 [R] 00000000 00000000		INTPND13 [R] 00000000 00000000			
00C3A4 <sub>H</sub> to 00C3AC <sub>H</sub>	Reserved					
00C3B0 <sub>H</sub>	MSGVAL23 [R] 00000000 00000000		MSGVAL13 [R] 00000000 00000000			
00C3B4 <sub>H</sub> to 00C3FC <sub>H</sub>	Reserved					

# MB91460B Series

Address	Register				Block	
	+0	+1	+2	+3		
00C400 <sub>H</sub>	CTRLR4 [R/W] 00000000 00000001		STATR4 [R/W] 00000000 00000000		CAN 4 Control Register  Note: Not on MB91F465BB/ MB91F464BB	
00C404 <sub>H</sub>	ERRCNT4 [R] 00000000 00000000		BTR4 [R/W] 00100011 00000001			
00C408 <sub>H</sub>	INTR4 [R] 00000000 00000000		TESTR4 [R/W] 00000000 X0000000			
00C40C <sub>H</sub>	BRPE4 [R/W] 00000000 00000000		CBSYNC4			
00C410 <sub>H</sub>	IF1CREQ4 [R/W] 00000000 00000001		IF1CMSK4 [R/W] 00000000 00000000		CAN 4 IF 1 Register  Note: Not on MB91F465BB/ MB91F464BB	
00C414 <sub>H</sub>	IF1MSK24 [R/W] 11111111 11111111		IF1MSK14 [R/W] 11111111 11111111			
00C418 <sub>H</sub>	IF1ARB24 [R/W] 00000000 00000000		IF1ARB14 [R/W] 00000000 00000000			
00C41C <sub>H</sub>	IF1MCTR4 [R/W] 00000000 00000000		Reserved			
00C420 <sub>H</sub>	IF1DTA14 [R/W] 00000000 00000000		IF1DTA24 [R/W] 00000000 00000000		CAN 4 IF 1 Register  Note: Not on MB91F465BB/ MB91F464BB	
00C424 <sub>H</sub>	IF1DTB14 [R/W] 00000000 00000000		IF1DTB24 [R/W] 00000000 00000000			
00C428 <sub>H</sub> to 00C42C <sub>H</sub>	Reserved					
00C430 <sub>H</sub>	IF1DTA24 [R/W] 00000000 00000000		IF1DTA14 [R/W] 00000000 00000000			
00C434 <sub>H</sub>	IF1DTB24 [R/W] 00000000 00000000		IF1DTB14 [R/W] 00000000 00000000			
00C438 <sub>H</sub> to 00C43C <sub>H</sub>	Reserved					

# MB91460B Series

Address	Register				Block	
	+0	+1	+2	+3		
00C440 <sub>H</sub>	IF2CREQ4 [R/W] 00000000 00000001		IF2CMSK4 [R/W] 00000000 00000000		CAN 4 IF 2 Register  Note: Not on MB91F465BB/ MB91F464BB	
00C444 <sub>H</sub>	IF2MSK24 [R/W] 11111111 11111111		IF2MSK14 [R/W] 11111111 11111111			
00C448 <sub>H</sub>	IF2ARB24 [R/W] 00000000 00000000		IF2ARB14 [R/W] 00000000 00000000			
00C44C <sub>H</sub>	IF2MCTR4 [R/W] 00000000 00000000		Reserved			
00C450 <sub>H</sub>	IF2DTA14 [R/W] 00000000 00000000		IF2DTA24 [R/W] 00000000 00000000			
00C454 <sub>H</sub>	IF2DTB14 [R/W] 00000000 00000000		IF2DTB24 [R/W] 00000000 00000000			
00C458 <sub>H</sub> to 00C45C <sub>H</sub>	Reserved					
00C460 <sub>H</sub>	IF2DTA24 [R/W] 00000000 00000000		IF2DTA14 [R/W] 00000000 00000000			
00C464 <sub>H</sub>	IF2DTB24 [R/W] 00000000 00000000		IF2DTB14 [R/W] 00000000 00000000			
00C468 <sub>H</sub> to 00C47C <sub>H</sub>	Reserved					
00C480 <sub>H</sub>	TREQR24 [R] 00000000 00000000		TREQR14 [R] 00000000 00000000		CAN 4 Status Flags  Note: Not on MB91F465BB/ MB91F464BB	
00C484 <sub>H</sub> to 00C48C <sub>H</sub>	Reserved					
00C490 <sub>H</sub>	NEWDT24 [R] 00000000 00000000		NEWDT14 [R] 00000000 00000000			
00C494 <sub>H</sub> to 00C49C <sub>H</sub>	Reserved					
00C4A0 <sub>H</sub>	INTPND24 [R] 00000000 00000000		INTPND14 [R] 00000000 00000000			
00C4A4 <sub>H</sub> to 00C4AC <sub>H</sub>	Reserved					
00C4B0 <sub>H</sub>	MSGVAL24 [R] 00000000 00000000		MSGVAL14 [R] 00000000 00000000			
00C4B4 <sub>H</sub> to 00C4FC <sub>H</sub>	Reserved					

# MB91460B Series

Address	Register				Block	
	+0	+1	+2	+3		
00C500 <sub>H</sub>	CTRLR5 [R/W] 00000000 00000001		STATR5 [R/W] 00000000 00000000		CAN 5 Control Register  Note: Not on MB91F465BB/ MB91F464BB	
00C504 <sub>H</sub>	ERRCNT5 [R] 00000000 00000000		BTR5 [R/W] 00100011 00000001			
00C508 <sub>H</sub>	INTR5 [R] 00000000 00000000		TESTR5 [R/W] 00000000 X0000000			
00C50C <sub>H</sub>	BRPE5 [R/W] 00000000 00000000		CBSYNC5			
00C510 <sub>H</sub>	IF1CREQ5 [R/W] 00000000 00000001		IF1CMSK5 [R/W] 00000000 00000000		CAN 5 IF 1 Register  Note: Not on MB91F465BB/ MB91F464BB	
00C514 <sub>H</sub>	IF1MSK25 [R/W] 11111111 11111111		IF1MSK15 [R/W] 11111111 11111111			
00C518 <sub>H</sub>	IF1ARB25 [R/W] 00000000 00000000		IF1ARB15 [R/W] 00000000 00000000			
00C51C <sub>H</sub>	IF1MCTR5 [R/W] 00000000 00000000		Reserved			
00C520 <sub>H</sub>	IF1DTA15 [R/W] 00000000 00000000		IF1DTA25 [R/W] 00000000 00000000			
00C524 <sub>H</sub>	IF1DTB15 [R/W] 00000000 00000000		IF1DTB25 [R/W] 00000000 00000000			
00C528 <sub>H</sub> to 00C52C <sub>H</sub>	Reserved					
00C530 <sub>H</sub>	IF1DTA25 [R/W] 00000000 00000000		IF1DTA15 [R/W] 00000000 00000000			
00C534 <sub>H</sub>	IF1DTB25 [R/W] 00000000 00000000		IF1DTB15 [R/W] 00000000 00000000			
00C538 <sub>H</sub> to 00C53C <sub>H</sub>	Reserved					

# MB91460B Series

Address	Register				Block	
	+0	+1	+2	+3		
00C540 <sub>H</sub>	IF2CREQ5 [R/W] 00000000 00000001		IF2CMSK5 [R/W] 00000000 00000000		CAN 5 IF 2 Register  Note: Not on MB91F465BB/ MB91F464BB	
00C544 <sub>H</sub>	IF2MSK25 [R/W] 11111111 11111111		IF2MSK15 [R/W] 11111111 11111111			
00C548 <sub>H</sub>	IF2ARB25 [R/W] 00000000 00000000		IF2ARB15 [R/W] 00000000 00000000			
00C54C <sub>H</sub>	IF2MCTR5 [R/W] 00000000 00000000		Reserved			
00C550 <sub>H</sub>	IF2DTA15 [R/W] 00000000 00000000		IF2DTA25 [R/W] 00000000 00000000			
00C554 <sub>H</sub>	IF2DTB15 [R/W] 00000000 00000000		IF2DTB25 [R/W] 00000000 00000000			
00C558 <sub>H</sub> to 00C55C <sub>H</sub>	Reserved					
00C560 <sub>H</sub>	IF2DTA25 [R/W] 00000000 00000000		IF2DTA15 [R/W] 00000000 00000000			
00C564 <sub>H</sub>	IF2DTB25 [R/W] 00000000 00000000		IF2DTB15 [R/W] 00000000 00000000			
00C568 <sub>H</sub> to 00C57C <sub>H</sub>	Reserved					
00C580 <sub>H</sub>	TREQR25 [R] 00000000 00000000		TREQR15 [R] 00000000 00000000		CAN 5 Status Flags  Note: Not on MB91F465BB/ MB91F464BB	
00C584 <sub>H</sub> to 00C58C <sub>H</sub>	Reserved					
00C590 <sub>H</sub>	NEWDT25 [R] 00000000 00000000		NEWDT15 [R] 00000000 00000000			
00C594 <sub>H</sub> to 00C59C <sub>H</sub>	Reserved					
00C5A0 <sub>H</sub>	INTPND25 [R] 00000000 00000000		INTPND15 [R] 00000000 00000000			
00C5A4 <sub>H</sub> to 00C5AC <sub>H</sub>	Reserved				MSGVAL25 [R] 00000000 00000000	
00C5B0 <sub>H</sub>	MSGVAL15 [R] 00000000 00000000		MSGVAL15 [R] 00000000 00000000			
00C5B4 <sub>H</sub> to 00EFC <sub>H</sub>	Reserved					

# MB91460B Series

Address	Register				Block	
	+0	+1	+2	+3		
00F000 <sub>H</sub>	BCTRL [R/W] ----- 11111100 00000000				EDSU / MPU	
00F004 <sub>H</sub>	BSTAT [R/W] ----- 000 00000000 10 -- 000000					
00F008 <sub>H</sub>	BIAC [R] ----- 00000000 00000000					
00F00C <sub>H</sub>	BOAC [R] ----- 00000000 00000000					
00F010 <sub>H</sub>	BIRQ [R/W] ----- 00000000 00000000					
00F014 <sub>H</sub> to 00F01C <sub>H</sub>	Reserved					
00F020 <sub>H</sub>	BCR0 [R/W] ----- 00000000 00000000 00000000					
00F024 <sub>H</sub>	BCR1 [R/W] ----- 00000000 00000000 00000000					
00F028 <sub>H</sub>	BCR2 [R/W] ----- 00000000 00000000 00000000					
00F02C <sub>H</sub>	BCR3 [R/W] ----- 00000000 00000000 00000000					
00F030 <sub>H</sub> to 00F07C <sub>H</sub>	Reserved				Reserved	

# MB91460B Series

Address	Register				Block
	+0	+1	+2	+3	
00F080 <sub>H</sub>	BAD0 [R/W] XXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX				EDSU / MPU
00F084 <sub>H</sub>	BAD1 [R/W] XXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX				
00F088 <sub>H</sub>	BAD2 [R/W] XXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX				
00F08C <sub>H</sub>	BAD3 [R/W] XXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX				
00F090 <sub>H</sub>	BAD4 [R/W] XXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX				
00F094 <sub>H</sub>	BAD5 [R/W] XXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX				
00F098 <sub>H</sub>	BAD6 [R/W] XXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX				
00F09C <sub>H</sub>	BAD7 [R/W] XXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX				
00F0A0 <sub>H</sub>	BAD8 [R/W] XXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX				
00F0A4 <sub>H</sub>	BAD9 [R/W] XXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX				
00F0A8 <sub>H</sub>	BAD10 [R/W] XXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX				
00F0AC <sub>H</sub>	BAD11 [R/W] XXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX				
00F0B0 <sub>H</sub>	BAD12 [R/W] XXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX				
00F0B4 <sub>H</sub>	BAD13 [R/W] XXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX				
00F0B8 <sub>H</sub>	BAD14 [R/W] XXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX				
00F0BC <sub>H</sub>	BAD15 [R/W] XXXXXXX XXXXXXXX XXXXXXXX XXXXXXXX				
00F0C0 <sub>H</sub> to 01FFFC <sub>H</sub>	Reserved				EDSU / MPU
020000 <sub>H</sub> to 02FFFC <sub>H</sub>	D-RAM size is 24 Kbytes : 02A000 <sub>H</sub> - 02FFFC <sub>H</sub> (data access is 0 wait cycles)				D-RAM area
030000 <sub>H</sub> to 03FFFC <sub>H</sub>	ID-RAM size is 16 Kbytes : 030000 <sub>H</sub> - 033FFC <sub>H</sub> (instruction access is 0 wait cycles, data access is 1 wait cycle)				ID-RAM area

\*1 : depends on the number of available CAN channels

# MB91460B Series

\*2 : ACR0 [11 : 10] depends on Mode vector fetch information on bus width

\*\*3 : TCR [3 : 0] INIT value = 0000, keeps value after RST

## 2. Flash memory and external bus area

### 2.1. MB91F467BA/466BA

<b>64bit read</b>	<b>dat[63:0]</b>									
<b>32bit read/write</b>	<b>dat[31:0]</b>				<b>dat[31:0]</b>					
<b>16bit read/write</b>	<b>dat[31:16]</b>		<b>dat[15:0]</b>		<b>dat[31:16]</b>		<b>dat[15:0]</b>			
<b>Address</b>	<b>Register</b>								<b>Block</b>	
	<b>+ 0</b>	<b>+ 1</b>	<b>+ 2</b>	<b>+ 3</b>	<b>+ 4</b>	<b>+ 5</b>	<b>+ 6</b>	<b>+ 7</b>		
040000 <sub>H</sub> to 05FFFF8 <sub>H</sub>	SA8 (64KB)				SA9 (64KB)				ROMS0	
060000 <sub>H</sub> to 07FFFF8 <sub>H</sub>	SA10 (64KB)				SA11 (64KB)				ROMS1	
080000 <sub>H</sub> to 09FFFF8 <sub>H</sub>	SA12 (64KB)				SA13 (64KB)				ROMS2	
0A0000 <sub>H</sub> to 0BFFFF8 <sub>H</sub>	SA14 (64KB)				SA15 (64KB)				ROMS3	
0C0000 <sub>H</sub> to 0DFFFF8 <sub>H</sub>	SA16 (64KB)				SA17 (64KB)				ROMS4	
0E0000 <sub>H</sub> to 0FFFFF0 <sub>H</sub>	SA18 (64KB)				SA19 (64KB)				ROMS5	
0FFFFF8 <sub>H</sub>	FMV [R] 06 00 00 00 <sub>H</sub>				FRV [R] 00 00 BF F8 <sub>H</sub>					
100000 <sub>H</sub> to 11FFFF8 <sub>H</sub>	SA20 (64KB, MB91F467BA) Reserved (MB91F466BA)				SA21 (64KB, MB91F467BA) Reserved (MB91F466BA)				ROMS6	
120000 <sub>H</sub> to 13FFFF8 <sub>H</sub>	SA22 (64KB, MB91F467BA) Reserved (MB91F466BA)				SA23 (64KB, MB91F467B) Reserved (MB91F466BA)					
140000 <sub>H</sub> to 143FF8 <sub>H</sub>	SA0 (8KB)				SA1 (8KB)				ROMS7	
144000 <sub>H</sub> to 17FF8 <sub>H</sub>	SA2 (8KB)				SA3 (8KB)					
148000 <sub>H</sub> to 14BFF8 <sub>H</sub>	SA4 (8KB)				SA5 (8KB)					
14C000 <sub>H</sub> to 14FFF8 <sub>H</sub>	SA6 (8KB)				SA7 (8KB)					
150000 <sub>H</sub> to 17FFFF8 <sub>H</sub>	Reserved									

# MB91460B Series

<b>64bit read</b>	<b>dat[63:0]</b>									
<b>32bit read/write</b>	<b>dat[31:0]</b>				<b>dat[31:0]</b>					
<b>16bit read/write</b>	<b>dat[31:16]</b>		<b>dat[15:0]</b>		<b>dat[31:16]</b>		<b>dat[15:0]</b>			
<b>Address</b>	<b>Register</b>								<b>Block</b>	
	<b>+ 0</b>	<b>+ 1</b>	<b>+ 2</b>	<b>+ 3</b>	<b>+ 4</b>	<b>+ 5</b>	<b>+ 6</b>	<b>+ 7</b>		
	180000 <sub>H</sub> to 1BFFF8 <sub>H</sub>	External Bus Area								
	1C0000 <sub>H</sub> to 1FFFF8 <sub>H</sub>	ROMS8								
	200000 <sub>H</sub> to 27FFF8 <sub>H</sub>	ROMS9								
	280000 <sub>H</sub> to 2FFFF8 <sub>H</sub>	ROMS10								
	300000 <sub>H</sub> to 37FFF8 <sub>H</sub>	ROMS11								
	380000 <sub>H</sub> to 3FFFF8 <sub>H</sub>	ROMS12								
	400000 <sub>H</sub> to 47FFF8 <sub>H</sub>	ROMS13								
	480000 <sub>H</sub> to 4FFFF8 <sub>H</sub>	ROMS14								
		ROMS15								

Notes: Write operations to address 0FFFF8<sub>H</sub> and 0FFFC<sub>H</sub> are not possible. When reading these addresses, the values shown above will be read.

## 2.1. MB91F465BB/464BB

<b>32bit read</b>	<b>dat[31:0]</b>				<b>dat[31:0]</b>					
<b>16bit read/write</b>	<b>dat[31:16]</b>		<b>dat[15:0]</b>		<b>dat[31:16]</b>		<b>dat[15:0]</b>			
<b>Address</b>	<b>Register</b>								<b>Block</b>	
	<b>+ 0</b>	<b>+ 1</b>	<b>+ 2</b>	<b>+ 3</b>	<b>+ 4</b>	<b>+ 5</b>	<b>+ 6</b>	<b>+ 7</b>		
	040000 <sub>H</sub> to 05FFF8 <sub>H</sub>	Reserved				Reserved				
	060000 <sub>H</sub> to 07FFF8 <sub>H</sub>	Reserved				Reserved				
	080000 <sub>H</sub> to 09FFF8 <sub>H</sub>	SA12 (64KB) Reserved (MB91F464BB)				SA13 (64KB) Reserved (MB91F464BB)				
	0A0000 <sub>H</sub> to 0BFFF8 <sub>H</sub>	SA14 (64KB)				SA15 (64KB)				

# MB91460B Series

$0C0000_H$ to $0DFFF8_H$	SA16 (64KB)	SA17 (64KB)	ROMS4
$0E0000_H$ to $0FFFF0_H$	SA18 (64KB)	SA19 (64KB)	
$0FFFF8_H$	FMV [R] $06\ 00\ 00\ 00_H$	FRV [R] $00\ 00\ BF\ F8_H$	ROMS5
$100000_H$ to $11FFFF8_H$	External Bus Area		ROMS6
$120000_H$ to $13FFFF8_H$	External Bus Area		
$140000_H$ to $143FF8_H$	External Bus Area		
$144000_H$ to $17FF8_H$			
$148000_H$ to $14BFF8_H$	SA4 (8KB)	SA5 (8KB)	
$14C000_H$ to $14FFFF8_H$	SA6 (8KB)	SA7 (8KB)	
$150000_H$ to $17FF8_H$	Reserved		

# MB91460B Series

<b>32bit read/write</b>	<b>dat[31:0]</b>				<b>dat[31:0]</b>				
<b>16bit read/write</b>	<b>dat[31:16]</b>		<b>dat[15:0]</b>		<b>dat[31:16]</b>		<b>dat[15:0]</b>		
<b>Address</b>	<b>Register</b>								<b>Block</b>
	+ 0	+ 1	+ 2	+ 3	+ 4	+ 5	+ 6	+ 7	
180000 <sub>H</sub> to 1BFFFF8 <sub>H</sub>	External Bus Area								ROMS8
1C0000 <sub>H</sub> to 1FFFFF8 <sub>H</sub>	External Bus Area								ROMS9
200000 <sub>H</sub> to 27FFFF8 <sub>H</sub>	External Bus Area								ROMS10
280000 <sub>H</sub> to 2FFFFFF8 <sub>H</sub>	External Bus Area								ROMS11
300000 <sub>H</sub> to 37FFFF8 <sub>H</sub>	External Bus Area								ROMS12
380000 <sub>H</sub> to 3FFFFFF8 <sub>H</sub>	External Bus Area								ROMS13
400000 <sub>H</sub> to 47FFFF8 <sub>H</sub>	External Bus Area								ROMS14
480000 <sub>H</sub> to 4FFFFFF8 <sub>H</sub>	External Bus Area								ROMS15

Notes: Write operations to address 0FFFFF8<sub>H</sub> and 0FFFFFC<sub>H</sub> are not possible. When reading these addresses, the values shown above will be read.

On MB91F465BB/F464BB, write access to the flash is only possible in 16-bit mode.

## ■ INTERRUPT VECTOR TABLE

Interrupt	Interrupt number		Interrupt level *1		Interrupt vector *2		DMA Resource number
	Decimal	Hexa-decimal	Setting Register	Register address	Offset	Default vector address	
Reset	0	00	—	—	3FC <sub>H</sub>	000FFFFC <sub>H</sub>	—
Mode vector	1	01	—	—	3F8 <sub>H</sub>	000FFFF8 <sub>H</sub>	—
System reserved	2	02	—	—	3F4 <sub>H</sub>	000FFFF4 <sub>H</sub>	—
System reserved	3	03	—	—	3F0 <sub>H</sub>	000FFFF0 <sub>H</sub>	—
System reserved	4	04	—	—	3EC <sub>H</sub>	000FFFECE <sub>H</sub>	—

# MB91460B Series

Interrupt	Interrupt number		Interrupt level *1		Interrupt vector *2		DMA Resource number
	Decimal	Hexa-decimal	Setting Register	Register address	Offset	Default vector address	
CPU supervisor mode (INT #5 instruction) *5	5	05	—	—	3E8H	000FFFE8H	—
Memory Protection exception *5	6	06	—	—	3E4H	000FFFE4H	—
System reserved	7	07	—	—	3E0H	000FFFE0H	—
System reserved	8	08	—	—	3DCH	000FFFDCH	—
System reserved	9	09	—	—	3D8H	000FFF8DH	—
System reserved	10	0A	—	—	3D4H	000FFF84H	—
System reserved	11	0B	—	—	3D0H	000FFF80H	—
System reserved	12	0C	—	—	3CCH	000FFF8CH	—
System reserved	13	0D	—	—	3C8H	000FFF88H	—
Undefined instruction exception	14	0E	—	—	3C4H	000FFF84H	—
NMI request	15	0F	F <sub>H</sub> fixed		3C0H	000FFF80H	—
External Interrupt 0	16	10	ICR00	440H	3BCH	000FFFBCH	0, 16
External Interrupt 1	17	11			3B8H	000FFF88H	1, 17
External Interrupt 2	18	12	ICR01	441H	3B4H	000FFF84H	2, 18
External Interrupt 3	19	13			3B0H	000FFF80H	3, 19
External Interrupt 4	20	14	ICR02	442H	3ACH	000FFFACH	20
External Interrupt 5	21	15			3A8H	000FFF88H	21
External Interrupt 6	22	16	ICR03	443H	3A4H	000FFF84H	22
External Interrupt 7	23	17			3AOH	000FFF80H	23
External Interrupt 8	24	18	ICR04	444H	39CH	000FFF9CH	—
External Interrupt 9	25	19			398H	000FFF98H	—
External Interrupt 10	26	1A	ICR05	445H	394H	000FFF94H	—
External Interrupt 11	27	1B			390H	000FFF90H	—
External Interrupt 12	28	1C	ICR06	446H	38CH	000FFF8CH	—
External Interrupt 13	29	1D			388H	000FFF88H	—
External Interrupt 14	30	1E	ICR07	447H	384H	000FFF84H	—
External Interrupt 15	31	1F			380H	000FFF80H	—
Reload Timer 0	32	20	ICR08	448H	37CH	000FFF7CH	4, 32
Reload Timer 1	33	21			378H	000FFF78H	5, 33
Reload Timer 2	34	22	ICR09	449H	374H	000FFF74H	34
Reload Timer 3	35	23			370H	000FFF70H	35
Reload Timer 4	36	24	ICR10	44AH	36CH	000FFF6CH	36
Reload Timer 5	37	25			368H	000FFF68H	37

# MB91460B Series

Interrupt	Interrupt number		Interrupt level *1		Interrupt vector *2		DMA Resource number
	Decimal	Hexa-decimal	Setting Register	Register address	Offset	Default vector address	
Reload Timer 6	38	26	ICR11	44B <sub>H</sub>	364 <sub>H</sub>	000FFF64 <sub>H</sub>	38
Reload Timer 7	39	27			360 <sub>H</sub>	000FFF60 <sub>H</sub>	39
Free Run Timer 0	40	28	ICR12	44C <sub>H</sub>	35C <sub>H</sub>	000FFF5C <sub>H</sub>	40
Free Run Timer 1	41	29			358 <sub>H</sub>	000FFF58 <sub>H</sub>	41
Free Run Timer 2	42	2A	ICR13	44D <sub>H</sub>	354 <sub>H</sub>	000FFF54 <sub>H</sub>	42
Free Run Timer 3	43	2B			350 <sub>H</sub>	000FFF50 <sub>H</sub>	43
Free Run Timer 4	44	2C	ICR14	44E <sub>H</sub>	34C <sub>H</sub>	000FFF4C <sub>H</sub>	44
Free Run Timer 5	45	2D			348 <sub>H</sub>	000FFF48 <sub>H</sub>	45
Free Run Timer 6	46	2E	ICR15	44F <sub>H</sub>	344 <sub>H</sub>	000FFF44 <sub>H</sub>	46
Free Run Timer 7	47	2F			340 <sub>H</sub>	000FFF40 <sub>H</sub>	47
CAN 0	48	30	ICR16	450 <sub>H</sub>	33C <sub>H</sub>	000FFF3C <sub>H</sub>	—
CAN 1	49	31			338 <sub>H</sub>	000FFF38 <sub>H</sub>	—
CAN 2	50	32	ICR17	451 <sub>H</sub>	334 <sub>H</sub>	000FFF34 <sub>H</sub>	—
CAN 3 Not on MB91F465BB/464BB	51	33			330 <sub>H</sub>	000FFF30 <sub>H</sub>	—
CAN 4 Not on MB91F465BB/464BB	52	34	ICR18	452 <sub>H</sub>	32C <sub>H</sub>	000FFF2C <sub>H</sub>	—
CAN 5 Not on MB91F465BB/464BB	53	35			328 <sub>H</sub>	000FFF28 <sub>H</sub>	—
LIN-USART 0 RX	54	36	ICR19	453 <sub>H</sub>	324 <sub>H</sub>	000FFF24 <sub>H</sub>	6, 48
LIN-USART 0 TX	55	37			320 <sub>H</sub>	000FFF20 <sub>H</sub>	7, 49
Reserved	56	38	ICR20	454 <sub>H</sub>	31C <sub>H</sub>	000FFF1C <sub>H</sub>	8, 50
Reserved	57	39			318 <sub>H</sub>	000FFF18 <sub>H</sub>	9, 51
LIN-USART 2 RX	58	3A	ICR21	455 <sub>H</sub>	314 <sub>H</sub>	000FFF14 <sub>H</sub>	52
LIN-USART 2 TX	59	3B			310 <sub>H</sub>	000FFF10 <sub>H</sub>	53
LIN-USART 3 RX	60	3C	ICR22	456 <sub>H</sub>	30C <sub>H</sub>	000FFF0C <sub>H</sub>	54
LIN-USART 3 TX	61	3D			308 <sub>H</sub>	000FFF08 <sub>H</sub>	55
System Reserved	62	3E	ICR23 *3	457 <sub>H</sub>	304 <sub>H</sub>	000FFF04 <sub>H</sub>	—
Delayed Interrupt	63	3F			300 <sub>H</sub>	000FFF00 <sub>H</sub>	—
System Reserved *4	64	40	ICR24	458 <sub>H</sub>	2FC <sub>H</sub>	000FFEFC <sub>H</sub>	—
System Reserved *4	65	41			2F8 <sub>H</sub>	000FFEF8 <sub>H</sub>	—
LIN-USART (FIFO) 4 RX	66	42	ICR25	459 <sub>H</sub>	2F4 <sub>H</sub>	000FFEF4 <sub>H</sub>	10, 56
LIN-USART (FIFO) 4 TX	67	43			2F0 <sub>H</sub>	000FFEF0 <sub>H</sub>	11, 57
LIN-USART (FIFO) 5 RX	68	44	ICR26	45A <sub>H</sub>	2EC <sub>H</sub>	000FFEEC <sub>H</sub>	12, 58
LIN-USART (FIFO) 5 TX	69	45			2E8 <sub>H</sub>	000FFEE8 <sub>H</sub>	13, 59

# MB91460B Series

Interrupt	Interrupt number		Interrupt level *1		Interrupt vector *2		DMA Resource number
	Decimal	Hexa-decimal	Setting Register	Register address	Offset	Default vector address	
LIN-USART (FIFO) 6 RX	70	46	ICR27	45B <sub>H</sub>	2E4 <sub>H</sub>	000FFEE4 <sub>H</sub>	60
LIN-USART (FIFO) 6 TX	71	47			2E0 <sub>H</sub>	000FFEE0 <sub>H</sub>	61
LIN-USART (FIFO) 7 RX	72	48	ICR28	45C <sub>H</sub>	2DC <sub>H</sub>	000FFEDC <sub>H</sub>	62
LIN-USART (FIFO) 7 TX	73	49			2D8 <sub>H</sub>	000FFED8 <sub>H</sub>	63
I <sup>2</sup> C 0	74	4A	ICR29	45D <sub>H</sub>	2D4 <sub>H</sub>	000FFED4 <sub>H</sub>	—
I <sup>2</sup> C 1	75	4B			2D0 <sub>H</sub>	000FFED0 <sub>H</sub>	—
Reserved	76	4C	ICR30	45E <sub>H</sub>	2CC <sub>H</sub>	000FFECC <sub>H</sub>	64
Reserved	77	4D			2C8 <sub>H</sub>	000FFEC8 <sub>H</sub>	65
Reserved	78	4E	ICR31	45F <sub>H</sub>	2C4 <sub>H</sub>	000FFEC4 <sub>H</sub>	66
Reserved	79	4F			2C0 <sub>H</sub>	000FFEC0 <sub>H</sub>	67
Reserved	80	50	ICR32	460 <sub>H</sub>	2BC <sub>H</sub>	000FFEBC <sub>H</sub>	68
Reserved	81	51			2B8 <sub>H</sub>	000FFEB8 <sub>H</sub>	69
Reserved	82	52	ICR33	461 <sub>H</sub>	2B4 <sub>H</sub>	000FFEB4 <sub>H</sub>	70
Reserved	83	53			2B0 <sub>H</sub>	000FFEB0 <sub>H</sub>	71
Reserved	84	54	ICR34	462 <sub>H</sub>	2AC <sub>H</sub>	000FFEAC <sub>H</sub>	72
Reserved	85	55			2A8 <sub>H</sub>	000FFEA8 <sub>H</sub>	73
Reserved	86	56	ICR35	463 <sub>H</sub>	2A4 <sub>H</sub>	000FFEA4 <sub>H</sub>	74
Reserved	87	57			2A0 <sub>H</sub>	000FFEA0 <sub>H</sub>	75
Reserved	88	58	ICR36	464 <sub>H</sub>	29C <sub>H</sub>	000FFE9C <sub>H</sub>	76
Reserved	89	59			298 <sub>H</sub>	000FFE98 <sub>H</sub>	77
Reserved	90	5A	ICR37	465 <sub>H</sub>	294 <sub>H</sub>	000FFE94 <sub>H</sub>	78
Reserved	91	5B			290 <sub>H</sub>	000FFE90 <sub>H</sub>	79
Input Capture 0	92	5C	ICR38	466 <sub>H</sub>	28C <sub>H</sub>	000FFE8C <sub>H</sub>	80
Input Capture 1	93	5D			288 <sub>H</sub>	000FFE88 <sub>H</sub>	81
Input Capture 2	94	5E	ICR39	467 <sub>H</sub>	284 <sub>H</sub>	000FFE84 <sub>H</sub>	82
Input Capture 3	95	5F			280 <sub>H</sub>	000FFE80 <sub>H</sub>	83
Input Capture 4	96	60	ICR40	468 <sub>H</sub>	27C <sub>H</sub>	000FFE7C <sub>H</sub>	84
Input Capture 5	97	61			278 <sub>H</sub>	000FFE78 <sub>H</sub>	85
Input Capture 6	98	62	ICR41	469 <sub>H</sub>	274 <sub>H</sub>	000FFE74 <sub>H</sub>	86
Input Capture 7	99	63			270 <sub>H</sub>	000FFE70 <sub>H</sub>	87
Output Compare 0	100	64	ICR42	46A <sub>H</sub>	26C <sub>H</sub>	000FFE6C <sub>H</sub>	88
Output Compare 1	101	65			268 <sub>H</sub>	000FFE68 <sub>H</sub>	89
Output Compare 2	102	66	ICR43	46B <sub>H</sub>	264 <sub>H</sub>	000FFE64 <sub>H</sub>	90
Output Compare 3	103	67			260 <sub>H</sub>	000FFE60 <sub>H</sub>	91

# MB91460B Series

Interrupt	Interrupt number		Interrupt level *1		Interrupt vector *2		DMA Resource number
	Decimal	Hexa-decimal	Setting Register	Register address	Offset	Default vector address	
Output Compare 4	104	68	ICR44	46C <sub>H</sub>	25C <sub>H</sub>	000FFE5C <sub>H</sub>	92
Output Compare 5	105	69			258 <sub>H</sub>	000FFE58 <sub>H</sub>	93
Output Compare 6	106	6A	ICR45	46D <sub>H</sub>	254 <sub>H</sub>	000FFE54 <sub>H</sub>	94
Output Compare 7	107	6B			250 <sub>H</sub>	000FFE50 <sub>H</sub>	95
Sound Generator	108	6C	ICR46	46E <sub>H</sub>	24C <sub>H</sub>	000FFE4C <sub>H</sub>	—
Reserved	109	6D			248 <sub>H</sub>	000FFE48 <sub>H</sub>	—
System Reserved	110	6E	ICR47 *3	46F <sub>H</sub>	244 <sub>H</sub>	000FFE44 <sub>H</sub>	—
System Reserved	111	6F			240 <sub>H</sub>	000FFE40 <sub>H</sub>	—
PPG 0	112	70	ICR48	470 <sub>H</sub>	23C <sub>H</sub>	000FFE3C <sub>H</sub>	15, 96
PPG 1	113	71			238 <sub>H</sub>	000FFE38 <sub>H</sub>	97
PPG 2	114	72	ICR49	471 <sub>H</sub>	234 <sub>H</sub>	000FFE34 <sub>H</sub>	98
PPG 3	115	73			230 <sub>H</sub>	000FFE30 <sub>H</sub>	99
PPG 4	116	74	ICR50	472 <sub>H</sub>	22C <sub>H</sub>	000FFE2C <sub>H</sub>	100
PPG 5	117	75			228 <sub>H</sub>	000FFE28 <sub>H</sub>	101
PPG 6	118	76	ICR51	473 <sub>H</sub>	224 <sub>H</sub>	000FFE24 <sub>H</sub>	102
PPG 7	119	77			220 <sub>H</sub>	000FFE20 <sub>H</sub>	103
PPG 8	120	78	ICR52	474 <sub>H</sub>	21C <sub>H</sub>	000FFE1C <sub>H</sub>	104
PPG 9	121	79			218 <sub>H</sub>	000FFE18 <sub>H</sub>	105
PPG 10	122	7A	ICR53	475 <sub>H</sub>	214 <sub>H</sub>	000FFE14 <sub>H</sub>	106
PPG 11	123	7B			210 <sub>H</sub>	000FFE10 <sub>H</sub>	107
PPG 12	124	7C	ICR54	476 <sub>H</sub>	20C <sub>H</sub>	000FFE0C <sub>H</sub>	108
PPG 13	125	7D			208 <sub>H</sub>	000FFE08 <sub>H</sub>	109
PPG 14	126	7E	ICR55	477 <sub>H</sub>	204 <sub>H</sub>	000FFE04 <sub>H</sub>	110
PPG 15	127	7F			200 <sub>H</sub>	000FFE00 <sub>H</sub>	111
Up/Down Counter 0	128	80	ICR56	478 <sub>H</sub>	1FC <sub>H</sub>	000FFDFC <sub>H</sub>	—
Up/Down Counter 1	129	81			1F8 <sub>H</sub>	000FFDF8 <sub>H</sub>	—
Reserved	130	82	ICR57	479 <sub>H</sub>	1F4 <sub>H</sub>	000FFDF4 <sub>H</sub>	—
Reserved	131	83			1F0 <sub>H</sub>	000FFDF0 <sub>H</sub>	—
Real Time Clock	132	84	ICR58	47A <sub>H</sub>	1EC <sub>H</sub>	000FFDEC <sub>H</sub>	—
Calibration Unit	133	85			1E8 <sub>H</sub>	000FFDE8 <sub>H</sub>	—
A/D Converter 0	134	86	ICR59	47B <sub>H</sub>	1E4 <sub>H</sub>	000FFDE4 <sub>H</sub>	14, 112
System reserved	135	87			1E0 <sub>H</sub>	000FFDE0 <sub>H</sub>	—
Alarm Comparator 0	136	88	ICR60	47C <sub>H</sub>	1DC <sub>H</sub>	000FFDDC <sub>H</sub>	—
Reserved	137	89			1D8 <sub>H</sub>	000FFDD8 <sub>H</sub>	—

Interrupt	Interrupt number		Interrupt level *1		Interrupt vector *2		DMA Resource number
	Decimal	Hexa-decimal	Setting Register	Register address	Offset	Default vector address	
Low Voltage Detection	138	8A	ICR61	47D <sub>H</sub>	1D4 <sub>H</sub>	000FFDD4 <sub>H</sub>	—
Reserved	139	8B			1D0 <sub>H</sub>	000FFDD0 <sub>H</sub>	—
Time base Overflow	140	8C	ICR62	47E <sub>H</sub>	1CC <sub>H</sub>	000FFDCC <sub>H</sub>	—
PLL Clock Gear	141	8D			1C8 <sub>H</sub>	000FFDC8 <sub>H</sub>	—
DMA Controller	142	8E	ICR63	47F <sub>H</sub>	1C4 <sub>H</sub>	000FFDC4 <sub>H</sub>	—
Main/Sub OSC stability wait	143	8F			1C0 <sub>H</sub>	000FFDC0 <sub>H</sub>	—
Security vector	144	90	—	—	1BC <sub>H</sub>	000FFDBC <sub>H</sub>	—
Used by the INT instruction.	145 to 255	91 to FF	—	—	1B8 <sub>H</sub> to 000 <sub>H</sub>	000FFDB8 <sub>H</sub> to 000FFC00 <sub>H</sub>	—

\*1 : The Interrupt Control Registers (ICRs) are located in the interrupt controller and set the interrupt level for each interrupt request. An ICR is provided for each interrupt request.

\*2 : The vector address for each EIT (exception, interrupt or trap) is calculated by adding the listed offset to the table base register value (TBR) . The TBR specifies the top of the EIT vector table. The addresses listed in the table are for the default TBR value (000FFC00<sub>H</sub>) . The TBR is initialized to this value by a reset. The TBR is set to 000FFC00<sub>H</sub> after the internal boot ROM is executed.

\*3 : ICR23 and ICR47 can be exchanged by setting the REALOS compatibility bit (addr 0C03<sub>H</sub> : IOS[0])

\*4 : Used by REALOS

\*5 : Memory Protection Unit (MPU) support

# MB91460B Series

## ■ RECOMMENDED SETTINGS

### 1. PLL and Clockgear settings

Please note that for MB91F467BA/466BA and MB91F465BB/464BB the core base clock frequencies are valid in the 1.8V operation mode of the Main regulator and Flash.

Recommended PLL divider and clockgear settings

PLL Input (CLK) [MHz]	Frequency Parameter		Clockgear Parameter		PLL Output (X) [MHz]	Core Base Clock [MHz]	Remarks
	DIVM	DIVN	DIVG	MULG			
4	2	25	16	24	200	100	Not on MB91F467B A/466BA
4	2	24	16	24	192	96	
4	2	23	16	24	184	92	
4	2	22	16	24	176	88	
4	2	21	16	20	168	84	
4	2	20	16	20	160	80	
4	2	19	16	20	152	76	
4	2	18	16	20	144	72	
4	2	17	16	16	136	68	
4	2	16	16	16	128	64	
4	2	15	16	16	120	60	
4	2	14	16	16	112	56	
4	2	13	16	12	104	52	
4	2	12	16	12	96	48	
4	2	11	16	12	88	44	
4	4	10	16	24	160	40	
4	4	9	16	24	144	36	
4	4	8	16	24	128	32	
4	4	7	16	24	112	28	
4	6	6	16	24	144	24	
4	8	5	16	28	160	20	
4	10	4	16	32	160	16	
4	12	3	16	32	144	12	

## 2. Clock Modulator settings

The following table shows all possible settings for the Clock Modulator in a base clock frequency range from 32MHz up to 88MHz.

The Flash access time settings need to be adjusted according to Fmax while the PLL and clockgear settings should be set according to base clock frequency.

**Clock Modulator settings, frequency range and supported supply voltage**

Modulation Degree (k)	Random No (N)	CMPR [hex]	Baseclk [MHz]	Fmin [MHz]	Fmax [MHz]
1	3	026F	88	79.5	98.5 Not on MB91F467BA/ 466BA
1	3	026F	84	76.1	93.8
1	3	026F	80	72.6	89.1
1	5	02AE	80	68.7	95.8
2	3	046E	80	68.7	95.8
1	3	026F	76	69.1	84.5
1	5	02AE	76	65.3	90.8
1	7	02ED	76	62	98.1 Not on MB91F467BA/ 466BA
2	3	046E	76	65.3	90.8
3	3	066D	76	62	98.1 Not on MB91F467BA/ 466BA
1	3	026F	72	65.5	79.9
1	5	02AE	72	62	85.8
1	7	02ED	72	58.8	92.7
2	3	046E	72	62	85.8
3	3	066D	72	58.8	92.7
1	3	026F	68	62	75.3
1	5	02AE	68	58.7	80.9
1	7	02ED	68	55.7	87.3
1	9	032C	68	53	95
2	3	046E	68	58.7	80.9
2	5	04AC	68	53	95
3	3	066D	68	55.7	87.3
4	3	086C	68	53	95
1	3	026F	64	58.5	70.7
1	5	02AE	64	55.3	75.9
1	7	02ED	64	52.5	82

# MB91460B Series

Modulation Degree (k)	Random No (N)	CMPR [hex]	Baseclk [MHz]	Fmin [MHz]	Fmax [MHz]
1	9	032C	64	49.9	89.1
1	11	036B	64	47.6	97.6 Not on MB91F467BA/ 466BA
2	3	046E	64	55.3	75.9
2	5	04AC	64	49.9	89.1
3	3	066D	64	52.5	82
4	3	086C	64	49.9	89.1
5	3	0A6B	64	47.6	97.6 Not on MB91F467BA/ 466BA
1	3	026F	60	54.9	66.1
1	5	02AE	60	51.9	71
1	7	02ED	60	49.3	76.7
1	9	032C	60	46.9	83.3
1	11	036B	60	44.7	91.3
2	3	046E	60	51.9	71
2	5	04AC	60	46.9	83.3
3	3	066D	60	49.3	76.7
4	3	086C	60	46.9	83.3
5	3	0A6B	60	44.7	91.3
1	3	026F	56	51.4	61.6
1	5	02AE	56	48.6	66.1
1	7	02ED	56	46.1	71.4
1	9	032C	56	43.8	77.6
1	11	036B	56	41.8	84.9
1	13	03AA	56	39.9	93.8
2	3	046E	56	48.6	66.1
2	5	04AC	56	43.8	77.6
2	7	04EA	56	39.9	93.8
3	3	066D	56	46.1	71.4
3	5	06AA	56	39.9	93.8
4	3	086C	56	43.8	77.6
5	3	0A6B	56	41.8	84.9
6	3	0C6A	56	39.9	93.8
1	3	026F	52	47.8	57
1	5	02AE	52	45.2	61.2

# MB91460B Series

Modulation Degree (k)	Random No (N)	CMPR [hex]	Baseclk [MHz]	Fmin [MHz]	Fmax [MHz]
1	7	02ED	52	42.9	66.1
1	9	032C	52	40.8	71.8
1	11	036B	52	38.8	78.6
1	13	03AA	52	37.1	86.8
1	15	03E9	52	35.5	96.9 Not on MB91F467BA/ 466BA
2	3	046E	52	45.2	61.2
2	5	04AC	52	40.8	71.8
2	7	04EA	52	37.1	86.8
3	3	066D	52	42.9	66.1
3	5	06AA	52	37.1	86.8
4	3	086C	52	40.8	71.8
5	3	0A6B	52	38.8	78.6
6	3	0C6A	52	37.1	86.8
7	3	0E69	52	35.5	96.9 Not on MB91F467BA/ 466BA
1	3	026F	48	44.2	52.5
1	5	02AE	48	41.8	56.4
1	7	02ED	48	39.6	60.9
1	9	032C	48	37.7	66.1
1	11	036B	48	35.9	72.3
1	13	03AA	48	34.3	79.9
1	15	03E9	48	32.8	89.1
2	3	046E	48	41.8	56.4
2	5	04AC	48	37.7	66.1
2	7	04EA	48	34.3	79.9
3	3	066D	48	39.6	60.9
3	5	06AA	48	34.3	79.9
4	3	086C	48	37.7	66.1
5	3	0A6B	48	35.9	72.3
6	3	0C6A	48	34.3	79.9
7	3	0E69	48	32.8	89.1
1	3	026F	44	40.6	48.1
1	5	02AE	44	38.4	51.6
1	7	02ED	44	36.4	55.7

# MB91460B Series

Modulation Degree (k)	Random No (N)	CMPR [hex]	Baseclk [MHz]	Fmin [MHz]	Fmax [MHz]
1	9	032C	44	34.6	60.4
1	11	036B	44	33	66.1
1	13	03AA	44	31.5	73
1	15	03E9	44	30.1	81.4
2	3	046E	44	38.4	51.6
2	5	04AC	44	34.6	60.4
2	7	04EA	44	31.5	73
2	9	0528	44	28.9	92.1
3	3	066D	44	36.4	55.7
3	5	06AA	44	31.5	73
4	3	086C	44	34.6	60.4
4	5	08A8	44	28.9	92.1
5	3	0A6B	44	33	66.1
6	3	0C6A	44	31.5	73
7	3	0E69	44	30.1	81.4
8	3	1068	44	28.9	92.1
1	3	026F	40	37	43.6
1	5	02AE	40	34.9	46.8
1	7	02ED	40	33.1	50.5
1	9	032C	40	31.5	54.8
1	11	036B	40	30	59.9
1	13	03AA	40	28.7	66.1
1	15	03E9	40	27.4	73.7
2	3	046E	40	34.9	46.8
2	5	04AC	40	31.5	54.8
2	7	04EA	40	28.7	66.1
2	9	0528	40	26.3	83.3
3	3	066D	40	33.1	50.5
3	5	06AA	40	28.7	66.1
3	7	06E7	40	25.3	95.8
4	3	086C	40	31.5	54.8
4	5	08A8	40	26.3	83.3
5	3	0A6B	40	30	59.9
6	3	0C6A	40	28.7	66.1
7	3	0E69	40	27.4	73.7
8	3	1068	40	26.3	83.3

# MB91460B Series

Modulation Degree (k)	Random No (N)	CMPR [hex]	Baseclk [MHz]	Fmin [MHz]	Fmax [MHz]
9	3	1267	40	25.3	95.8
1	3	026F	36	33.3	39.2
1	5	02AE	36	31.5	42
1	7	02ED	36	29.9	45.3
1	9	032C	36	28.4	49.2
1	11	036B	36	27.1	53.8
1	13	03AA	36	25.8	59.3
1	15	03E9	36	24.7	66.1
2	3	046E	36	31.5	42
2	5	04AC	36	28.4	49.2
2	7	04EA	36	25.8	59.3
2	9	0528	36	23.7	74.7
3	3	066D	36	29.9	45.3
3	5	06AA	36	25.8	59.3
3	7	06E7	36	22.8	85.8
4	3	086C	36	28.4	49.2
4	5	08A8	36	23.7	74.7
5	3	0A6B	36	27.1	53.8
6	3	0C6A	36	25.8	59.3
7	3	0E69	36	24.7	66.1
8	3	1068	36	23.7	74.7
9	3	1267	36	22.8	85.8
1	3	026F	32	29.7	34.7
1	5	02AE	32	28	37.3
1	7	02ED	32	26.6	40.2
1	9	032C	32	25.3	43.6
1	11	036B	32	24.1	47.7
1	13	03AA	32	23	52.5
1	15	03E9	32	22	58.6
2	3	046E	32	28	37.3
2	5	04AC	32	25.3	43.6
2	7	04EA	32	23	52.5
2	9	0528	32	21.1	66.1
2	11	0566	32	19.5	89.1
3	3	066D	32	26.6	40.2
3	5	06AA	32	23	52.5

# MB91460B Series

Modulation Degree (k)	Random No (N)	CMPR [hex]	Baseclk [MHz]	Fmin [MHz]	Fmax [MHz]
3	7	06E7	32	20.3	75.9
4	3	086C	32	25.3	43.6
4	5	08A8	32	21.1	66.1
5	3	0A6B	32	24.1	47.7
5	5	0AA6	32	19.5	89.1
6	3	0C6A	32	23	52.5
7	3	0E69	32	22	58.6
8	3	1068	32	21.1	66.1
9	3	1267	32	20.3	75.9
10	3	1466	32	19.5	89.1

## ■ ELECTRICAL CHARACTERISTICS

### 1. Absolute maximum ratings

Parameter	Symbol	Rating		Unit	Remarks
		Min	Max		
Power supply slew rate	—	—	50	V/ms	
Power supply voltage 1 <sup>*1</sup>	V <sub>DD5R</sub>	−0.3	+6.0	V	
Power supply voltage 2 <sup>*1</sup>	V <sub>DD5</sub>	−0.3	+6.0	V	
Relationship of the supply voltages	AV <sub>cc5</sub>	V <sub>DD5</sub> -0.3 V <sub>DD35</sub> -0.3	V <sub>DD5</sub> +0.3 V <sub>DD35</sub> +0.3	V	At least one pin of the Ports 26 to 29 (ANn) is used as digital input or output.
		V <sub>SS5</sub> -0.3 V <sub>DD35</sub> -0.3	V <sub>DD5</sub> +0.3 V <sub>DD35</sub> +0.3		All pins of the Ports 26 to 29 (ANn) follow the condition of V <sub>IA</sub>
Analog power supply voltage <sup>*1</sup>	AV <sub>cc5</sub>	−0.3	+6.0	V	<sup>*2</sup>
Analog reference power supply voltage <sup>*1</sup>	AVRH	−0.3	+6.0	V	<sup>*2</sup>
Input voltage 1 <sup>*1</sup>	V <sub>I1</sub>	V <sub>ss5</sub> − 0.3	V <sub>DD5</sub> + 0.3	V	
Analog pin input voltage <sup>*1</sup>	V <sub>IA</sub>	AV <sub>ss5</sub> − 0.3	AV <sub>cc5</sub> + 0.3	V	
Output voltage 1 <sup>*1</sup>	V <sub>O1</sub>	V <sub>ss5</sub> − 0.3	V <sub>DD5</sub> + 0.3	V	
Maximum clamp current	I <sub>CLAMP</sub>	−4.0	+4.0	mA	<sup>*3</sup>
Total maximum clamp current	Σ  I <sub>CLAMP</sub>	—	20	mA	<sup>*3</sup>
“L” level maximum output current <sup>*4</sup>	I <sub>OL</sub>	—	10	mA	
“L” level average output current <sup>*5</sup>	I <sub>OLAV</sub>	—	8	mA	
“L” level total maximum output current	Σ I <sub>OL</sub>	—	100	mA	
“L” level total average output current <sup>*6</sup>	Σ I <sub>OLAV</sub>	—	50	mA	
“H” level maximum output current <sup>*4</sup>	I <sub>OH</sub>	—	−10	mA	
“H” level average output current <sup>*5</sup>	I <sub>OHAV</sub>	—	−4	mA	
“H” level total maximum output current	Σ I <sub>OH</sub>	—	−100	mA	
“H” level total average output current <sup>*6</sup>	Σ I <sub>OHAV</sub>	—	−25	mA	
Permitted operating frequency MB91F465BB/F464BB	f <sub>max, CLKB</sub>	—	100	MHz	T <sub>A</sub> ≤ 105 °C
	f <sub>max, CLKP</sub>	—	50		
	f <sub>max, CLKT</sub>	—	50		
	f <sub>max, CLKCAN</sub>	—	50		

# MB91460B Series

Parameter	Symbol	Rating		Unit	Remarks
		Min	Max		
Permitted operating frequency MB91F465BB/F464BB	$f_{max, CLKB}$	—	96	MHz	$T_A \leq 125^\circ C$
	$f_{max, CLKP}$	—	48		
	$f_{max, CLKT}$	—	48		
	$f_{max, CLKCAN}$	—	48		
Permitted operating frequency MB91F467BA/F466BA	$f_{max, CLKB}$	—	96	MHz	$T_A \leq 105^\circ C$
	$f_{max, CLKP}$	—	48		
	$f_{max, CLKT}$	—	48		
	$f_{max, CLKCAN}$	—	48		
Permitted operating frequency MB91F467BA/F466BA	$f_{max, CLKB}$	—	92	MHz	$T_A \leq 125^\circ C$
	$f_{max, CLKP}$	—	46		
	$f_{max, CLKT}$	—	46		
	$f_{max, CLKCAN}$	—	46		
Permitted power dissipation <sup>7</sup>	$P_D$	—	1200 <sup>8</sup>	mW	$T_A \leq 85^\circ C$
		—	600 <sup>8</sup>	mW	$T_A \leq 105^\circ C$
		—	1300 <sup>8</sup>	mW	$T_A \leq 105^\circ C$ , no Flash program/erase <sup>9</sup>
		—	1000 <sup>8</sup>	mW	$T_A \leq 115^\circ C$ , no Flash program/erase <sup>9</sup>
		—	750 <sup>8</sup>	mW	$T_A \leq 125^\circ C$ , no Flash program/erase <sup>9</sup>
Operating temperature	$T_A$	-40	+125	°C	
Storage temperature	$T_{stg}$	-55	+150	°C	

\*1 : The parameter is based on  $V_{SS5} = AV_{SS5} = 0.0 V$ .


\*2 :  $AV_{CC5}$  and  $AVRH5$  must not exceed  $V_{DD5} + 0.3 V$ .

\*3 : • Use within recommended operating conditions.

- Use with DC voltage (current).
- +B signals are input signals that exceed the  $V_{DD5}$  voltage. +B signals should always be applied by connecting a limiting resistor between the +B signal and the microcontroller.
- The value of the limiting resistor should be set so that the current input to the microcontroller pin does not exceed the rated value at any time, either instantaneously or for an extended period, when the +B signal is input.
- Note that when the microcontroller drive current is low, such as in the low power consumption modes, the +B input potential can increase the potential at the power supply pin via a protective diode, possibly affecting other devices.
- Note that if the +B signal is input when the microcontroller is off (not fixed at 0 V), power is supplied through the +B input pin; therefore, the microcontroller may partially operate.
- Note that if the +B signal is input at power-on, since the power is supplied through the pin, the power-on reset may not function in the power supply voltage.

- Do not leave +B input pins open.
- Example of recommended circuit :

- Input/output equivalent circuit

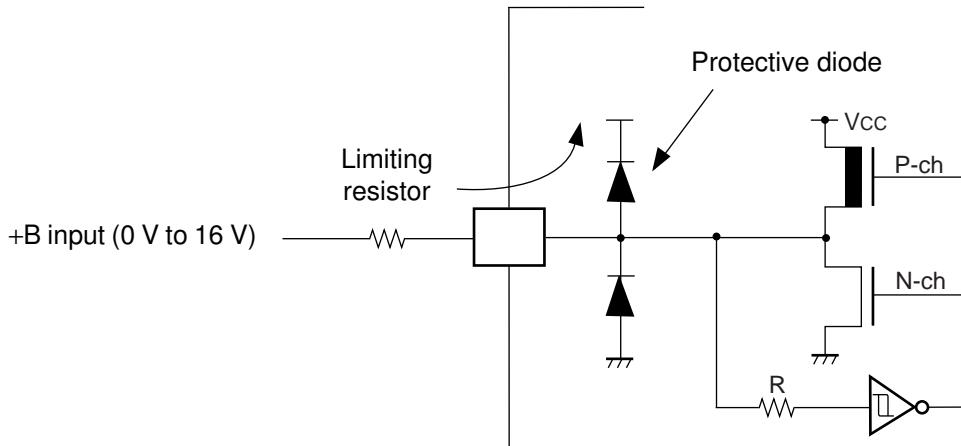

\*4 : Maximum output current is defined as the value of the peak current flowing through any one of the corresponding pins.

\*5 : Average output current is defined as the value of the average current flowing through any one of the corresponding pins for a 100 ms period.

\*6 : Total average output current is defined as the value of the average current flowing through all of the corresponding pins for a 100 ms period.

\*7 : The maximum permitted power dissipation depends on the ambient temperature, the air flow velocity and the thermal conductance of the package on the PCB.

The actual power dissipation depends on the customer application and can be calculated as follows:

$$P_D = P_{IO} + P_{INT}$$

$P_{IO} = \sum (V_{OL} * I_{OL} + V_{OH} * I_{OH})$  (IO load power dissipation, sum is performed on all IO ports)

$P_{INT} = V_{DD5R} * I_{CC} + AV_{CC5} * I_A + AVR_{H5} * I_R$  (internal power dissipation)

\*8 : Worst case value for the QFP package mounted on a 4-layer PCB at specified  $T_A$  without air flow.

\*9 : Please contact Fujitsu for reliability limitations when using under these conditions.

**WARNING:** Semiconductor devices can be permanently damaged by application of stress (voltage, current, temperature, etc.) in excess of absolute maximum ratings. Do not exceed these ratings.

# MB91460B Series

## 2. Recommended operating conditions


(V<sub>SS5</sub> = AV<sub>SS5</sub> = 0.0 V)

Parameter	Symbol	Value			Unit	Remarks
		Min	Typ	Max		
Power supply voltage	V <sub>DD5</sub>	3.0	—	5.5	V	
	V <sub>DD5R</sub>	3.0	—	5.5	V	Internal regulator
	AV <sub>CC5</sub>	3.0	—	5.5	V	A/D converter
Smoothing capacitor at VCC18C pin	C <sub>s</sub>	—	4.7	—	μF	Use a X7R ceramic capacitor or a capacitor that has similar frequency characteristics.
Power supply slew rate		—	—	50	V/ms	
Operating temperature	T <sub>A</sub>	– 40	—	+ 125	°C	
Main Oscillation stabilisation time		10			ms	
Lock-up time PLL (4 MHz → 16 ... 100MHz)				0.6	ms	
ESD Protection (Human body model)	V <sub>surge</sub>	2			kV	R <sub>discharge</sub> = 1.5kΩ C <sub>discharge</sub> = 100pF
RC Oscillator	f <sub>RC100kHz</sub> f <sub>RC2MHz</sub>	50 1	100 2	200 4	kHz MHz	V <sub>DDCORE</sub> ≥ 1.65V

**WARNING:** The recommended operating conditions are required in order to ensure the normal operation of the semiconductor device. All of the device's electrical characteristics are warranted when the device is operated within these ranges.

Always use semiconductor devices within their recommended operating condition ranges. Operation outside these ranges may adversely affect reliability and could result in device failure.

No warranty is made with respect to uses, operating conditions, or combinations not represented on the data sheet. Users considering application outside the listed conditions are advised to contact their representatives beforehand.

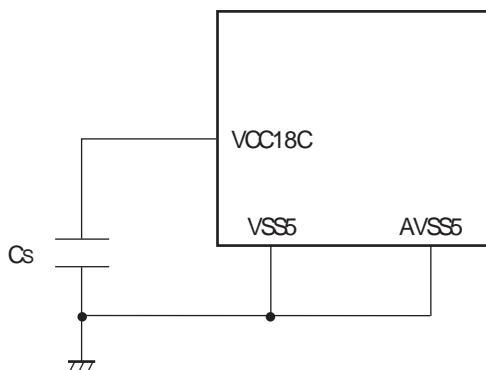

### 3. DC characteristics

( $V_{DD5} = AV_{CC5} = 3.0\text{ V}$  to  $5.5\text{ V}$ ,  $V_{SS5} = AV_{SS5} = 0\text{ V}$ ,  $T_A = -40^\circ\text{C}$  to  $+125^\circ\text{C}$ )

Parameter	Symbol	Pin name	Condition	Value			Unit	Remarks
				Min	Typ	Max		
Input "H" voltage	$V_{IH}$	—	Port inputs if CMOS Hysteresis 0.8/0.2 input is selected	$0.8 \times V_{DD}$	—	$V_{DD} + 0.3$	V	CMOS hysteresis input
		—	Port inputs if CMOS Hysteresis 0.7/0.3 input is selected	$0.7 \times V_{DD}$	—	$V_{DD} + 0.3$	V	$4.5\text{ V} \leq V_{DD} \leq 5.5\text{ V}$
		—	AUTOMOTIVE Hysteresis input is selected	$0.74 \times V_{DD}$	—	$V_{DD} + 0.3$	V	$3\text{ V} \leq V_{DD} < 4.5\text{ V}$
		—	Port inputs if TTL input is selected	2.0	—	$V_{DD} + 0.3$	V	
	$V_{IHR}$	INITX	—	$0.8 \times V_{DD}$	—	$V_{DD} + 0.3$	V	INITX input pin (CMOS Hysteresis)
	$V_{IHM}$	MD_3 to MD_0	—	$V_{DD} - 0.3$	—	$V_{DD} + 0.3$	V	Mode input pins
	$V_{IHXOS}$	X0, X0A	—	2.5	—	$V_{DD} + 0.3$	V	External clock in "Oscillation mode"
Input "L" voltage	$V_{IL}$	—	Port inputs if CMOS Hysteresis 0.8/0.2 input is selected	$V_{SS} - 0.3$	—	$0.2 \times V_{DD}$	V	
		—	Port inputs if CMOS Hysteresis 0.7/0.3 input is selected	$V_{SS} - 0.3$	—	$0.3 \times V_{DD}$	V	
		—	Port inputs if AUTOMOTIVE Hysteresis input is selected	$V_{SS} - 0.3$	—	$0.5 \times V_{DD}$	V	$4.5\text{ V} \leq V_{DD} \leq 5.5\text{ V}$
		—	Port inputs if TTL input is selected	$V_{SS} - 0.3$	—	0.46 $\times V_{DD}$	V	$3\text{ V} \leq V_{DD} < 4.5\text{ V}$
	$V_{ILR}$	INITX	—	$V_{SS} - 0.3$	—	$0.2 \times V_{DD}$	V	INITX input pin (CMOS Hysteresis)
	$V_{ILM}$	MD_3 to MD_0	—	$V_{SS} - 0.3$	—	$V_{SS} + 0.3$	V	Mode input pins
	$V_{ILXDS}$	X0, X0A	—	$V_{SS} - 0.3$	—	0.5	V	External clock in "Oscillation mode"

# MB91460B Series

Parameter	Symbol	Pin name	Condition	Value			Unit	Remarks
				Min	Typ	Max		
Input "L" voltage	V <sub>ILXDF</sub>	X0	—	V <sub>SS</sub> – 0.3	—	0.2 × V <sub>DD</sub>	V	External clock in "Fast Clock Input mode"
Output "H" voltage	V <sub>OH2</sub>	Normal outputs	4.5V ≤ V <sub>DD</sub> ≤ 5.5V, I <sub>OH</sub> = – 2mA	V <sub>DD</sub> – 0.5	—	—	V	Driving strength set to 2 mA
			3.0V ≤ V <sub>DD</sub> ≤ 4.5V, I <sub>OH</sub> = – 1.6mA					
	V <sub>OH5</sub>	Normal outputs	4.5V ≤ V <sub>DD</sub> ≤ 5.5V, I <sub>OH</sub> = – 5mA	V <sub>DD</sub> – 0.5	—	—	V	Driving strength set to 5 mA
			3.0V ≤ V <sub>DD</sub> ≤ 4.5V, I <sub>OH</sub> = – 3mA					
	V <sub>OH3</sub>	I <sup>2</sup> C outputs	3.0V ≤ V <sub>DD</sub> ≤ 5.5V, I <sub>OH</sub> = – 3mA	V <sub>DD</sub> – 0.5	—	—	V	
Output "L" voltage	V <sub>OL2</sub>	Normal outputs	4.5V ≤ V <sub>DD</sub> ≤ 5.5V, I <sub>OH</sub> = + 2mA	—	—	0.4	V	Driving strength set to 2 mA
			3.0V ≤ V <sub>DD</sub> ≤ 4.5V, I <sub>OH</sub> = + 1.6mA					
	V <sub>OL5</sub>	Normal outputs	4.5V ≤ V <sub>DD</sub> ≤ 5.5V, I <sub>OH</sub> = + 5mA	—	—	0.4	V	Driving strength set to 5 mA
			3.0V ≤ V <sub>DD</sub> ≤ 4.5V, I <sub>OH</sub> = + 3mA					
	V <sub>OL3</sub>	I <sup>2</sup> C outputs	3.0V ≤ V <sub>DD</sub> ≤ 5.5V, I <sub>OH</sub> = + 3mA	—	—	0.4	V	
Input leakage current	I <sub>IL</sub>	Pnn_m <sup>*1</sup>	3.0V ≤ V <sub>DD</sub> ≤ 5.5V V <sub>SS5</sub> < V <sub>I</sub> < V <sub>DD</sub> T <sub>A</sub> =25 °C	– 1	—	+ 1	μA	
			3.0V ≤ V <sub>DD</sub> ≤ 5.5V V <sub>SS5</sub> < V <sub>I</sub> < V <sub>DD</sub> T <sub>A</sub> =125 °C	– 3	—	+ 3		
Analog input leakage current	I <sub>AIN</sub>	ANn <sup>*2</sup>	3.0V ≤ V <sub>DD</sub> ≤ 5.5V T <sub>A</sub> =25 °C	– 1	—	+ 1	μA	
			3.0V ≤ V <sub>DD</sub> ≤ 5.5V T <sub>A</sub> =125 °C	– 3	—	+ 3	μA	
Pull-up resistance	R <sub>UP</sub>	Pnn_m <sup>*3</sup>	3.0V ≤ V <sub>DD</sub> ≤ 3.6V	40	100	160	kΩ	
		INITX	4.5V ≤ V <sub>DD</sub> ≤ 5.5V	25	50	100		
Pull-down resistance	R <sub>DOWN</sub>	Pnn_m <sup>*4</sup>	3.0V ≤ V <sub>DD</sub> ≤ 3.6V	40	100	180	kΩ	
			4.5V ≤ V <sub>DD</sub> ≤ 5.5V	25	50	100		

# MB91460B Series

Parameter	Symbol	Pin name	Condition	Value			Unit	Remarks
				Min	Typ	Max		
Input capacitance	C <sub>IN</sub>	All except V <sub>DD5</sub> , V <sub>DD5R</sub> , V <sub>SS5</sub> , AV <sub>CC5</sub> , AV <sub>SS5</sub> , AVR <sub>H5</sub>	f = 1 MHz	-	5	15	pF	
Power supply current F467BA F466BA	I <sub>CC</sub>	V <sub>DD5R</sub>	CLKB: 96 MHz CLKP: 48 MHz CLKT: 48 MHz CLKCAN: 48 MHz	—	120	150	mA	Code fetch from Flash
	I <sub>CCH</sub>	V <sub>DD5R</sub>	T <sub>A</sub> = + 25 °C	—	30	150	μA	At stop mode *5
			T <sub>A</sub> = + 105 °C	—	0.4	2.0	mA	
			T <sub>A</sub> = + 125 °C	—	1.0	5.0	mA	
			T <sub>A</sub> = + 25 °C	—	100	500	μA	RTC : 4 MHz mode *5
			T <sub>A</sub> = + 105 °C	—	0.5	2.4	mA	
			T <sub>A</sub> = + 125 °C	—	1.1	5.4	mA	
			T <sub>A</sub> = + 25 °C	—	50	250	μA	RTC : 100 kHz mode *5
			T <sub>A</sub> = + 105 °C	—	0.45	2.2	mA	
			T <sub>A</sub> = + 125 °C	—	1.05	5.2	mA	
	I <sub>LVE</sub>	V <sub>DD5</sub>	—	—	70	150	μA	External low voltage detection
	I <sub>LVVI</sub>	V <sub>DD5R</sub>	—	—	50	100	μA	Internal low voltage detection
	I <sub>OSC</sub>	V <sub>DD5</sub>	—	—	250	500	μA	Main clock (4 MHz)
			—	—	20	40	μA	Sub clock (32 kHz)

# MB91460B Series

Parameter	Symbol	Pin name	Condition	Value			Unit	Remarks
				Min	Typ	Max		
Power supply current F465BB F464BB	I <sub>CC</sub>	V <sub>DD5R</sub>	CLKB: 100 MHz CLKP: 50 MHz CLKT: 50 MHz CLKCAN: 50 MHz	-	110	140	mA	Code fetch from Flash
	I <sub>CCH</sub>	V <sub>DD5R</sub>	T <sub>A</sub> = + 25 °C	-	30	150	µA	At stop mode <sup>*5</sup>
			T <sub>A</sub> = + 105 °C	-	0.3	2.0	mA	
			T <sub>A</sub> = + 125 °C	-	0.75	5.0	mA	
			T <sub>A</sub> = + 25 °C	-	100	500	µA	RTC : 4 MHz mode <sup>*5</sup>
			T <sub>A</sub> = + 105 °C	-	0.5	2.4	mA	
			T <sub>A</sub> = + 125 °C	-	0.85	5.4	mA	
			T <sub>A</sub> = + 25 °C	-	50	250	µA	RTC : 100 kHz mode <sup>*5</sup>
			T <sub>A</sub> = + 105 °C	-	0.4	2.2	mA	
			T <sub>A</sub> = + 125 °C	-	0.8	5.2	mA	
	I <sub>LV</sub> E	V <sub>DD5</sub>	—	—	70	150	µA	External low voltage detection
	I <sub>LV</sub> I	V <sub>DD5R</sub>	—	—	50	100	µA	Internal low voltage detection
	I <sub>osc</sub>	V <sub>DD5</sub>	—	—	250	500	µA	Main clock (4 MHz)
			—	—	20	40	µA	Sub clock (32 kHz)

1. Pnn\_m includes all GPIO pins. Analog (AN) channels and PullUp/PullDown are disabled.
2. ANn includes all pins where AN channels are enabled.
3. Pnn\_m includes all GPIO pins. The pull up resistors must be enabled by PPER/PPCR setting and the pins must be in input direction.
4. Pnn\_m includes all GPIO pins. The pull down resistors must be enabled by PPER/PPCR setting and the pins must be in input direction.
5. Main regulator OFF, sub regulator set to 1.2V, Low voltage detection disabled.

## 4. A/D converter characteristics

( $V_{DD5} = AV_{CC5} = 3.0\text{ V}$  to  $5.5\text{ V}$ ,  $V_{SS5} = AV_{SS5} = 0\text{ V}$ ,  $T_A = -40^\circ\text{C}$  to  $+125^\circ\text{C}$ )

Parameter	Symbol	Pin name	Value			Unit	Remarks
			Min	Typ	Max		
Resolution	—	—	—	—	10	bit	
Total error	—	—	-3	—	+3	LSB	
Nonlinearity error	—	—	-2.5	—	+2.5	LSB	
Differential nonlinearity error	—	—	-1.9	—	+1.9	LSB	
Zero reading voltage	$V_{OT}$	ANn	AVRL-1.5 LSB	AVRL+0.5 LSB	AVRL+2.5 LSB	v	
Full scale reading voltage	$V_{FST}$	ANn	AVRH-3.5 LSB	AVRH-1.5 LSB	AVRH+0.5 LSB	v	
Compare time	$T_{comp}$	—	0.6	—	16,500	$\mu\text{s}$	$4.5\text{ V} \leq AV_{CC5} \leq 5.5\text{ V}$
			2.0	—	—	$\mu\text{s}$	$3.0\text{ V} \leq AV_{CC5} \leq 4.5\text{ V}$
Sampling time	$T_{samp}$	—	0.4	—	—	$\mu\text{s}$	$4.5\text{ V} \leq AV_{CC5} \leq 5.5\text{ V}$ , $R_{EXT} < 2\text{ k}\Omega$
			1.0	—	—	$\mu\text{s}$	$3.0\text{ V} \leq AV_{CC5} \leq 4.5\text{ V}$ , $R_{EXT} < 1\text{ k}\Omega$
Conversion time	$T_{conv}$	—	1.0	—	—	$\mu\text{s}$	$4.5\text{ V} \leq AV_{CC5} \leq 5.5\text{ V}$
			3.0	—	—	$\mu\text{s}$	$3.0\text{ V} \leq AV_{CC5} \leq 4.5\text{ V}$
Input capacitance	$C_{IN}$	ANn	—	—	11	pF	
Input resistance	$R_{IN}$	ANn	—	—	2.6	$\text{k}\Omega$	$4.5\text{ V} \leq AV_{CC5} \leq 5.5\text{ V}$
			—	—	12.1	$\text{k}\Omega$	$3.0\text{ V} \leq AV_{CC5} \leq 4.5\text{ V}$
Analog input leakage current	$I_{AIN}$	ANn	-1	—	+1	$\mu\text{A}$	$T_A = +25^\circ\text{C}$
			-3	—	+3	$\mu\text{A}$	$T_A = +125^\circ\text{C}$
Analog input voltage range	$V_{AIN}$	ANn	AVRL	—	AVRH	v	
Offset between input channels	—	ANn	—	—	4	LSB	

(Continued)

Note : The accuracy gets worse as AVRH - AVRL becomes smaller

# MB91460B Series

(Continued)

Parameter	Symbol	Pin name	Value			Unit	Remarks
			Min	Typ	Max		
Reference voltage range	AVRH	AVRH5	0.75 × AV <sub>cc5</sub>	—	AV <sub>cc5</sub>	V	
	AVRL	AVss5	AV <sub>ss5</sub>	—	AV <sub>cc5</sub> × 0.25	V	
Power supply current per ADC macro * <sup>3</sup>	I <sub>A</sub>	AV <sub>cc5</sub>	—	2.5	5	mA	A/D Converter active
	I <sub>AH</sub>	AV <sub>cc5</sub>	—	—	5	μA	A/D Converter not operated * <sup>1</sup>
Reference voltage current per ADC macro * <sup>3</sup>	I <sub>R</sub>	AVRH5	—	0.7	1	mA	A/D Converter active
	I <sub>RH</sub>	AVRH5	—	—	5	μA	A/D Converter not operated * <sup>2</sup>

\*<sup>1</sup> : Supply current at AV<sub>cc5</sub>, if A/D converter and ALARM comparator are not operating,  
(V<sub>DD5</sub> = AV<sub>cc5</sub> = AVRH = 5.0 V)

\*<sup>2</sup> : Input current at AVRH5, if A/D converter is not operating, (V<sub>DD5</sub> = AV<sub>cc5</sub> = AVRH = 5.0 V)

\*<sup>3</sup> : The current consumption per ADC macro is given here. On devices having more than one A/D converter, the current values have to be multiplied by the number of macros.

## Sampling Time Calculation

$$T_{\text{samp}} = (2.6 \text{ kOhm} + R_{\text{EXT}}) \times 11\text{pF} \times 7; \text{ for } 4.5\text{V} \leq AV_{\text{cc5}} \leq 5.5\text{V}$$


$$T_{\text{samp}} = (12.1 \text{ kOhm} + R_{\text{EXT}}) \times 11\text{pF} \times 7; \text{ for } 3.0\text{V} \leq AV_{\text{cc5}} \leq 4.5\text{V}$$

## Conversion Time Calculation

$$T_{\text{conv}} = T_{\text{samp}} + T_{\text{comp}}$$

## Definition of A/D converter terms

- Resolution  
Analog variation that is recognizable by the A/D converter.
- Nonlinearity error  
Deviation between actual conversion characteristics and a straight line connecting the zero transition point (00 0000 0000<sub>B</sub> ↔ 00 0000 0001<sub>B</sub>) and the full scale transition point (11 1111 1110<sub>B</sub> ↔ 11 1111 1111<sub>B</sub>).
- Differential nonlinearity error  
Deviation of the input voltage from the ideal value that is required to change the output code by 1 LSB.
- Total error  
This error indicates the difference between actual and theoretical values, including the zero transition error, full scale transition error, and nonlinearity error.

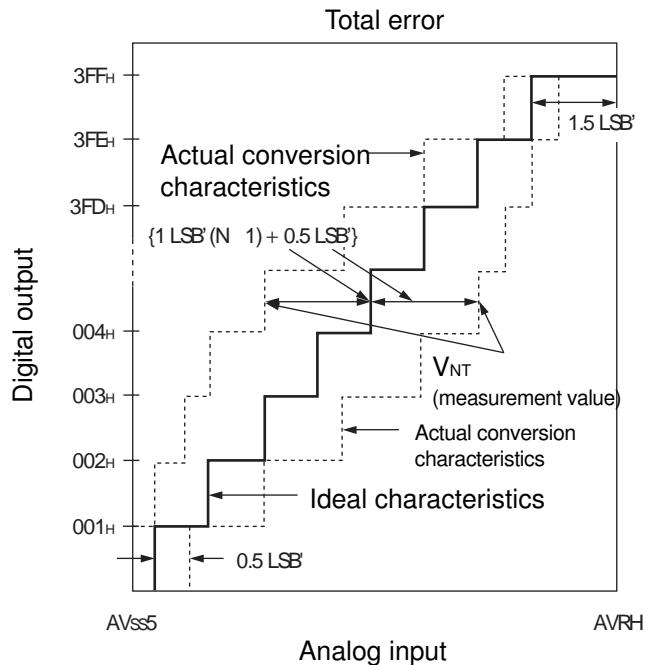

$$1 \text{ LSB}' (\text{ideal value}) = \frac{\text{AVRH} - \text{AVss5}}{1024} [\text{V}]$$

$$\text{Total error of digital output } N = \frac{V_{NT} - \{1 \text{ LSB}' \times (N - 1) + 0.5 \text{ LSB}'\}}{1 \text{ LSB}'} [\text{V}]$$

$N$  : A/D converter digital output value

$$V_{OT'} (\text{ideal value}) = \text{AVss5} + 0.5 \text{ LSB}' [\text{V}]$$


$$V_{FST'} (\text{ideal value}) = \text{AVRH} - 1.5 \text{ LSB}' [\text{V}]$$

$V_{NT}$  : Voltage at which the digital output changes from  $(N + 1)_H$  to  $N_H$

(Continued)

# MB91460B Series

(Continued)

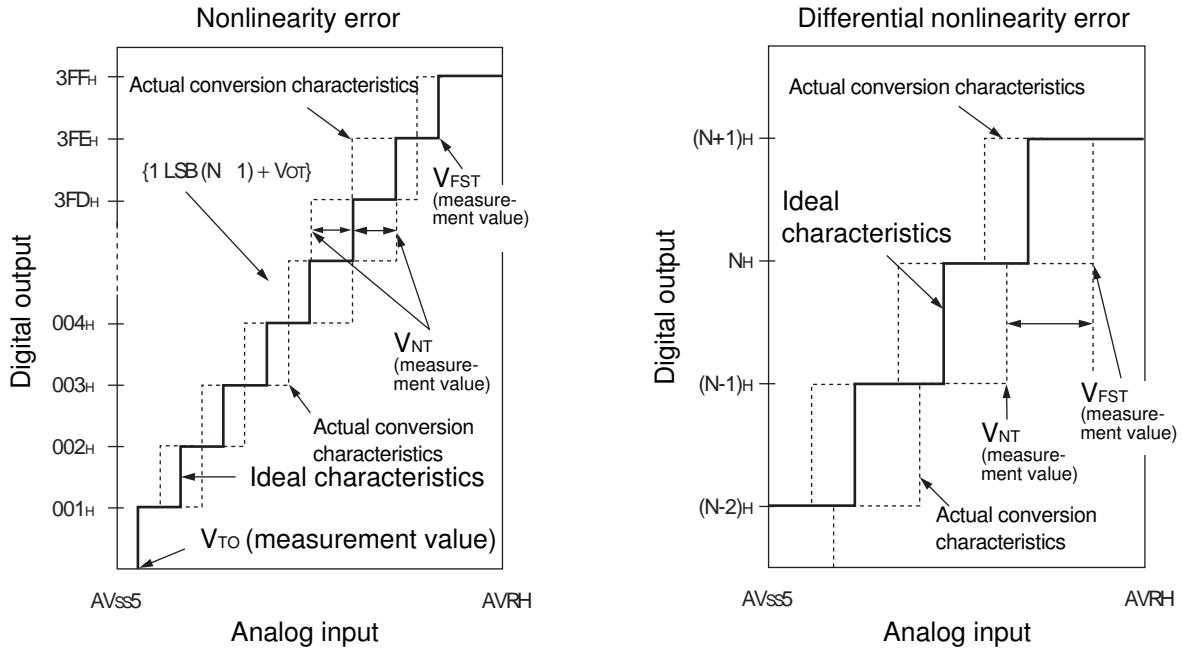

$$\text{Nonlinearity error of digital output } N = \frac{V_{NT} - \{1\text{LSB} \times (N - 1) + V_{OT}\}}{1\text{LSB}} \text{ [LSB]}$$

$$\text{Differential nonlinearity error of digital output } N = \frac{V_{(N+1)T} - V_{NT}}{1\text{LSB}} - 1 \text{ [LSB]}$$

$$1\text{LSB} = \frac{V_{FST} - V_{OT}}{1022} \text{ [V]}$$

N : A/D converter digital output value

V<sub>OT</sub> : Voltage at which the digital output changes from 000<sub>H</sub> to 001<sub>H</sub>.

V<sub>FST</sub> : Voltage at which the digital output changes from 3FE<sub>H</sub> to 3FF<sub>H</sub>.

## 5. Alarm comparator characteristics

Parameter	Symbol	Pin name	Value			Unit	Remarks
			Min	Typ	Max		
Power supply current	I <sub>A5ALMF</sub>	AV <sub>cc5</sub>	—	25	40	μA	Alarm comparator enabled in fast mode (per channel) * <sup>1</sup>
	I <sub>A5ALMS</sub>		—	7	10	μA	Alarm comparator enabled in normal mode (per channel) * <sup>1</sup>
	I <sub>A5ALMH</sub>		—	—	5	μA	Alarm comparator disabled
ALARM pin input current	I <sub>ALIN</sub>	ALARM_n	-1	—	+1	μA	T <sub>A</sub> =25 °C
ALARM pin input voltage range	V <sub>ALIN</sub>		-3	—	+3	μA	T <sub>A</sub> =125 °C
Alarm upper limit voltage	V <sub>IAH</sub>		0	—	AV <sub>cc5</sub>	V	
Alarm lower limit voltage	V <sub>IAL</sub>		AV <sub>cc5</sub> × 0.78 - 3%	AV <sub>cc5</sub> × 0.78	AV <sub>cc5</sub> × 0.78 + 3%	V	
Alarm hysteresis voltage	V <sub>IAHYS</sub>		AV <sub>cc5</sub> × 0.36 - 5%	AV <sub>cc5</sub> × 0.36	AV <sub>cc5</sub> × 0.36 + 5%	V	
Alarm input resistance	R <sub>IN</sub>		50	—	250	mV	
Comparion time	t <sub>COMPFF</sub>		5	—	—	MΩ	
	t <sub>COMPS</sub>		—	0.1	0.2	μs	Alarm comparator enabled in fast mode * <sup>1</sup>
			—	1	2	μs	Alarm comparator enabled in normal mode * <sup>1</sup>

Note: \*1 : The fast Alarm Comparator mode is enabled by setting ACSR.MD=1  
Setting ACSR.MD=0 sets the normal mode.

# MB91460B Series

## 6. FLASH memory program/erase characteristics

### 6.1. MB91F467BA/466BA

( $V_{DD5} = 3.0 \text{ V to } 5.5 \text{ V}$ ,  $V_{DD5R} = 3.0 \text{ V to } 5.5 \text{ V}$ ,  $V_{SS5} = 0 \text{ V}$ ,  $T_A = -40 \text{ }^\circ\text{C to } +105 \text{ }^\circ\text{C}$ )

Parameter	Value			Unit	Remarks
	Min	Typ	Max		
Sector erase time	-	0.5	2.0	s	Erasure programming time not included
Chip erase time	-	$n \cdot 0.5$	$n \cdot 2.0$	s	$n$ is the number of Flash sector of the device
Word (16-bit width) programming time	-	6	100	$\mu\text{s}$	System overhead time not included
Program/Erase cycle	10 000			cycle	
Flash data retention time	20			year	*1

\*1: This value was converted from the results of evaluating the reliability of the technology (using Arrhenius equation to convert high temperature measurements into normalized value at 85°C)

### 6.2. MB91F465BB/464BB

( $V_{DD5} = 3.0 \text{ V to } 5.5 \text{ V}$ ,  $V_{DD5R} = 3.0 \text{ V to } 5.5 \text{ V}$ ,  $V_{SS5} = 0 \text{ V}$ ,  $T_A = -40 \text{ }^\circ\text{C to } +105 \text{ }^\circ\text{C}$ )

Parameter	Value			Unit	Remarks
	Min	Typ	Max		
Sector erase time	-	0.9	3.6	s	Erasure programming time not included
Chip erase time	-	$n \cdot 0.9$	$n \cdot 3.6$	s	$n$ is the number of Flash sector of the device
Word (16-bit or 32-bit width) programming time	-	23	370	$\mu\text{s}$	System overhead time not included
Program/Erase cycle	10 000			cycle	
Flash data retention time	20			year	*1

\*1: This value was converted from the results of evaluating the reliability of the technology (using Arrhenius equation to convert high temperature measurements into normalized value at 85°C)


## 7. AC characteristics

### 7.1. Clock timing

( $V_{DD5} = 3.0 \text{ V to } 5.5 \text{ V}$ ,  $V_{SS5} = AV_{SS5} = 0 \text{ V}$ ,  $T_A = -40^\circ\text{C} \text{ to } +125^\circ\text{C}$ )

Parameter	Symbol	Pin name	Value			Unit	Condition
			Min	Typ	Max		
Clock frequency	$f_c$	X0 X1	3.5	4	16	MHz	Opposite phase external supply or crystal
		X0A X1A	32	32.768	100	kHz	


- Clock timing condition

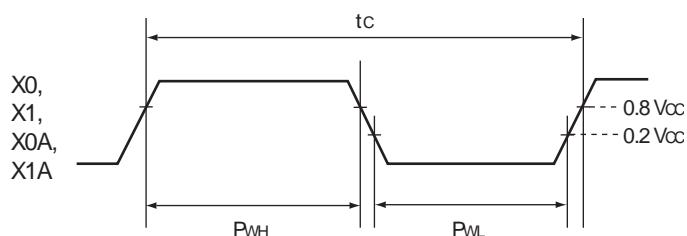

### 7.2. Reset input ratings

( $V_{DD5} = 3.0 \text{ V to } 5.5 \text{ V}$ ,  $V_{SS5} = AV_{SS5} = 0 \text{ V}$ ,  $T_A = -40^\circ\text{C} \text{ to } +125^\circ\text{C}$ )

Parameter	Symbol	Pin name	Condition	Value		Unit
				Min	Max	
INITX input time (at power-on)	$t_{INTL}$	INITX	—	8	—	ms
INITX input time (other than the above)				20	—	μs

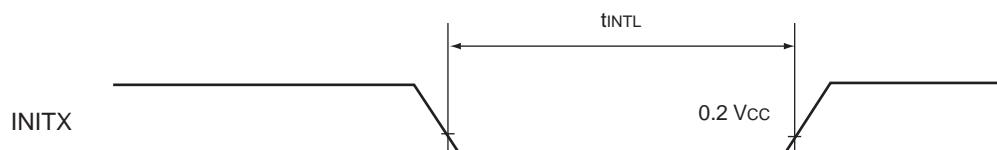

# MB91460B Series

## 7.3. LIN-USART Timings at $V_{DD5} = 3.0$ to $5.5$ V

- Conditions during AC measurements
- All AC tests were measured under the following conditions:
  - $IO_{drive} = 5$  mA
  - $V_{DD5} = 3.0$  V to  $5.5$  V,  $I_{load} = 3$  mA
  - $V_{SS5} = 0$  V
  - $T_a = -40$  °C to  $+125$  °C
  - $C_l = 50$  pF (load capacity value of pins when testing)
  - $VOL = 0.2 \times V_{DD5}$
  - $VOH = 0.8 \times V_{DD5}$
  - $EPILR = 0$ ,  $PILR = 1$  (Automotive Level = worst case)

( $V_{DD5} = 3.0$  V to  $5.5$  V,  $V_{SS5} = AV_{SS5} = 0$  V,  $T_A = -40$  °C to  $+125$  °C)


Parameter	Symbol	Pin name	Condition	$V_{DD5} = 3.0$ V to $4.5$ V		$V_{DD5} = 4.5$ V to $5.5$ V		Unit
				Min	Max	Min	Max	
Serial clock cycle time	t <sub>SCYCI</sub>	SCK <sub>n</sub>	Internal clock operation (master mode)	4 t <sub>CLKP</sub>	—	4 t <sub>CLKP</sub>	—	ns
SCK ↓ → SOT delay time	t <sub>SLOVI</sub>	SCK <sub>n</sub> SOT <sub>n</sub>		– 30	30	– 20	20	ns
SOT → SCK ↓ delay time	t <sub>OVSFI</sub>	SCK <sub>n</sub> SOT <sub>n</sub>		m × t <sub>CLKP</sub> – 30*	—	m × t <sub>CLKP</sub> – 20*	—	ns
Valid SIN → SCK ↑ setup time	t <sub>IVSFI</sub>	SCK <sub>n</sub> SIN <sub>n</sub>		t <sub>CLKP</sub> + 55	—	t <sub>CLKP</sub> + 45	—	ns
SCK ↑ → valid SIN hold time	t <sub>SHIXI</sub>	SCK <sub>n</sub> SIN <sub>n</sub>		0	—	0	—	ns
Serial clock "H" pulse width	t <sub>SHSLE</sub>	SCK <sub>n</sub>	External clock operation (slave mode)	t <sub>CLKP</sub> + 10	—	t <sub>CLKP</sub> + 10	—	ns
Serial clock "L" pulse width	t <sub>SLSHE</sub>	SCK <sub>n</sub>		t <sub>CLKP</sub> + 10	—	t <sub>CLKP</sub> + 10	—	ns
SCK ↓ → SOT delay time	t <sub>SLOVE</sub>	SCK <sub>n</sub> SOT <sub>n</sub>		—	2 t <sub>CLKP</sub> + 55	—	2 t <sub>CLKP</sub> + 45	ns
Valid SIN → SCK ↑ setup time	t <sub>IVSHE</sub>	SCK <sub>n</sub> SIN <sub>n</sub>		10	—	10	—	ns
SCK ↑ → valid SIN hold time	t <sub>SHIXE</sub>	SCK <sub>n</sub> SIN <sub>n</sub>		t <sub>CLKP</sub> + 10	—	t <sub>CLKP</sub> + 10	—	ns
SCK rising time	t <sub>FE</sub>	SCK <sub>n</sub>		—	20	—	20	ns
SCK falling time	t <sub>RE</sub>	SCK <sub>n</sub>		—	20	—	20	ns

\* : Parameter m depends on t<sub>SCYCI</sub> and can be calculated as :


- if  $t_{SCYCI} = 2^k \cdot t_{CLKP}$ , then  $m = k$ , where k is an integer > 2
- if  $t_{SCYCI} = (2^k + 1) \cdot t_{CLKP}$ , then  $m = k + 1$ , where k is an integer > 1

Notes : • The above values are AC characteristics for CLK synchronous mode.  
       • t<sub>CLKP</sub> is the cycle time of the peripheral clock.

- Internal clock mode (master mode)

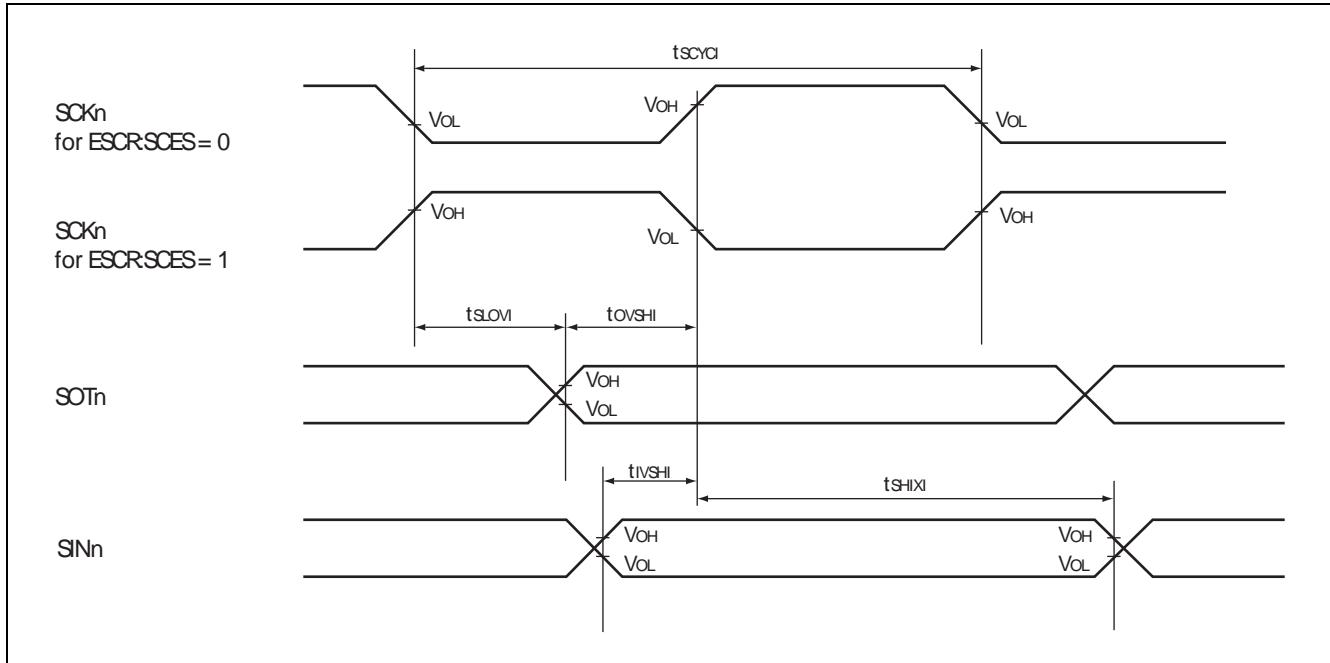

- External clock mode (slave mode)

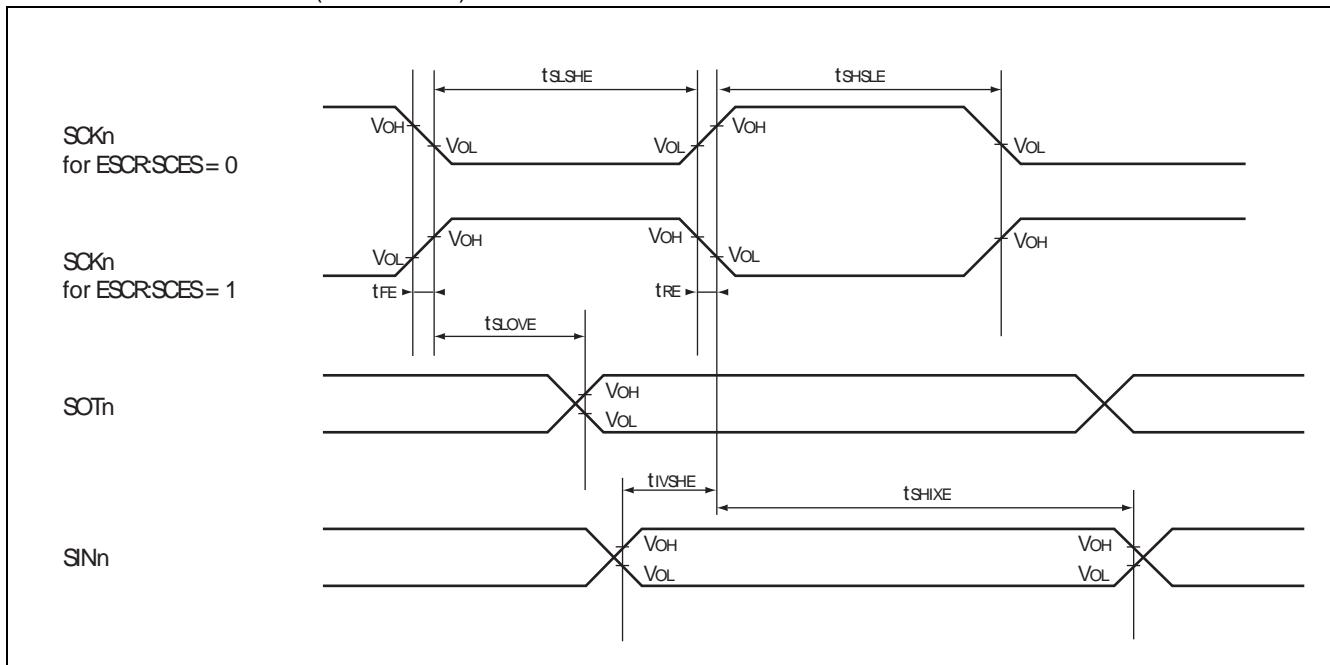

# MB91460B Series

## 7.4. I<sup>2</sup>C AC Timings at V<sub>DD5</sub> = 3.0 to 5.5 V

- Conditions during AC measurements

All AC tests were measured under the following conditions:

- I<sub>Odrive</sub> = 3 mA
- V<sub>DD5</sub> = 3.0 V to 5.5 V, I<sub>load</sub> = 3 mA
- V<sub>SS5</sub> = 0 V
- T<sub>A</sub> = - 40 °C to + 125 °C
- C<sub>I</sub> = 50 pF
- VOL = 0.3 × V<sub>DD5</sub>
- VOH = 0.7 × V<sub>DD5</sub>
- EPILR = 0, PILR = 0 (CMOS Hysteresis 0.3 × V<sub>DD5</sub>/0.7 × V<sub>DD5</sub>)


Fast mode:

(V<sub>DD5</sub> = 3.5 V to 5.5 V, V<sub>SS5</sub> = AV<sub>SS5</sub> = 0 V, T<sub>A</sub> = -40 °C to + 125 °C)

Parameter	Symbol	Pin name	Value		Unit	Remark
			Min	Max		
SCL clock frequency	f <sub>SCL</sub>	SCLn	0	400	kHz	
Hold time (repeated) START condition. After this period, the first clock pulse is generated	t <sub>HD;STA</sub>	SCLn, SDAn	0.6	—	μs	
LOW period of the SCL clock	t <sub>LOW</sub>	SCLn	1.3	—	μs	
HIGH period of the SCL clock	t <sub>HIGH</sub>	SCLn	0.6	—	μs	
Setup time for a repeated START condition	t <sub>SU;STA</sub>	SCLn, SDAn	0.6	—	μs	
Data hold time for I <sup>2</sup> C-bus devices	t <sub>HD;DAT</sub>	SCLn, SDAn	0	0.9	μs	
Data setup time	t <sub>SU;DAT</sub>	SCLn SDAn	100	—	ns	
Rise time of both SDA and SCL signals	t <sub>r</sub>	SCLn, SDAn	20 + 0.1Cb	300	ns	
Fall time of both SDA and SCL signals	t <sub>f</sub>	SCLn, SDAn	20 + 0.1Cb	300	ns	
Setup time for STOP condition	t <sub>SU;STO</sub>	SCLn, SDAn	0.6	—	μs	
Bus free time between a STOP and START condition	t <sub>BUF</sub>	SCLn, SDAn	1.3	—	μs	
Capacitive load for each bus line	C <sub>b</sub>	SCLn, SDAn	—	400	pF	
Pulse width of spike suppressed by input filter	t <sub>SP</sub>	SCLn, SDAn	0	(1..1.5) × t <sub>CLKP</sub>	ns	*1

\*1 The noise filter will suppress single spikes with a pulse width of 0ns and between (1 to 1.5) cycles of peripheral clock, depending on the phase relationship between I<sup>2</sup>C signals (SDA, SCL) and peripheral clock.

Note: t<sub>CLKP</sub> is the cycle time of the peripheral clock.

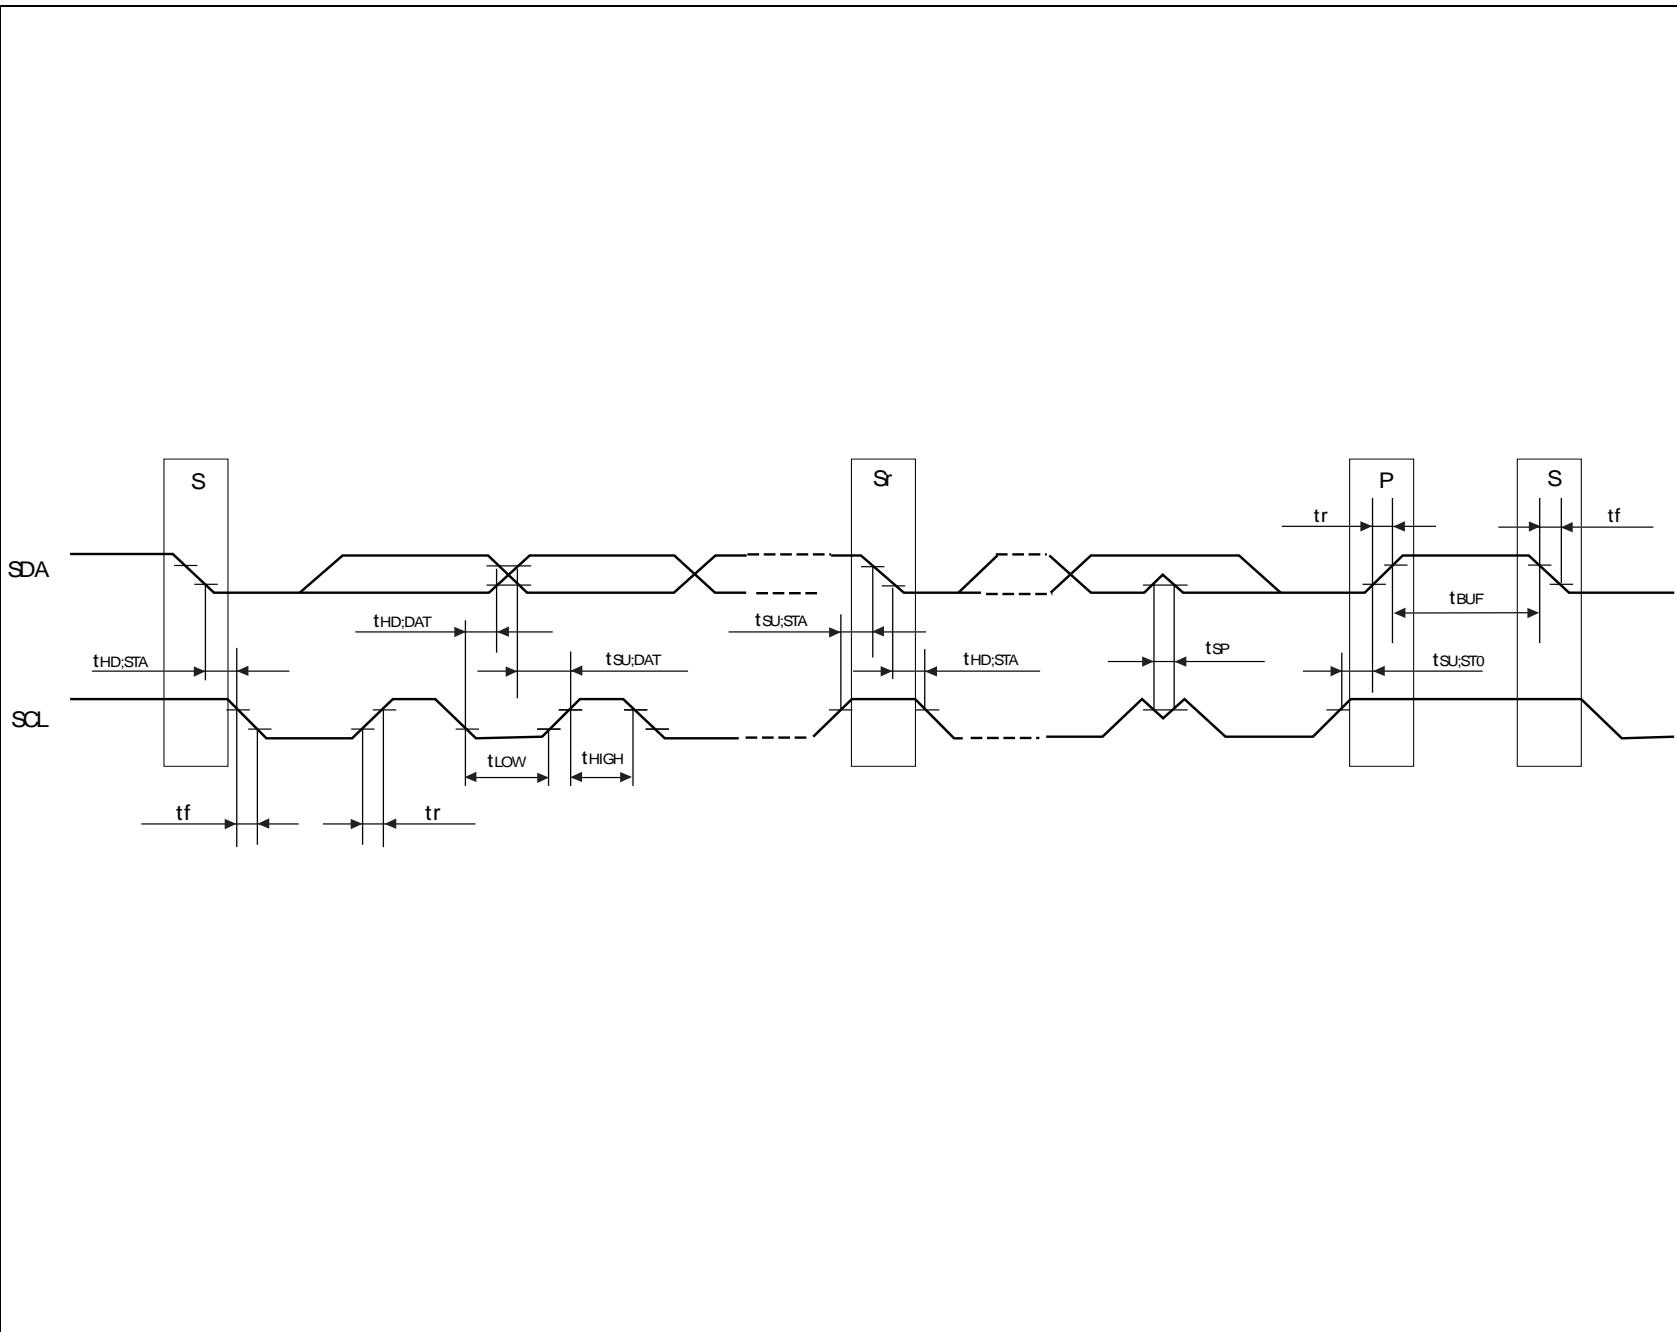


# MB91460B Series

## 7.5. Free-run timer clock

( $V_{DD5} = 3.0 \text{ V to } 5.5 \text{ V}$ ,  $V_{SS5} = AV_{SS5} = 0 \text{ V}$ ,  $T_A = -40 \text{ }^\circ\text{C to } +125 \text{ }^\circ\text{C}$ )

Parameter	Symbol	Pin name	Condition	Value		Unit
				Min	Max	
Input pulse width	$t_{TIWH}$ $t_{TIWL}$	CKn	—	$4t_{CLKP}$	—	ns

Note :  $t_{CLKP}$  is the cycle time of the peripheral clock.

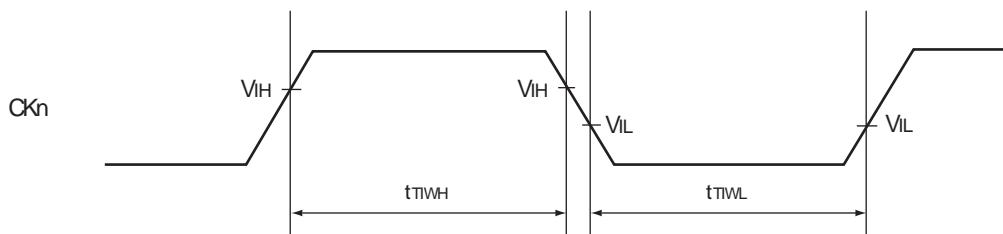


## 7.6. Trigger input timing

( $V_{DD5} = 3.0 \text{ V to } 5.5 \text{ V}$ ,  $V_{SS5} = AV_{SS5} = 0 \text{ V}$ ,  $T_A = -40 \text{ }^\circ\text{C to } +125 \text{ }^\circ\text{C}$ )

Parameter	Symbol	Pin name	Condition	Value		Unit
				Min	Max	
Input capture input trigger	$t_{INP}$	ICUn	—	$5t_{CLKP}$	—	ns
A/D converter trigger	$t_{ATGX}$	ATGX	—	$5t_{CLKP}$	—	ns

Note :  $t_{CLKP}$  is the cycle time of the peripheral clock.

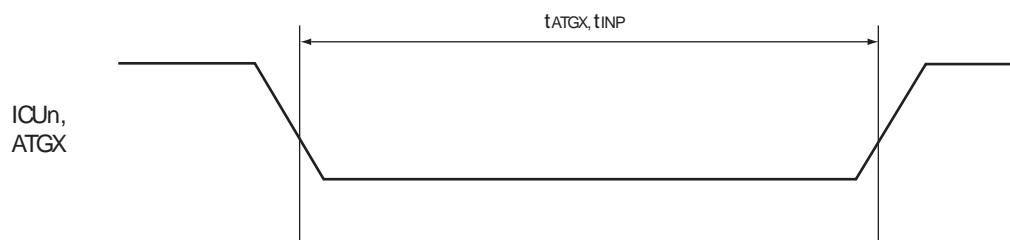

## 7.7. External Bus AC Timings at $V_{DD35} = 3.0$ to $5.5$ V

NOTE: This chapter is applicable to MB91F467BA/F466BA

- Conditions during AC measurements

All AC tests were measured under the following conditions:

- $IO_{drive} = 5$  mA
- $V_{DD35} = 4.5$  V to  $5.5$  V,  $I_{load} = 3$  mA
- $V_{SS5} = 0$  V
- $T_a = -40$  °C to  $+125$  °C
- $C_i = 50$  pF
- $V_{OL} = 0.5 \times V_{DD35}$
- $V_{OH} = 0.5 \times V_{DD35}$
- $EPILR = 0$ ,  $PILR = 1$  (Automotive Level = worst case)


### 7.7.1. Basic Timing

( $V_{DD35} = 3.0$  V to  $5.5$  V,  $V_{SS5} = A_{VSS5} = 0$  V,  $T_a = -40$  °C to  $+125$  °C)

Parameter	Symbol	Pin name	Value		Unit
			Min	Max	
SYSCLK	t <sub>CLCH</sub>	SYSCLK	$1/2 \times t_{CLKT} - 1$	$1/2 \times t_{CLKT} + 9$	ns
	t <sub>CHCL</sub>		$1/2 \times t_{CLKT} - 9$	$1/2 \times t_{CLKT} + 1$	ns
SYSCLK ↓ to CSXn delay time	t <sub>CLCSL</sub>	SYSCLK CSXn	—	8	ns
	t <sub>CLCSH</sub>		—	12	ns
SYSCLK ↑ to CSXn delay time (Addr → CS delay)	t <sub>CHCSL</sub>		- 6	+ 1	ns
SYSCLK ↓ to Address valid delay time	t <sub>CLAV</sub>	SYSCLK A21 to A0	—	13	ns

Note :  $t_{CLKT}$  is the cycle time of the external bus clock.


# MB91460B Series

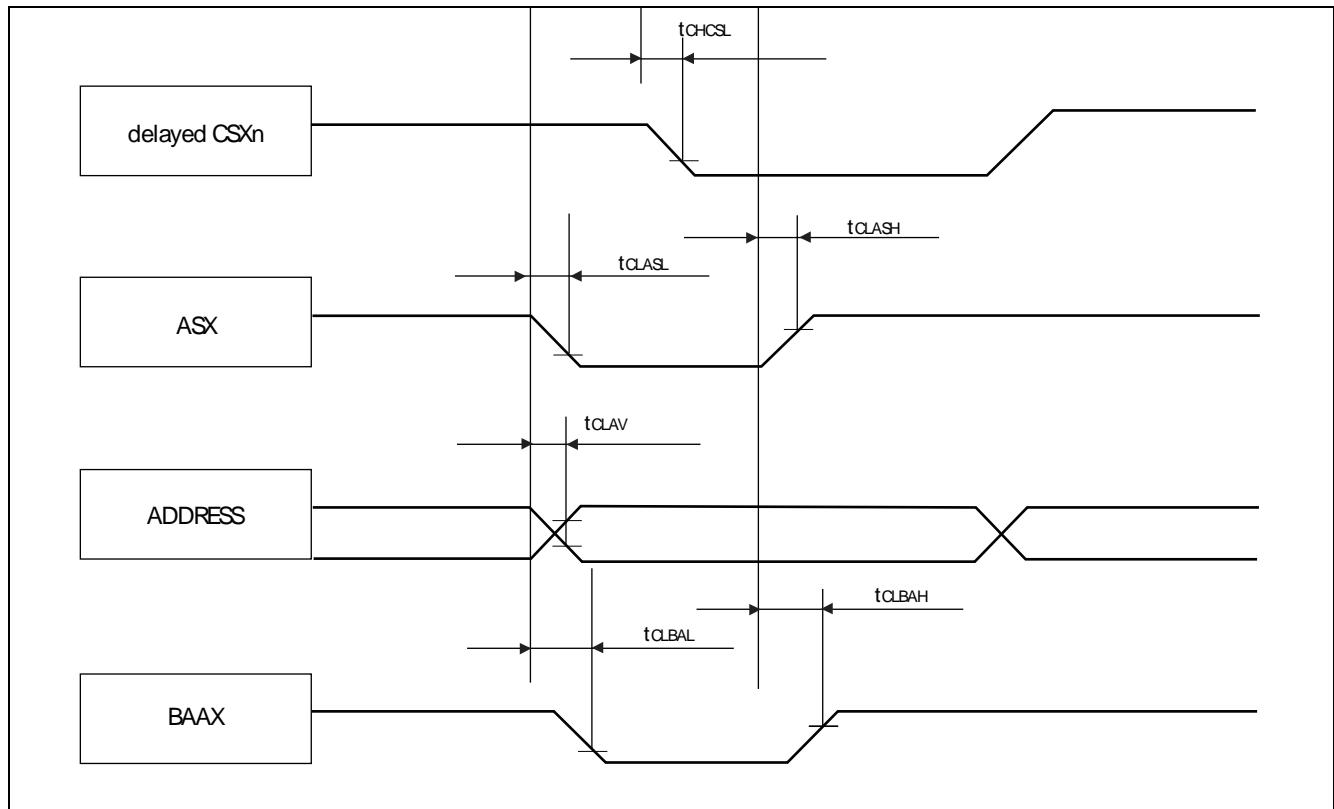

## 7.7.2. Synchronous/Asynchronous read access

( $V_{DD35} = 3.0 \text{ V to } 5.5 \text{ V}$ ,  $V_{SS5} = AV_{SS5} = 0 \text{ V}$ ,  $T_A = -40 \text{ }^\circ\text{C} \text{ to } +125 \text{ }^\circ\text{C}$ )

Parameter	Symbol	Pin name	Value		Unit
			Min	Max	
SYSCLK ↑ to RDX delay time	TCHRL	SYSCLK RDX	-7	1	ns
	TCHRH		-4	2	ns
Data valid to RDX ↑ setup time	TDSRH	RDX D31 to D16	33	—	ns
RDX ↑ to Data valid hold time	TRHDX	RDX D31 to D16	0	—	ns
SYSCLK ↓ to WRXn (as byte enable) delay time	TCLWRL	SYSCLK WRXn	—	8	ns
	TCLWRH		0	—	ns
SYSCLK ↓ to CSXn delay time	TCLCSL	SYSCLK CSXn	—	8	ns
	TCLCSH		—	12	ns

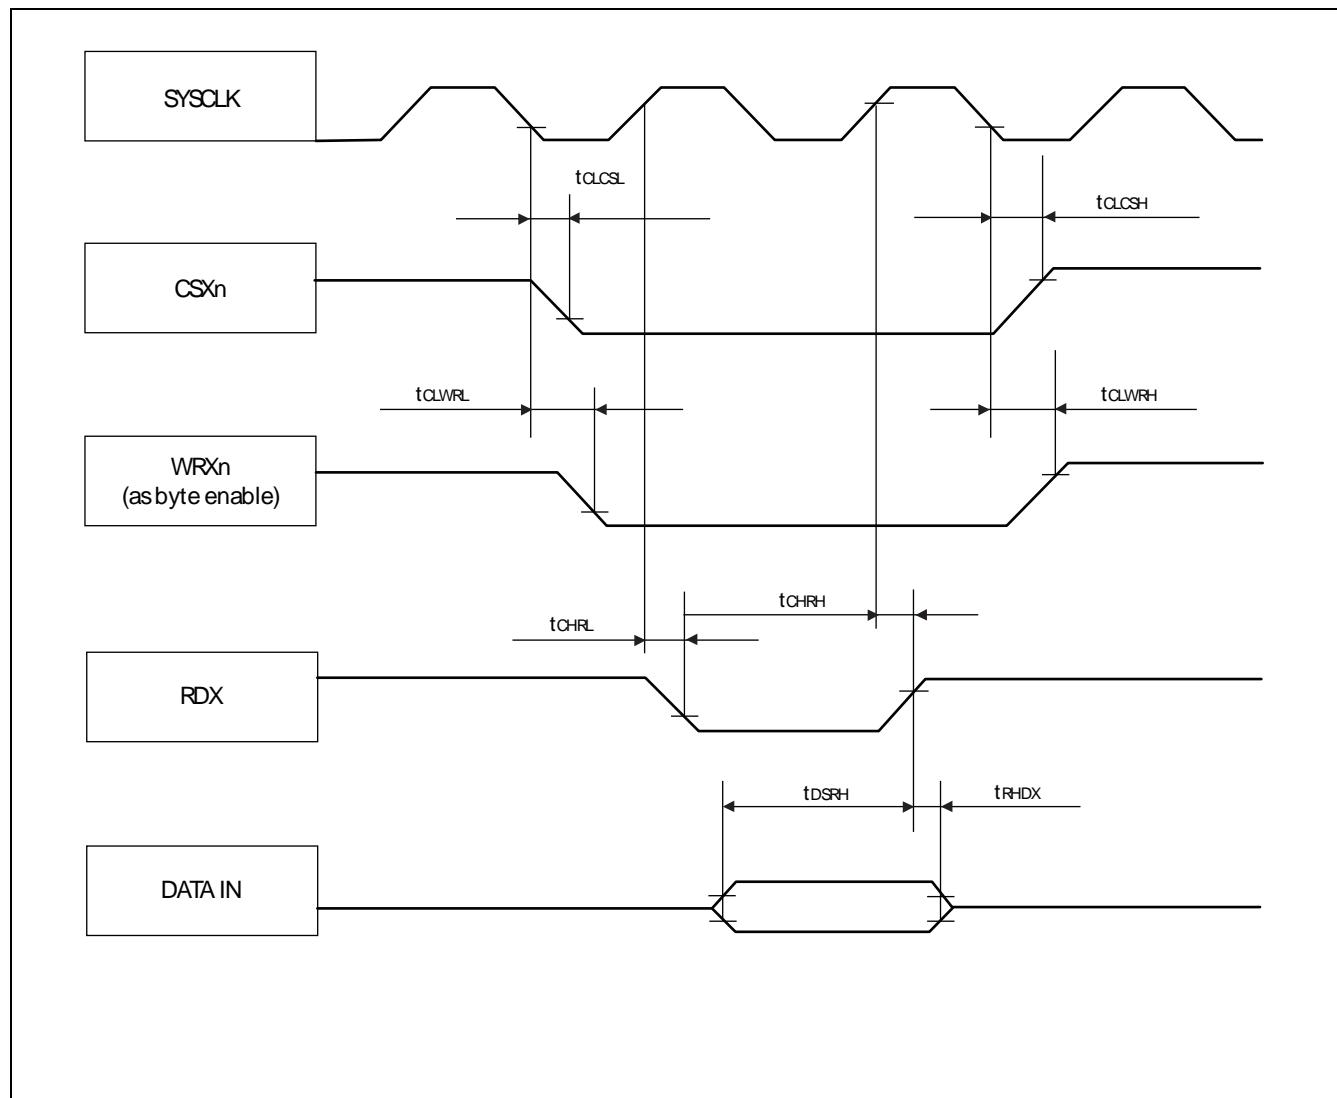


# MB91460B Series

## 7.7.3. Synchronous write access

( $V_{DD35} = 3.0 \text{ V to } 5.5 \text{ V}$ ,  $V_{SS5} = AV_{SS5} = 0 \text{ V}$ ,  $T_A = -40 \text{ }^\circ\text{C to } +125 \text{ }^\circ\text{C}$ )


Parameter	Symbol	Pin name	Value		Unit
			Min	Max	
SYSCLK ↓ to WRXn delay time	TCLWRL	SYSCLK	—	8	ns
	TCLWRH	WRXn	0	—	ns
Data valid to WRXn ↓ setup time	TDSWRL	WRXn D31 to D16	-7	—	ns
WRXn ↑ to Data valid hold time	TWRHDH	WRXn D31 to D16	t <sub>CLKT</sub> - 20	—	ns
SYSCLK ↓ to CSXn delay time	TCLCSL	SYSCLK	—	8	ns
	TCLCSH	CSXn	—	12	ns

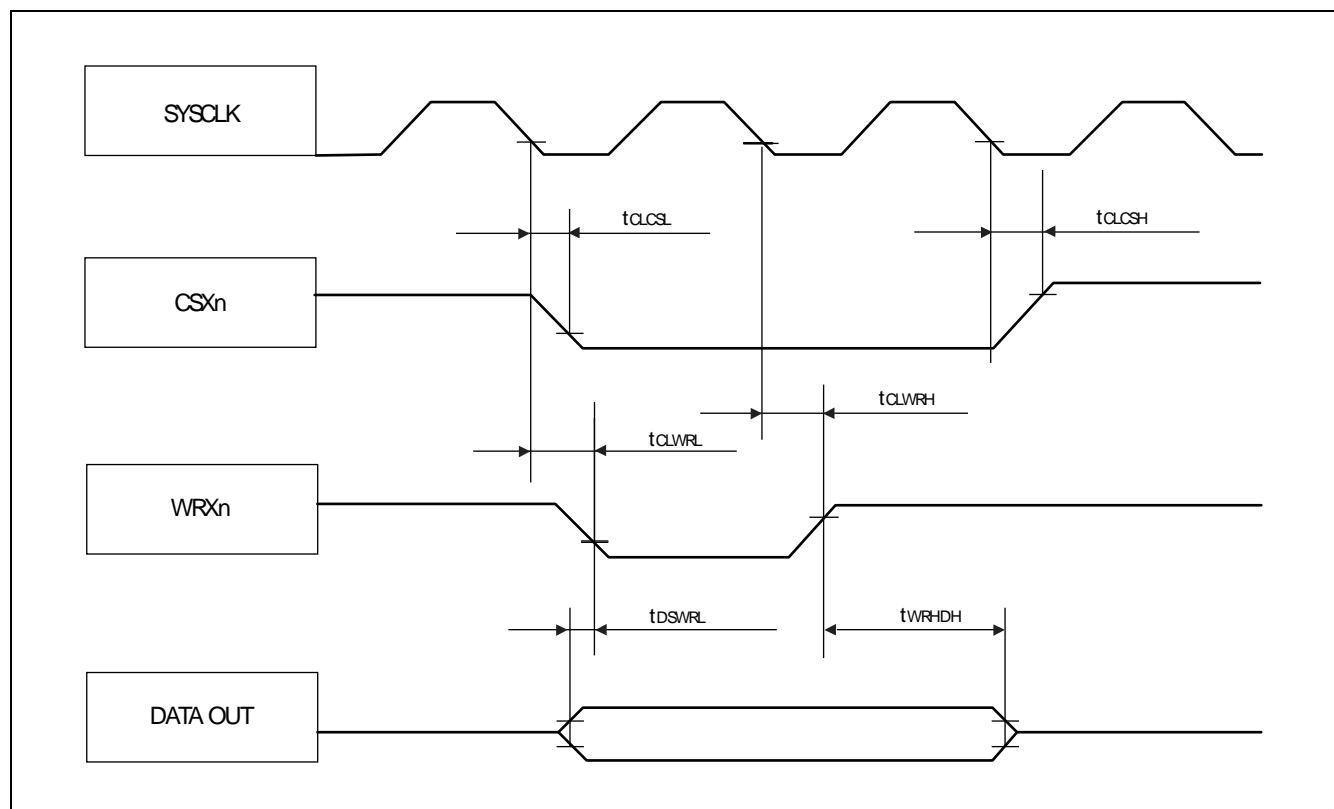

## 7.7.4. Asynchronous write access

( $V_{DD35} = 3.0 \text{ V to } 5.5 \text{ V}$ ,  $V_{SS5} = AV_{SS5} = 0 \text{ V}$ ,  $T_A = -40^\circ\text{C} \text{ to } +125^\circ\text{C}$ )

Parameter	Symbol	Pin name	Value		Unit
			Min	Max	
WRXn ↓ to WRXn ↑ pulse width	TWRLWRH	WRXn	$t_{CLKT}$	—	ns
Data valid to WRXn ↓ setup time	TDSWRL	WRXn D31 to D16	$1/2 \times t_{CLKT} - 10$	—	ns
WRXn ↑ to Data valid hold time	TWRHDH	WRXn D31 to D16	$1/2 \times t_{CLKT} - 19$	—	ns
WRXn to CSXn delay time	TCLWRL	WRXn CSXn	—	$1/2 \times t_{CLKT}$	ns
	TWRHCH		$1/2 \times t_{CLKT}$	—	ns

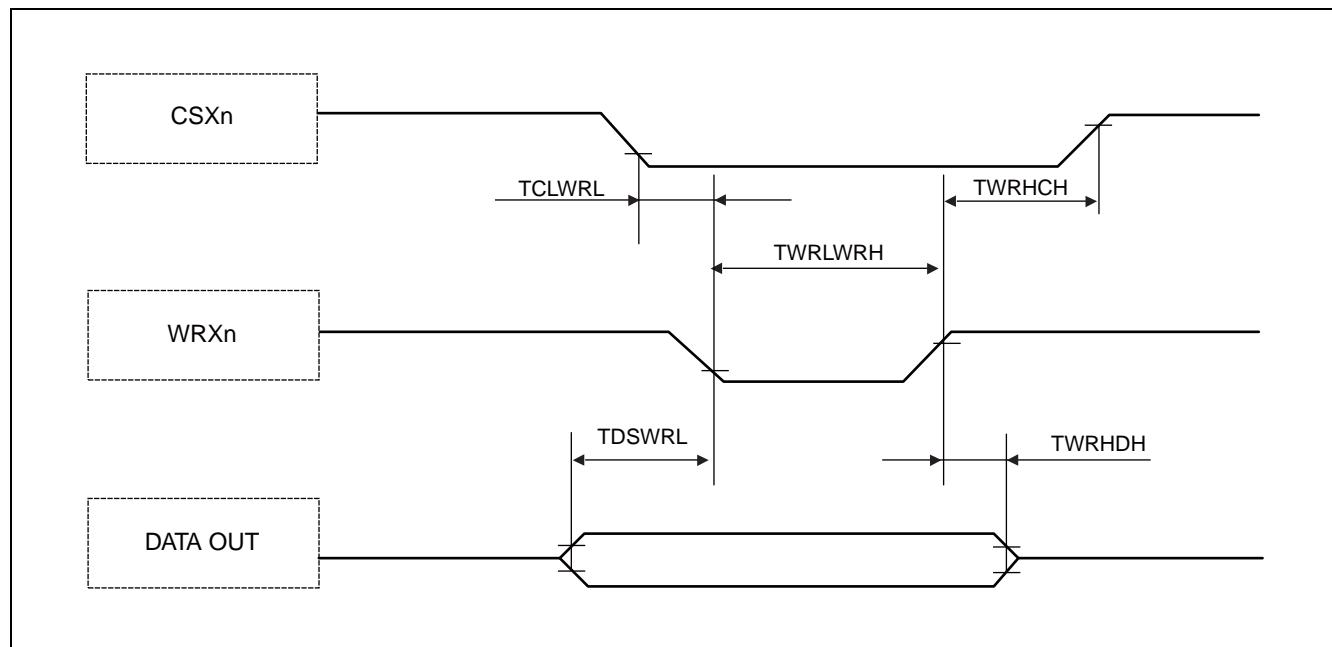


# MB91460B Series

## 7.7.5. RDY waitcycle insertion

( $V_{DD35} = 3.0 \text{ V to } 5.5 \text{ V}$ ,  $V_{SS5} = AV_{SS5} = 0 \text{ V}$ ,  $T_A = -40 \text{ }^\circ\text{C to } +125 \text{ }^\circ\text{C}$ )

Parameter	Symbol	Pin name	Value		Unit
			Min	Max	
RDY setup time	TRDYS	SYSCLK RDY	34	—	ns
RDY hold time	TRDYH	SYSCLK RDY	0	—	ns

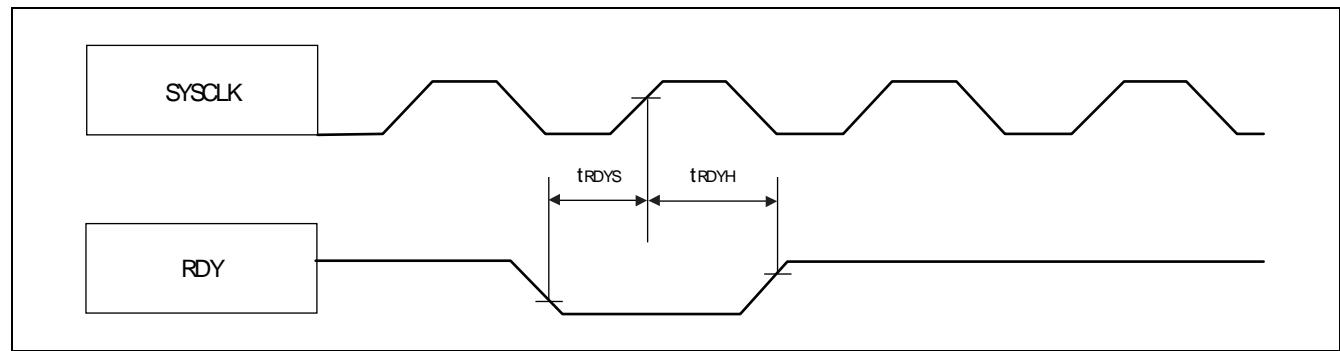



## ■ ORDERING INFORMATION

Part number	Package	Remarks
MB91F465BBPMC-GSE2	144-pin plastic LQFP (FPT-144P-M08)	
MB91F467BAPMC-GSE2		Lead-free package

# MB91460B Series

## ■ PACKAGE DIMENSION

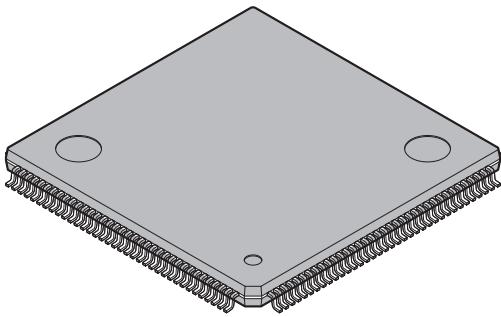 144-pin plastic LQFP  (FPT-144P-M08)	<table border="1"> <tbody> <tr> <td>Lead pitch</td><td>0.50 mm</td></tr> <tr> <td>Package width × package length</td><td>20.0 × 20.0 mm</td></tr> <tr> <td>Lead shape</td><td>Gullwing</td></tr> <tr> <td>Sealing method</td><td>Plastic mold</td></tr> <tr> <td>Mounting height</td><td>1.70 mm MAX</td></tr> <tr> <td>Weight</td><td>1.20g</td></tr> <tr> <td>Code (Reference)</td><td>P-LFQFP144-20×20-0.50</td></tr> </tbody> </table>	Lead pitch	0.50 mm	Package width × package length	20.0 × 20.0 mm	Lead shape	Gullwing	Sealing method	Plastic mold	Mounting height	1.70 mm MAX	Weight	1.20g	Code (Reference)	P-LFQFP144-20×20-0.50
Lead pitch	0.50 mm														
Package width × package length	20.0 × 20.0 mm														
Lead shape	Gullwing														
Sealing method	Plastic mold														
Mounting height	1.70 mm MAX														
Weight	1.20g														
Code (Reference)	P-LFQFP144-20×20-0.50														

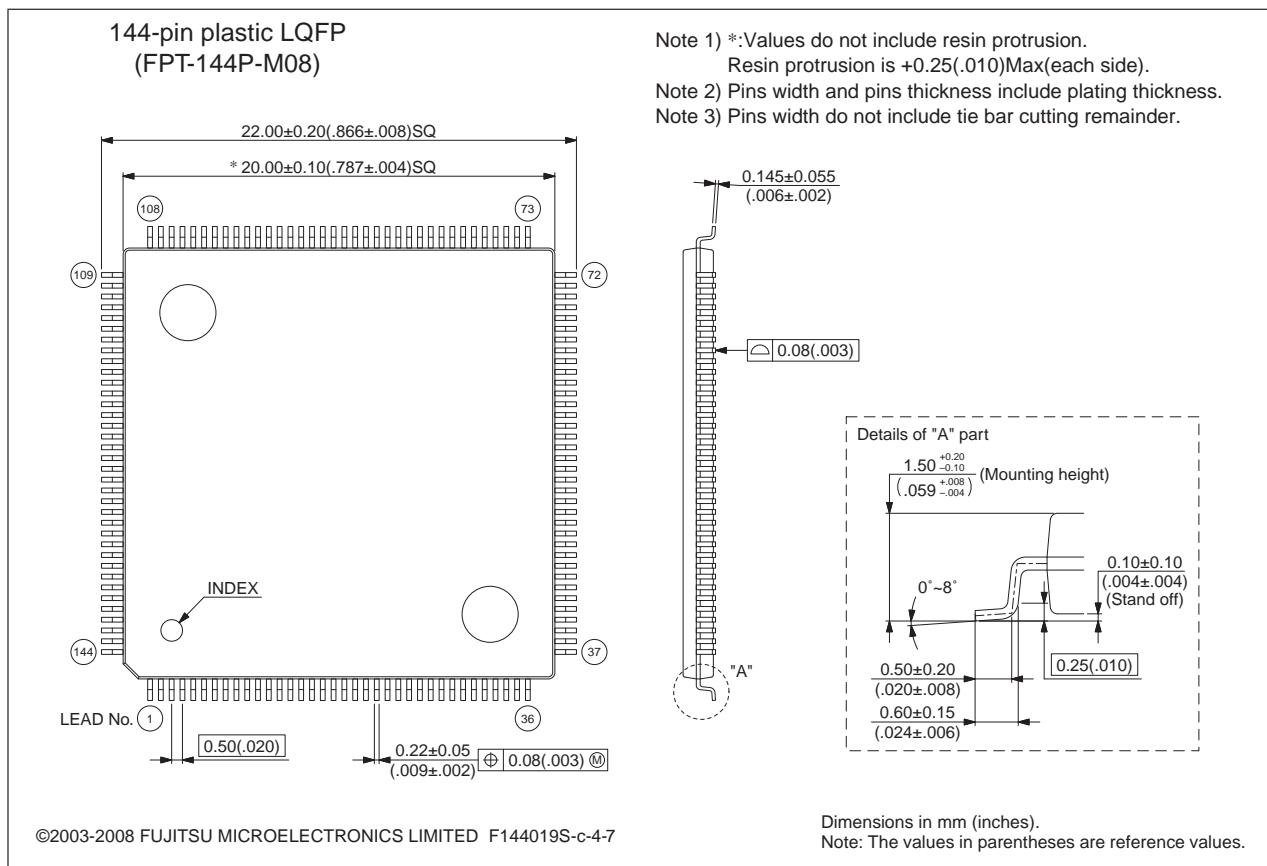

Please confirm the latest Package dimension by following URL.  
<http://edevice.fujitsu.com/package/en-search/>

## ■ REVISION HISTORY

Version	Date	Remark
2.0	2008-06-19	Initial version
2.1	2008-08-15	<p>Proof reading results from FJ incorporated;          Corrected pinout drawings;          IO CIRCUIT TYPES: corrected some typos like on the other datasheets;          HANDLING DEVICES: updated the section "Notes on PS register"              for better understanding;          Interrupt Vector Table: corrected the footnotes          FLASH: added note about the operation mode switching capability in              Boot ROM; corrected flash security vector FSV2 assignments,              corrected section about parallel programming,              corrected section pin connections in parallel programming mode              so that there is only one page              added section "Poweron Sequence in parallel programming mode";          ELECTRICAL CHARACTERISTICS: removed the note that analog              input/output pins cannot accept +B signal input;              splitted <math>I_{LV}</math> into external and internal LV detection current          ADC Characteristics: Corrected the items about nonlinearity error;          Corrected the company name</p>
3.0	2009-01-09	<p>Page 1: Corrected document name field in top header          Block Diagram: Removed SCK0 (LIN-USART0 is asynchronous only)          Added Ta=125C characteristics</p>

## ■ MAIN CHANGES IN THIS EDITION

Page	Section	Change Results
115	■ ELECTRICAL CHARACTERISTICS 4. A/D converter characteristics	<p>Corrected the column "Value" and "Unit" of the parameter "Zero reading voltage" and "Full scale reading voltage".          (Value :              AVRL – 1.5 → AVRL – 1.5 LSB              AVRL + 0.5 → AVRL + 0.5 LSB              AVRL + 2.5 → AVRL + 2.5 LSB              AVRH – 3.5 → AVRH – 3.5 LSB              AVRH – 1.5 → AVRH – 1.5 LSB              AVRH + 0.5 → AVRH + 0.5 LSB          Unit : LSB → V )</p>

The vertical lines marked in the left side of the page show the changes.

# MB91460B Series

## FUJITSU MICROELECTRONICS LIMITED

Shinjuku Dai-Ichi Seimei Bldg., 7-1, Nishishinjuku 2-chome,

Shinjuku-ku, Tokyo 163-0722, Japan

Tel: +81-3-5322-3329

<http://jp.fujitsu.com/fml/en/>

For further information please contact:

### North and South America

FUJITSU MICROELECTRONICS AMERICA, INC.

1250 E. Arques Avenue, M/S 333

Sunnyvale, CA 94085-5401, U.S.A.

Tel: +1-408-737-5600 Fax: +1-408-737-5999

<http://www.fma.fujitsu.com/>

### Asia Pacific

FUJITSU MICROELECTRONICS ASIA PTE. LTD.

151 Lorong Chuan,

#05-08 New Tech Park 556741 Singapore

Tel : +65-6281-0770 Fax : +65-6281-0220

<http://www.fmal.fujitsu.com/>

### Europe

FUJITSU MICROELECTRONICS EUROPE GmbH

Pittlerstrasse 47, 63225 Langen, Germany

Tel: +49-6103-690-0 Fax: +49-6103-690-122

<http://emea.fujitsu.com/microelectronics/>

FUJITSU MICROELECTRONICS SHANGHAI CO., LTD.

Rm. 3102, Bund Center, No.222 Yan An Road (E),

Shanghai 200002, China

Tel : +86-21-6146-3688 Fax : +86-21-6335-1605

<http://cn.fujitsu.com/fmc/>

### Korea

FUJITSU MICROELECTRONICS KOREA LTD.

206 Kosmo Tower Building, 1002 Daechi-Dong,

Gangnam-Gu, Seoul 135-280, Republic of Korea

Tel: +82-2-3484-7100 Fax: +82-2-3484-7111

<http://kr.fujitsu.com/fmk/>

FUJITSU MICROELECTRONICS PACIFIC ASIA LTD.

10/F., World Commerce Centre, 11 Canton Road,

Tsimshatsui, Kowloon, Hong Kong

Tel : +852-2377-0226 Fax : +852-2376-3269

<http://cn.fujitsu.com/fmc/en/>

Specifications are subject to change without notice. For further information please contact each office.

### All Rights Reserved.

The contents of this document are subject to change without notice.

Customers are advised to consult with sales representatives before ordering.

The information, such as descriptions of function and application circuit examples, in this document are presented solely for the purpose of reference to show examples of operations and uses of FUJITSU MICROELECTRONICS device; FUJITSU MICROELECTRONICS does not warrant proper operation of the device with respect to use based on such information. When you develop equipment incorporating the device based on such information, you must assume any responsibility arising out of such use of the information.

FUJITSU MICROELECTRONICS assumes no liability for any damages whatsoever arising out of the use of the information.

Any information in this document, including descriptions of function and schematic diagrams, shall not be construed as license of the use or exercise of any intellectual property right, such as patent right or copyright, or any other right of FUJITSU MICROELECTRONICS or any third party or does FUJITSU MICROELECTRONICS warrant non-infringement of any third-party's intellectual property right or other right by using such information. FUJITSU MICROELECTRONICS assumes no liability for any infringement of the intellectual property rights or other rights of third parties which would result from the use of information contained herein.

The products described in this document are designed, developed and manufactured as contemplated for general use, including without limitation, ordinary industrial use, general office use, personal use, and household use, but are not designed, developed and manufactured as contemplated (1) for use accompanying fatal risks or dangers that, unless extremely high safety is secured, could have a serious effect to the public, and could lead directly to death, personal injury, severe physical damage or other loss (i.e., nuclear reaction control in nuclear facility, aircraft flight control, air traffic control, mass transport control, medical life support system, missile launch control in weapon system), or (2) for use requiring extremely high reliability (i.e., submersible repeater and artificial satellite).

Please note that FUJITSU MICROELECTRONICS will not be liable against you and/or any third party for any claims or damages arising in connection with above-mentioned uses of the products.

Any semiconductor devices have an inherent chance of failure. You must protect against injury, damage or loss from such failures by incorporating safety design measures into your facility and equipment such as redundancy, fire protection, and prevention of over-current levels and other abnormal operating conditions.

Exportation/release of any products described in this document may require necessary procedures in accordance with the regulations of the Foreign Exchange and Foreign Trade Control Law of Japan and/or US export control laws.

The company names and brand names herein are the trademarks or registered trademarks of their respective owners.