



## INSTALLATION AND OPERATION MANUAL

### **EZ-MXA20** Model numbers: EZ-MXA20 includes power supply with North American plug EZ-MXA20X includes worldwide power supply (specify plug) **20 Watt Stereo Audio Mixer Amplifier with Tone Controls**



RDL EZ Series products provide the highest level of value to A/V professionals and A/V users who demand professional quality. For long-term performance, quality and value, you have made the EZ choice. EZ products are made in the USA by RDL, the inventor of application-specific modules bringing decades of experience as the world's leading manufacturer of high-reliability performance products to the A/V industry. Visit the RDL website for hundreds of professional A/V products made in the USA by RDL.



[www.rdlnet.com](http://www.rdlnet.com)

**Decades of Performance, Quality and Value**

RDL • 659 N. 6th Street • Prescott, AZ • USA 86301 • Sales: 800-281-2683 • 928-443-9391  
Tech Support: 800-933-1780 • 928-778-3554 • RDL Europe Sales & Support: (31) 20-6238-983


# EZ-MXA20

## 20 Watt Stereo Audio Mixer Amplifier with Tone Controls

- Audio Amplifier with Mic and Line Input Mixer
- 10 Watts RMS Per Channel into 8  $\Omega$
- 8 Watts RMS Per Channel into 4  $\Omega$
- Switch-Selectable Load Impedance on Rear Panel
- Balanced Microphone Input on XLR
- Unbalanced Line Inputs on RCA Jacks
- Switch-Selectable Phantom on Mic Input
- Bass and Treble Tone Control Equalization
- Integral Overload Limiter with LED Indicator
- Limiter Controls Overloads from Clipping

The EZ-MXA20 is a stereo mixer amplifier with one mic and two line inputs. Bass and treble tone controls are included. An integral compressor/limiter allows a higher sound output level without clipping than a standard amplifier. The outputs drive 4 or 8 ohm speakers. The EZ-MXA20 is used in houses of worship, restaurants, clubs, meeting rooms and commercial sound systems.

### TYPICAL APPLICATION

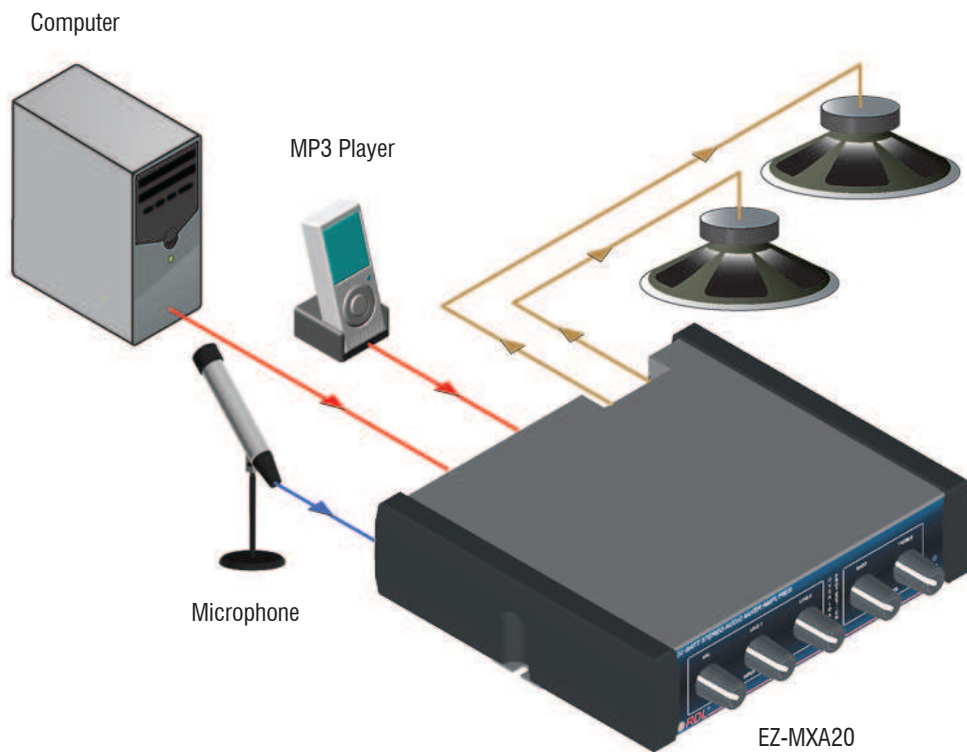

[www.rdl.net.com](http://www.rdl.net.com) . . . [www.rdlez.com](http://www.rdlez.com)

**LINE INPUT LEVELS**

Adjust for the desired sound level from the sources connected to LINE IN 1 and 2.

**OVERLOAD INDICATOR**

LED flashes when the internal compression circuits are protecting the amplifier output against overload. It is normal for this indicator to flash during high audio levels. Reduce the input level if this indicator flashes excessively or stays on continuously.

**MIC INPUT LEVEL**

Adjust for the desired microphone sound level.

**TONE CONTROLS**

Adjust for desired sound without causing amplifier overload.

**POWER INDICATOR**

Glowes blue when the product is connected to a valid power source.




**24 V POWER INPUT**

Insert plug from power supply. Rotate 1/4 turn clockwise to lock.

**SPEAKER WIRING**

Lift lever, insert wire. Close lever to lock.



**IMPEDANCE SELECTOR**

Set to match the speakers connected:  
8 Ohm: Button OUT  
4 Ohm: Button IN

**MICROPHONE INPUT**

Connect a microphone to the XLR jack. Microphone may be either a dynamic or condenser type.

**PHANTOM SELECTOR**

Set for mic type connected:  
Dynamic mic: OFF (out)  
Condenser mic: ON (in)


**LINE INPUTS**

Connect a line-level source to LINE IN 1 and/or 2.


**SPEAKER OUTPUTS**

Connect a pair of 8 Ohm or 4 Ohm speakers to the LEFT SPKR and RIGHT SPKR terminals. Connect the speaker "+" terminal to the amplifier "+" terminal. Connect the speaker "-" terminal to the amplifier "-" terminal. **DO NOT GROUND ANY SPEAKER OUTPUT TERMINAL!**


**POWER CONNECTION**



**FIXED MOUNTING**



**RUBBER FEET ATTACHMENT**



## SELECTED MOUNTING ACCESSORIES Complete accessory listing available at: [rdlez.com](http://rdlez.com)

### EZ-RA6

Rack Adapter for 6 Increments of 1/6 Rack Width



### EZ-CC6

Component Chassis for 6 Increments of 1/6 Rack Width



### EZ-SMB2

Surface Mount Bezel for 1/3 Rack Width Products



### EZ-DC2

Desktop Chassis 1/3 Rack Width



### EZ-UCB2

Under-Counter Brackets 1/6 or 1/3 Rack Width



### EZ-SD2

Storage Drawer 1/3 Rack Width

Use In Place of Filler Panel  
Holds Adapters and Cables  
Mounts in EZ-CC6 and EZ-RA6



## TYPICAL PERFORMANCE

Inputs (3): 1.2 k $\Omega$  balanced on XLR jack, mic-level, -55 dBu Min. (for 10 W out), -11 dBu max.(1); > 10 k $\Omega$ , -10 dBV nominal on RCA jacks, -13 dBV Min. (for 10 W out), +22 dBV max. (2)  
Gain: Off to 74 dB (mic), Off to 32 dB (line)  
Outputs (2): Left and Right, 10 Watts RMS into 8  $\Omega$  per channel or 8 Watts RMS into 4  $\Omega$  per channel, switch-selectable output impedance  
Equalization:  $\pm 10$  dB @ 10 kHz,  $\pm 9$  dB @ 80 Hz  
Frequency Response: 50 Hz to 20 kHz ( $\pm 1.5$  dB, mic input, 10 Watts), 35 Hz to 20 kHz ( $\pm 1.5$  dB, line input, 10 Watts)  
THD+N: < 0.25%  
CMRR: > -55 dB (mic)  
Crosstalk: < -68 dB (1 kHz, line input)  
Phantom: Switch-selectable 24 V (IEC 1938: 1996-12)  
Noise: < -70 dB (below 10 Watts, -10 dBV line input), < -65 dB (below 10 Watts, -50 dBu mic input)  
24 Vdc power supply current: 170 mA (idle), 1000 mA (max.)  
Power supply input voltage: 100 to 240 VAC  
Warranty: 3 Years; contact RDL technical support department for assistance  
Case dimensions: 5.75" (14.6 cm)W x 5" (12.7 cm)D  
Mounting size: 1/3 rack width

CE

891-1505

Copyright © 2009 Radio Design Labs, Inc. RDL, Radio Design Labs and the RDL logo are registered trademarks of Radio Design Labs, Inc. Data reflects product at publication time, subject to change without notice. "Made in USA" applies to all EZ products except power supplies.