


**Inductive sensor
ring sensor
BI30R-W30-DAP6X-H1141**

- Rectangular, height 30 mm
- Plastic, PA12-GF30
- Pulse duration 100 ms
- Sensitivity adjusted via potentiometer
- DC 3-wire, 10...30 VDC
- Dynamic output performance
- NO contact, PNP output
- M12 x 1 connector



Wiring diagram



Functional principle

Inductive sensors detect metal objects contactless and wear-free. For this purpose they use a high-frequency electromagnetic AC field that interacts with the target. Inductive ring sensors generate this field through an LC resonant circuit. The target acts as the coil core.

Output performance

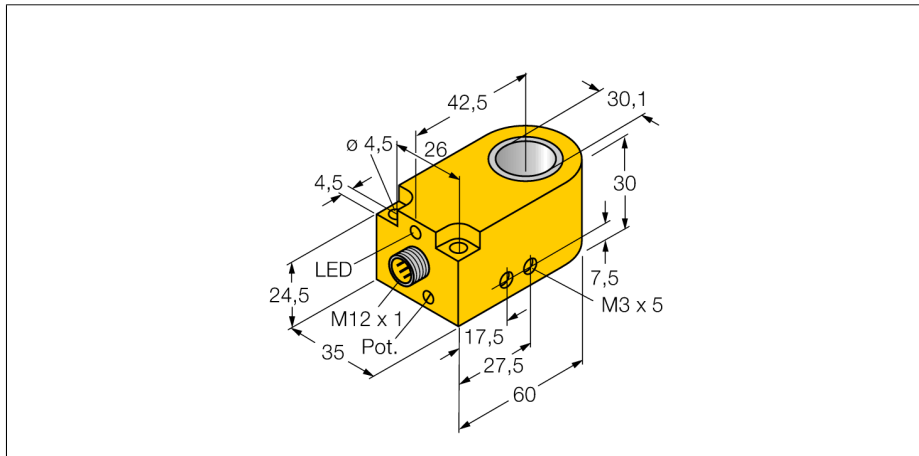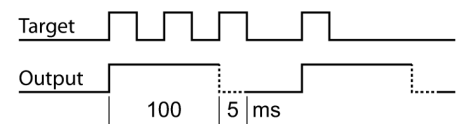

| | |
|---|--|
| Type code | BI30R-W30-DAP6X-H1141 |
| Ident no. | 14045 |
| Inside ring diameter D | 30.1 mm |
| Steel ball diameter (DIN 5401) | ≥ 3 mm |
| Fly-by speed | 0.1...50 m/s |
| pulse stop | ≥ 5 ms |
| Pulse duration | 100 ms ± 20 % |
| Ambient temperature | -25...+70 °C |
| Operating voltage | 10...30VDC |
| Residual ripple | ≤ 10 % U _{in} |
| DC rated operational current | ≤ 200 mA |
| No-load current I ₀ | ≤ 10 mA |
| Residual current | ≤ 0.1 mA |
| Rated insulation voltage | ≤ 0.5 kV |
| Short-circuit protection | yes/ cyclic |
| Voltage drop at I ₀ | ≤ 2.5 V |
| Wire breakage / Reverse polarity protection | yes/ complete |
| Output function | 3-wire, NO contact, PNP |
| Switching frequency | 0.008 kHz |
| Design | ring sensor, W30 |
| Dimensions | 60x 35x 30 mm |
| Housing material | Plastic, PA |
| Connection | male, M12 x 1 |
| Coil body | plastic, POM |
| Vibration resistance | 55 Hz (1 mm) |
| Shock resistance | 30 g (11 ms) |
| Protection class | IP67 |
| MTTF | 2283 years acc. to SN 29500 (Ed. 99) 40 °C |
| Switching state | ● yellow |

**Inductive sensor
ring sensor
BI30R-W30-DAP6X-H1141**

| | |
|------------|--------|
| Distance D | 120 mm |
| Distance W | 120 mm |
| Distance S | 30 mm |
| Distance G | 120 mm |

