



ON Semiconductor®

<http://onsemi.com>

LA1837

Monolithic Linear IC

Single-Chip IC

for Home Stereo IC

with Electronic Tuning Support

Overview

The LA1837 is a single-chip AM/FM IF and MPX IC that supports electronic tuning and was developed for use in home stereo systems. It is optimal for use in automatic station selection systems that use the SD and IF counting techniques.

Features

- On-chip MPX VCO (no external components required).
- Adjacent channel interference rejection function (third and fifth order).
- Supports both the SD and the IF counting techniques.
- The AM and FM SD sensitivities can be set independently.
- The AM and FM output levels can be set independently.
- Improved AM practical sensitivity and high-input distortion characteristics.

Functions

- AM : RF amplifier, mixer, oscillator, IF amplifier, detector AGC, oscillator buffer, S-meter, narrowband SD, IF buffer
- FM-IF : IF amplifier, quadrature detector, S-meter, Scurve detector, IF buffer output
- MPX : PLL stereo decoder, stereo display, forced mono, VCO stop, post amplifier, audio muting, adjacent channel interference rejection function

Specifications

Maximum Ratings at Ta = 25°C

Parameter	Symbol	Conditions	Ratings	Unit
Maximum supply voltage	V _{CC} max		12	V
Allowable power dissipation	P _d max	Ta ≤ 70°C	550	mW
Operating temperature	T _{opr}		-20 to +70	°C
Storage temperature	T _{stg}		-40 to +125	°C

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

LA1837

Operating Conditions at Ta = 25°C

Parameter	Symbol	Conditions	Ratings	Unit
Recommended supply voltage	V _{CC}		9	V
Operating supply voltage range	V _{CC op}		7 to 11	V



Electrical Characteristics at Ta = 25°C, V_{CC} = 9V, in the specified test circuit

Parameter	Symbol	Conditions	Ratings			Unit
			min	typ	max	
FM Mono characteristics fc = 10.7MHz, fm = 1kHz, with the coil adjusted so that V _{AFC} - V _{REG} = 0V						
Current drain	I _{CCO-FM}	With no input	18	31	44	mA
Demodulation output	V _{OFM}	100dBμ, 100% mod. The pin 16 output	730	1100	1460	mVrms
Channel balance	C.B-mono	100dBμ, 100% mod. The pin 16 output/pin 17 output	-1.5	0	+1.5	dB
Total harmonic distortion (mono)	THD _{FM(1)}	100dBμ, 100% mod. The pin 16 output		0.3	1.3	%
	THD _{FM(2)}	100dBμ, 100% mod. The pin 16 output		1.0	5	%
Signal-to-noise ratio	S/N _{FM}	100dBμ, 100% mod. The pin 16 output	72	80		dB
AM rejection ratio	AMR	100dBμ, 100% mod. The pin 16 output	45	65		dB
Limiting input voltage	-3dBLS.	100dBμ, 100% mod. Referenced to the output. The input such that the output is down -3 dB.	26	32	38	dBμ
LED sensitivity	SD _{On-FM}		51	60	69	dBμ
LED bandwidth	SD _{BW}	100dBμ	85	120	170	kHz
IF count buffer output	V _{IFBuff-FM}	100dBμ, The pin 13 output	80	120	160	mVrms
S-meter output	V _{S_M-FM(1)}	0dBμ, The pin 11 output	0	0.1	0.5	V
	V _{S_M-FM(2)}	100dBμ, The pin 11 output	3.6	4.3	5.0	V
Muting attenuation	Mute-Att	100dBμ, 100% mod. The pin 16 output	75	85		dB
FM stereo characteristics fc = 10.7MHz, 100dBμ, fm = 1kHz, L + R = 90%, pilot = 10%						
Separation (left)	Sep _L	L mod. The pin 16 output/pin 17 output	30	45		dB
Separation (right)	Sep _R	R mod. The pin 17 output/pin 16 output	30	45		dB
Stereo on level	ST _{ON}	The pilot modulation such that V7 is under 0.7V.	1.3	2.7	5	%
Stereo off level	ST _{OFF}	The pilot modulation such that V7 is over 4.5V.		1.5		%
Total harmonic distortion (main)	THD-main	L + R mod. The pin 16 output		0.3	1.3	%
Adjacent channel interference rejection ratio	Brej-3rd	fs = 113kHz, V _S = 90%, Pilot = 10%, The pin 16 output vs. the L-R mod. 1kHz demodulated output		40		dB
	Brej-5th	fs = 189kHz, V _S = 90%, Pilot = 10%, The pin 16 output vs. the L-R mod. 1kHz demodulated output		40		dB
AM characteristics fc = 1000kHz, fm = 1kHz						
Current drain	I _{CCO-AM}	With no input	15	25	35	mA
Detector output	V _{OAM(1)}	23dBμ, 30% mod. The pin 16 output	100	180	360	mVrms
	V _{OAM(2)}	80dBμ, 30% mod. The pin 16 output	200	320	500	mVrms
Signal-to-noise ratio	S/N _{AM(1)}	23dBμ, 30% mod. The pin 16 output	18	22		dB
	S/N _{AM(2)}	80dBμ, 30% mod. The pin 16 output	49	55		dB
Total harmonic distortion (mono)	THD _{AM(1)}	80dBμ, 30% mod. The pin 16 output		0.4	1.2	%
	THD _{AM(2)}	80dBμ, 80% mod. The pin 16 output		1.0	4.0	%
LED sensitivity	SD _{On-AM}		17	27	37	dBμ
Local oscillator buffer output	V _{OSC-AM}	With no input. The pin 30 output	110	160	220	mVrms
IF counter buffer output	V _{IFBuff-AM}	80dBμ, no modulation. The pin 13 output	160	220	300	mVrms
ST-IF output	V _{STIF-AM}	80dBμ, no modulation. The pin 7 output	16	34	48	mVrms
S-meter output	V _{S_M-AM}	0dBμ, no modulation.	0	0	0.2	V


LA1837

Package Dimensions

unit : mm (typ)
3196A

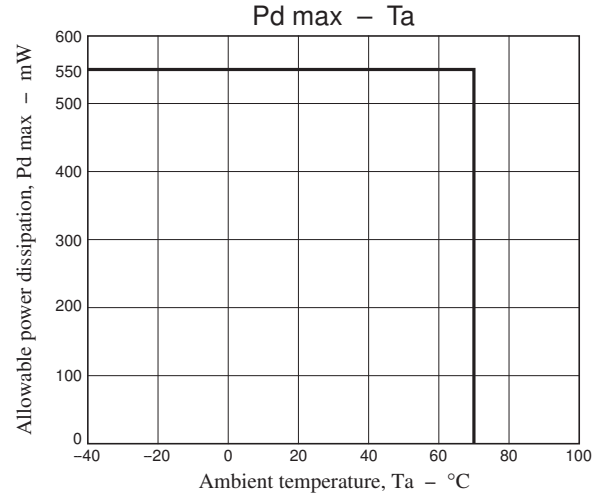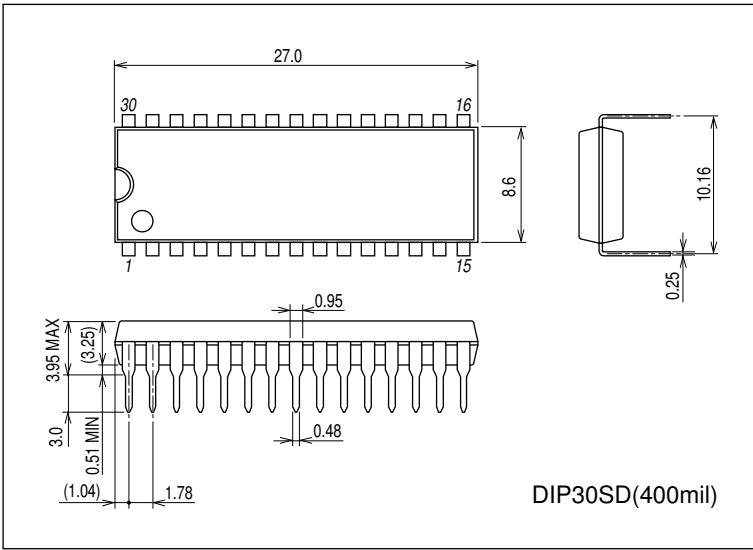


Block Diagram

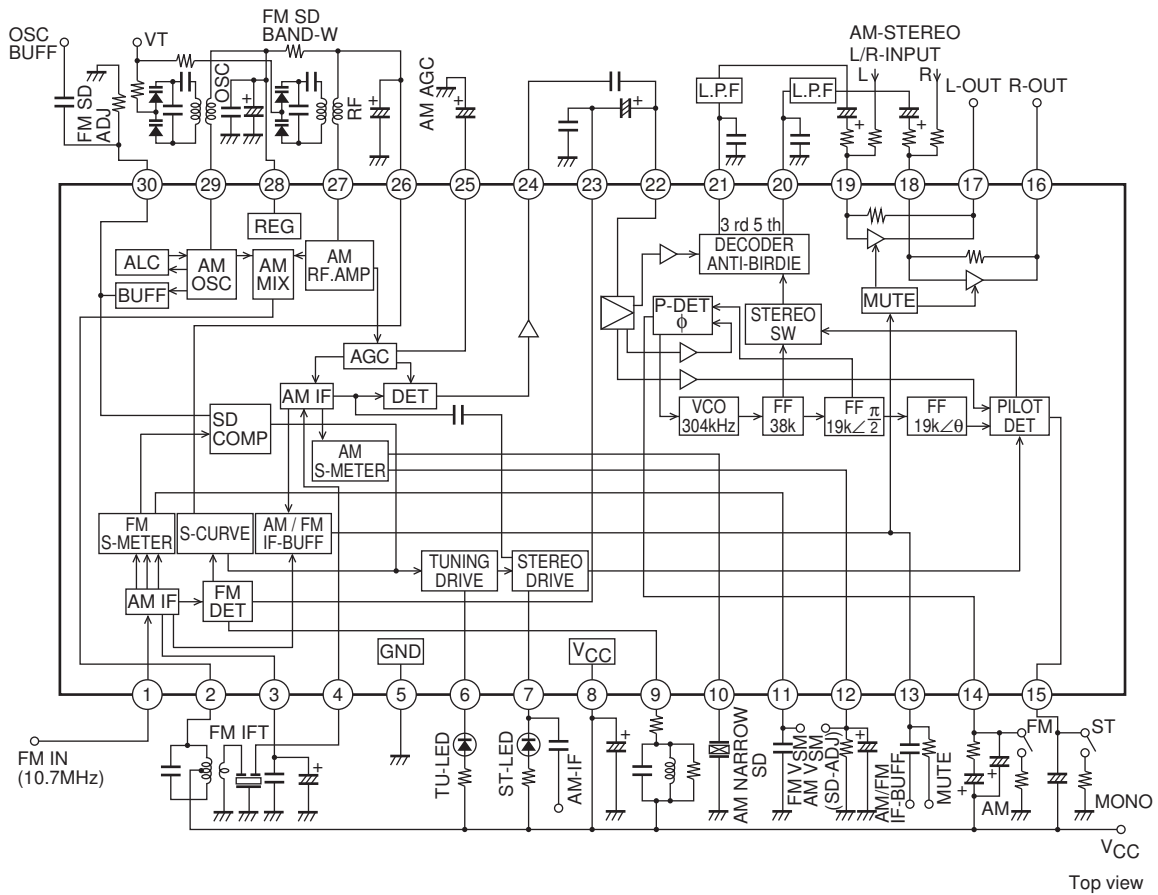

LA1837

Test Circuit

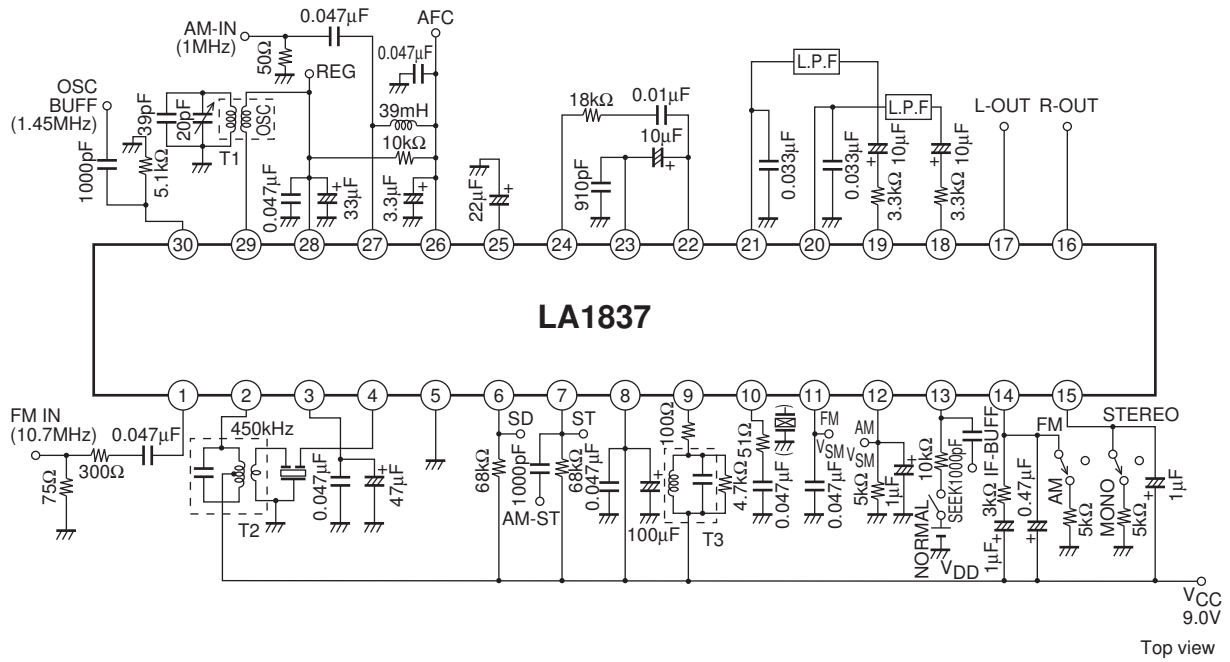

Top view












Pin Functions

Pin No.	Pin function	Pin voltage (V)	Pin description	Equivalent circuit
1	FM IF input	Vreg	Input impedance $r_i = 330\Omega$	
2	AM mixer output	VCC	Connect the mixer coil between this pin and VCC.	
3	FM IF input bypass	Vreg	Also functions as the MPX regulator filter.	See pin 1.
4	AM IF input	Vreg	Input impedance $r_i = 2k\Omega$	
5	GND	0V		
6	TU-LED	VCC	Active low	
7	ST-LED	VCC	Open collector output	
	AM-IF output		AM stereo IF output (pin 7) The current input must not exceed 150μA.	
8	VCC	VCC		
9	FM detector	VCC	Recommended detector coil : 600BEAS-9715Z (The Toko Electric Corporation)	
10	AM narrow band CF connection	1.3V	Recommended narrow band CF: BFU450 C4N (Murata Mfg. Co., Ltd.) If the narrow band SD is not used, bypass this circuit with a 50Ω resistor and a 0.047μF capacitor connected in series.	

Continued on next page.

LA1837






Continued from preceding page.

Pin No.	Pin function	Pin voltage (V)	Pin description	Equivalent circuit
11	FM-S-meter output	0V	$R_L = 8k\Omega$	
12	AM S-meter output AM SD sensitivity adjustment	0V (AM)	The AM SD sensitivity is adjusted with the value of the external resistor connected between this pin and ground.	
13	AM and FM IF buffer output, output control switch (mute switch)	0V	$V_{13} \leq 0.5V$: Reception state $1.4V \leq V_{13} \leq 2.2V$: IF buffer output turned on $V_{13} \geq 3.5V$: IF buffer output and muting are turned on	
14	Phase comparator low-pass filter (FM/AM switching)	$V_{CC}-1.4$ (FM) 0V (AM)	Connecting this pin to ground through a resistor sets the IC to AM mode. Resistor value limits : 2.7k Ω (when $V_{CC} = 7V$) 3.9k Ω (8V) 5.1k Ω (9V) 6.2k Ω (10V) 7.5k Ω (11V)	
15	Pilot detector low-pass filter (forced mono) (VCO stop)	$V_{CC}-1.0$	If a current of 50 μ A or greater flows from this pin, the system is forced to mono. Connecting this pin to ground stops the VCO. The resistor limit values are the same as for pin 14.	
16 17 18 19	Post amplifier input and output	V_{reg} V_{reg}	Output impedance $r_O = 200\Omega$ Pin 16 : right output, pin 17 : left output Inverting inputs Pin 18 : right input, pin 19 : left input $R_{NF} = 33k\Omega$	
20 21	MOX output	3.5V 3.5V	Output impedance $r_O = 3.3k\Omega$ Pin 20 : right de-emphasis Pin 21 : left de-emphasis	
22	MPX input	2.9V	Input impedance $r_i = 20k\Omega$	
23	FM demodulator output	2.8V (FM) 2.8V (AM)	Output impedance $r_O = 3.0k\Omega$ The separation can be modified by inserting a capacitor between this pin and ground. Set $V_O \text{ sub}/V_O \text{ main}$ to be about 0 dB.	
24	AM detector output	0V (FM) 0.5V (AM)	Output impedance $r_O = 3.3k\Omega$ The AM frequency characteristics can be modified by adjusting the time constants of the circuits between this pin and pin 22, and between this pin and ground.	
25	AM AGC	0V (FM) 0.5V (AM)	The built-in load resistor $R = 11k\Omega$.	




Continued on next page.









LA1837

Continued from preceding page.


Pin No.	Pin function	Pin voltage (V)	Pin description	Equivalent circuit
26	AFC	Vreg	The FM SD bandwidth can be modified with the external resistor connected between this pin and pin 28.	
27	AM RF input	Vreg	Use this pin at the same potential as pin 28.	
28	REG	Vreg	Vreg = 3.6V	
29	OSC	Vreg	Use an oscillator coil between this pin and pin 28.	
30	Oscillator buffer output, FM SD sensitivity adjustment	1.6V (FM) 1.3V (AM)	The FM SD sensitivity can be modified with the external resistor connected between this pin and ground. Output impedance $r_o = 20\Omega$	

Coil specifications (bottom view)


<p>•AM oscillator (for the DUT) HW-50425 (Mitsumi Electric Co., Ltd.)</p>  <p>3-2 2T 4-6 9T 2-1 86T Qo ≥ 80 L = 270μH</p>	<p>•IFT YD-1073-1 (Mitsumi Electric Co., Ltd.)</p>  <p>1-2 58T 4-6 7T 2-3 94T fo = 450kHz Qo = 110 Includes an internal 180pF capacitor. SFU450B included.</p>
<p>•FM detector 600BEAS-9715Z (The Toko Electric Corporation)</p>  <p>3-1 22T f = 10.7MHz Qo = 40 Includes an internal 82pF capacitor.</p>	

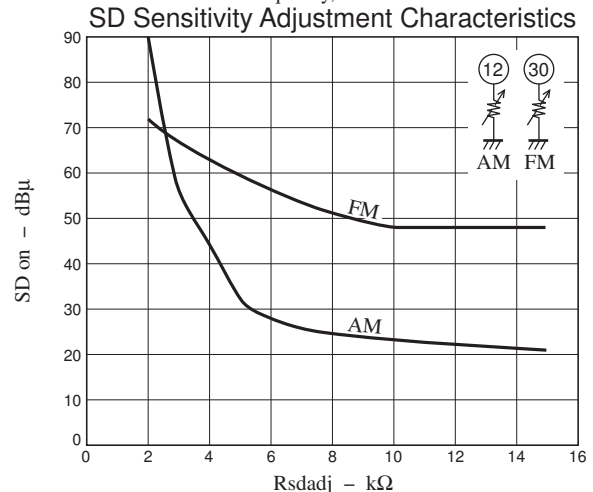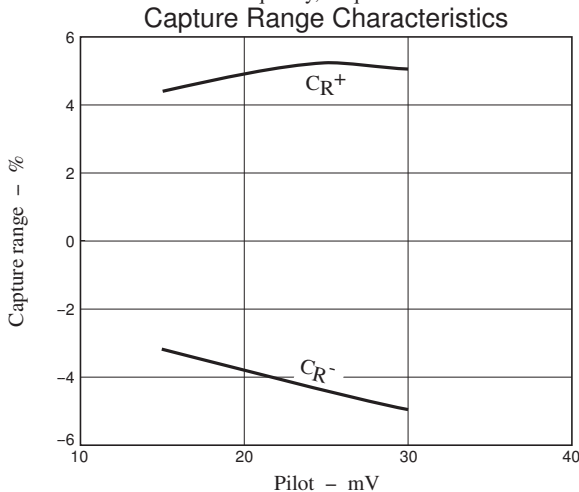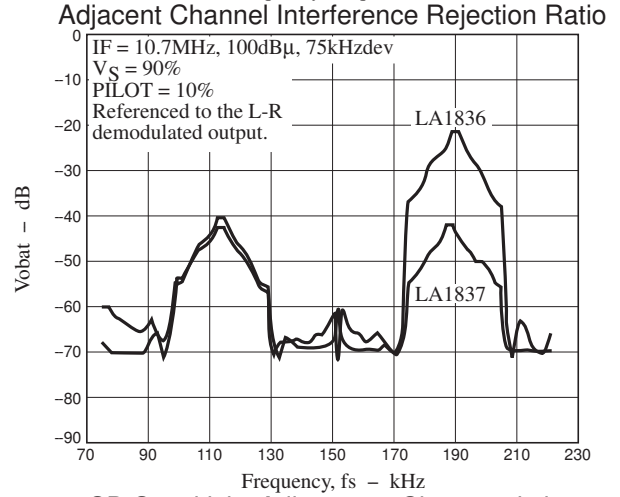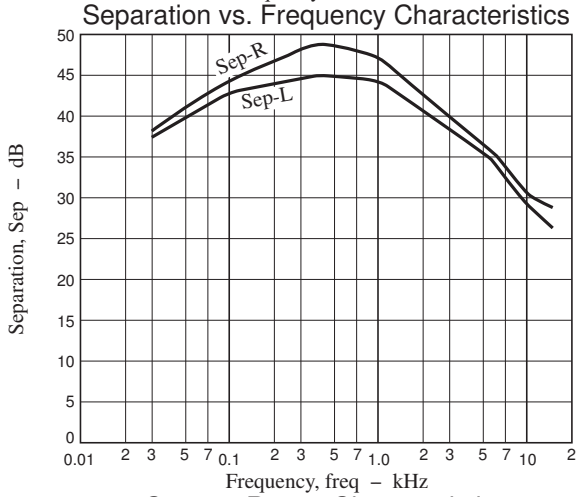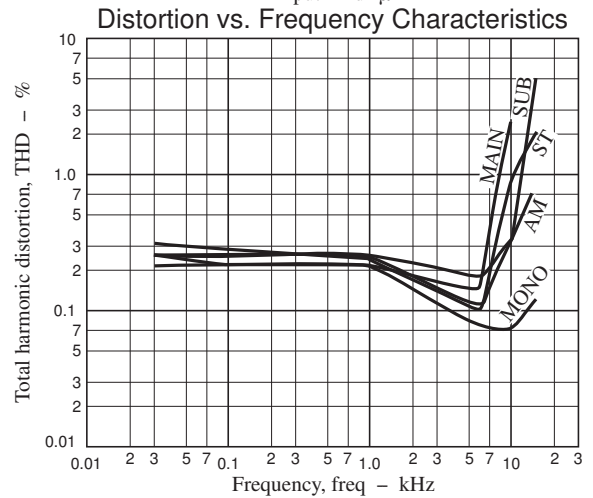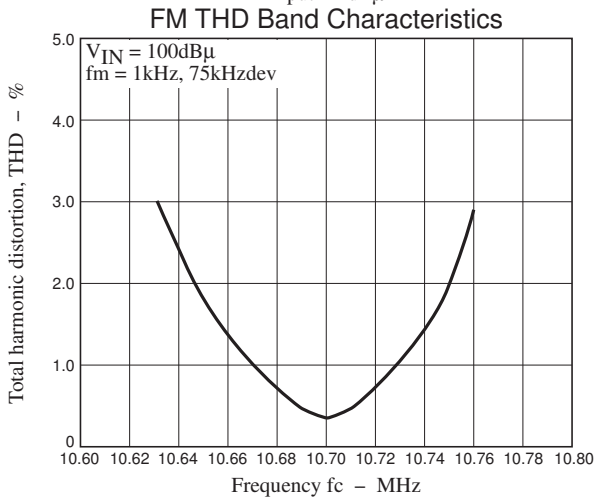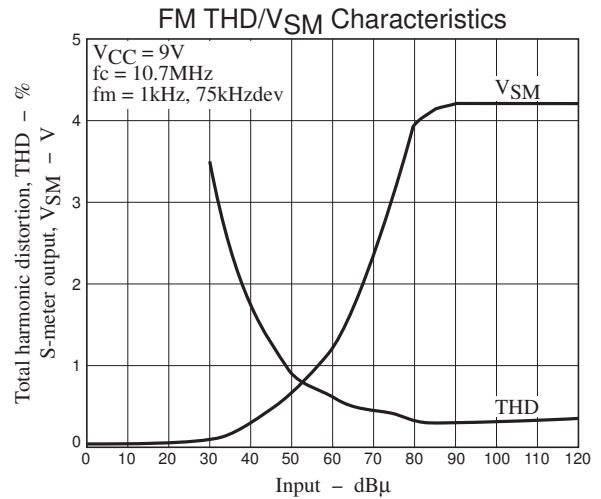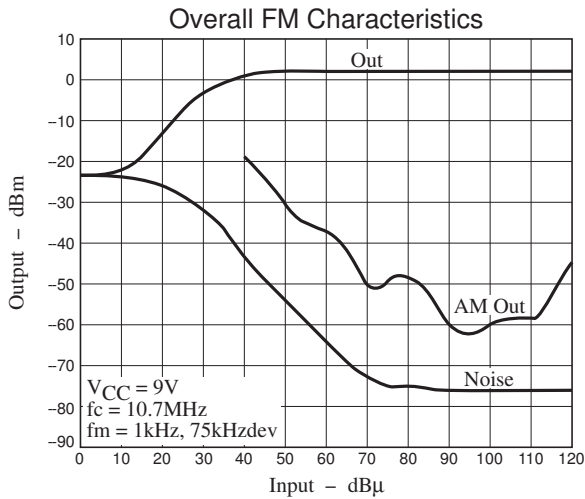


SD Sensitivity Adjustment Characteristics

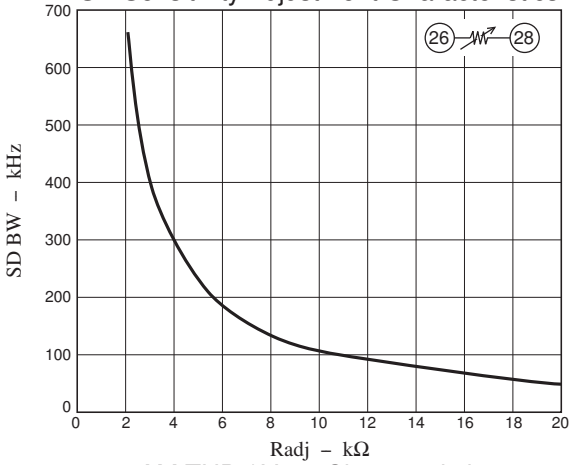


Overall AM Characteristics

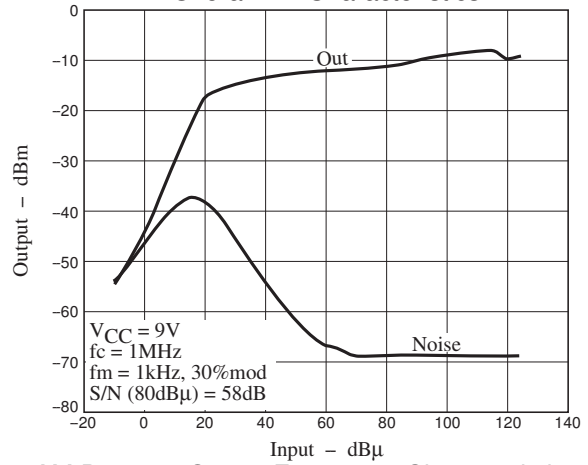


AM THD / VSM Characteristics

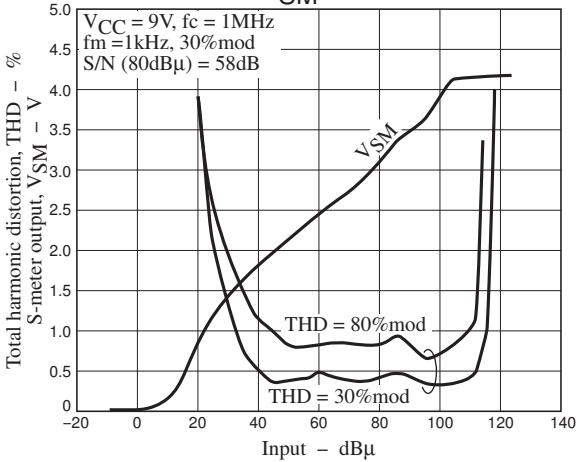


AM Detector Output Frequency Characteristics (1)

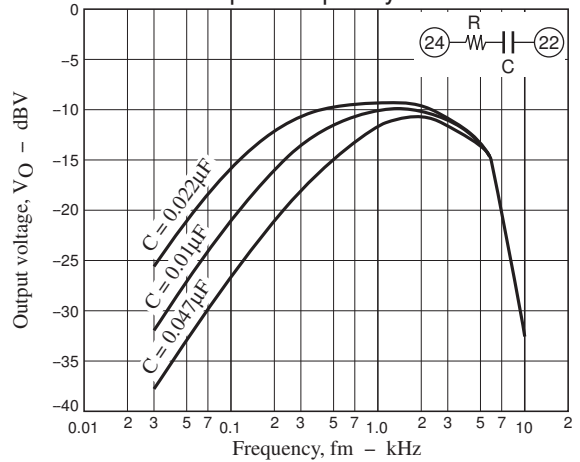


AM Detector Output Frequency Characteristics (2)

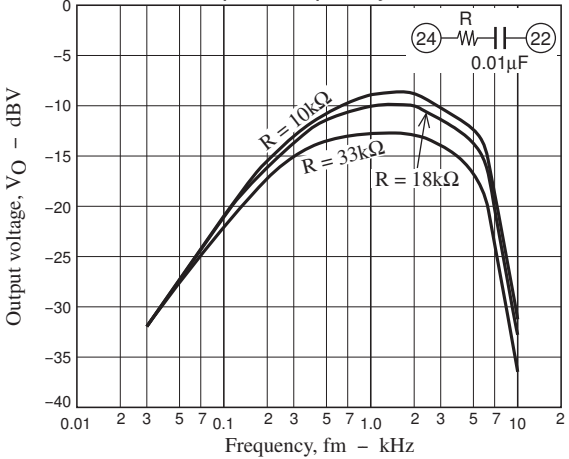

Distortion vs. Ambient Temperature Characteristics

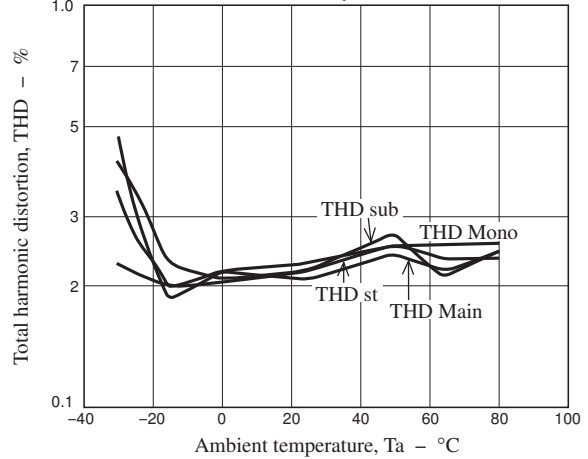

Separation vs. Ambient Temperature Characteristics

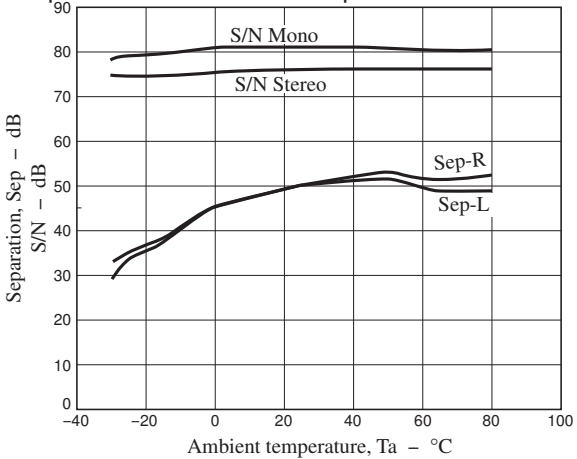

ON Semiconductor and the ON logo are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.