


HIGH FREQUENCY BALUN ADAPTER

For 150 Ω Fibre Channel , 100 Ω Gigabit Ethernet and 78 Ω High Speed 1553 Military/Aerospace Grade/Specialty Components

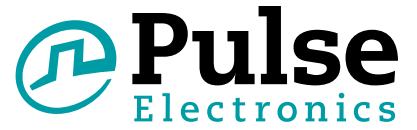

- 🔌 Transforms a balanced differential signal to a 50 Ω, grounded, unbalanced signal for testing differential cable
- 🔌 Designed for standard test equipment with SMA connectors
- 🔌 Wide bandwidth 1.0 MHz – 1.2 GHz
- 🔌 Operating temperature range from
- 🔌 0° C to 70° C



Electrical Specifications @ 25°C — Operating Temperature 0° C to +70° C

Part Number*	Impedance (Ω)	Rated (A)	Insertion Loss (dB MAX) 1.0 MHz - 1.2 GHz	Return Loss (dB MIN) 1.0 MHz - 1.2 GHz
	Unbalanced	Balanced		
HFB050150	50	150	-2	15
HFB050100	50	100	-2	15
HFB050078	50	78	-2	15

Mechanical

Schematic

HFB050XXX

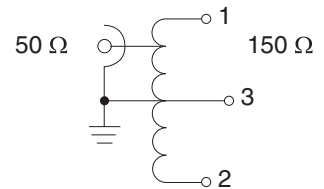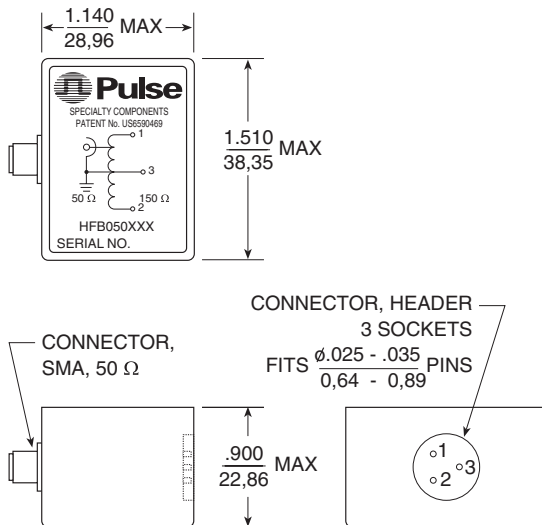


Weight 40.0 grams MAX
Packaging 1 per box

Dimensions: $\frac{\text{Inches}}{\text{mm}}$
Unless otherwise specified, all tolerances are $\pm .010$
0,25

HIGH FREQUENCY BALUN ADAPTER

For 150 Ω Fibre Channel, 100 Ω Gigabit Ethernet and 78 Ω High Speed 1553 Military/Aerospace Grade/Specialty Components

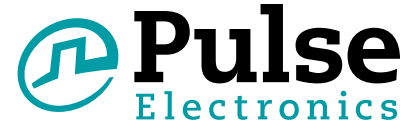


Application Notes

The Specialty Components Division has developed a high frequency BALUN for test and measurement applications. Wide bandwidth and high frequency response makes this device ideal for differential mode measurement in high

speed applications such as Fibre Channel, Gigabit Ethernet and next generation MIL-STD-1553. The BALUN allows design engineers to characterize differential mode devices using single-ended test equipment as shown below.



Typical Return Loss - S11

50 ohm Unbalanced Port

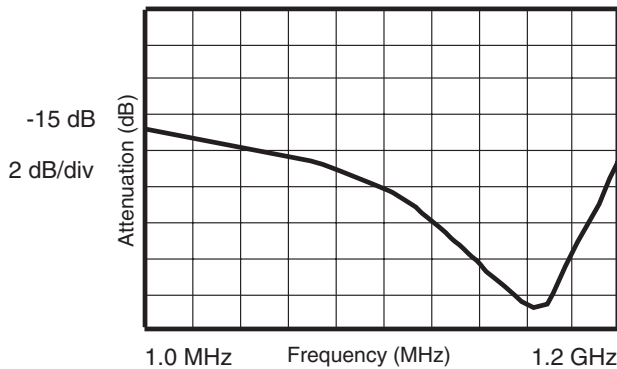

Typical Insertion Loss - S21


Two Baluns Configured Back to Back

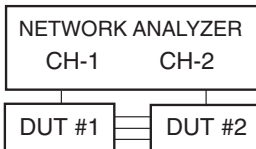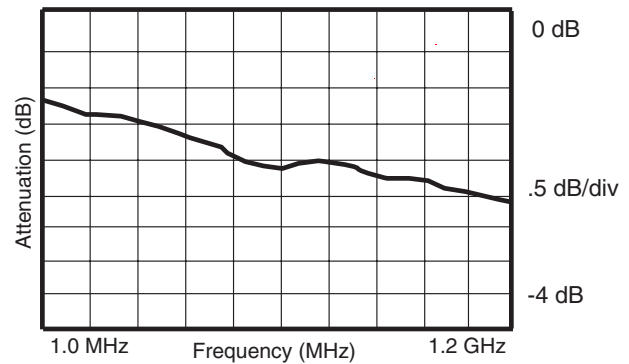

Insertion loss S21 is measured with two units connected back to back as shown.

Note 1: Correct value of S21 for each DUT will be 1/2 of the value shown in graph.

Note 2: Return loss S11 is measured on 50 ohm port with 150 ohms termination on balance port.

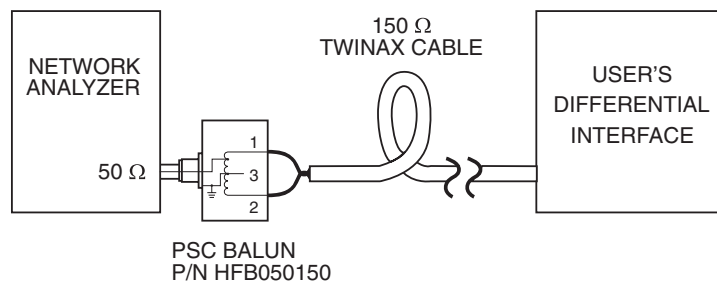

For More Information

Pulse North America Headquarters
Two Pearl Buck Court
Bristol, PA 19007
U.S.A.

Pulse Europe
Zeppelinstrasse 15
71083 Herrenberg
Germany

Pulse China Headquarters
B402, Shenzhen Academy of
Aerospace Technology Bldg.
10th Kejinan Road
High-Tech Zone
Nanshan District
Shenzhen, PR China 518057

Pulse North China
Room 2704/2705
Super Ocean Finance Ctr.
2067 Yan An Road West
Shanghai 200336
China

Pulse South Asia
135 Joo Seng Road
#03-02
PM Industrial Bldg.
Singapore 368363

Pulse North Asia
3F No. 198, Zhongyuan Road
Zhongli City
Taoyuan County (32068)
Taiwan

Tel: 215 781 6400
Fax: 215 781 6403

Tel: 49 7032 7806 0
Fax: 49 7032 7806 12

Tel: 86 755 33966678
Fax: 86 755 33966700

Tel: 86 21 62787060
Fax: 86 2162786973

Tel: 65 6287 8998
Fax: 65 6287 8998

Tel: 886 3 4356768
Fax: 886 3 4356823

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2013. Pulse Electronics, Inc. All rights reserved.