




Dimensions

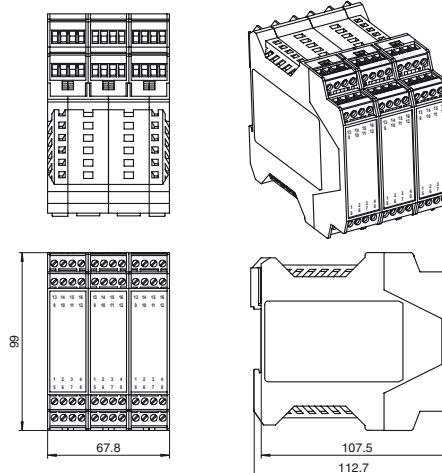

Model Number

SB4-OR-4XP-4M


Safety control unit

Safety control unit of series SB4

Features

- Evaluation unit for security through-beam sensors SLA5(S) and SLA40; for safety light grids SLP, for safety light curtains SLC; for switching pads and emergency stop buttons of categories 2 and 4
- 4 sensor channels
- Self-monitoring (type 4 according to IEC/EN 61496-1)
- Operating mode can be selected by means of DIP switches
- Start/Restart disable
- Relay monitor
- Sequential and parallel muting in various operating modes
- Double muting
- Emergency muting for the correction of the material jam
- Pre-fault indication
- Clearly visible LED functional display
- 7-segment diagnostic display
- Safety outputs OSSD, external status displays OSSD

Electrical connection



Slot 1 Slot 2 Slot 3

Terminal	Function
1	Reset input; normally closed contact
2	Restart input (RI); normally closed contact
3	24 V DC connection for reset, restart and RM
4	Relay monitor (RM)
5 - 6	OSSD1; potential free relay contact; normally open contact
7 - 8	OSSD2; potential free relay contact; normally open contact
9	Signal output OSSD OFF
10	Signal output OSSD ON
11	Signal output restart
12	Leave free (n.c.)
13	+24 V DC supply voltage
14	0 V DC supply voltage
15	Earth
16	Leave free (n.c.)

Terminal	Function
1	24 V sensor supply
2	Sensor 2 IN
3	Sensor 4 IN
4	0 V sensor supply
5	24 V sensor supply
6	Sensor 1 IN
7	Sensor 3 IN
8	0 V sensor supply
9	Input override 1
10	24 V override 1
11	24 V override 2
12	Input override 2
13	+24 V DC supply voltage for muting lamps
14	0 V DC supply voltage for muting lamps
15	Output muting lamp 1
16	Output muting lamp 2

Terminal	Function	Channel classification	Connection Beam sensor / Light grid safety feature	Connection 2-channel p ON	Connection Switching pad
1	Receiver 2 Input	Input	Receiver output 2	OSSD Output 1.2	Switching pad 1.4
2	Sensor 2 24 V DC +U	Channel 2	24 V Receiver2	24 V Power supply 1	
3	Sensor 2 Mass GND		0 V Receiver 2, Emitter 2	0 V Power supply 1	
4	Emitter 2 Output	Output	Emitter input 2		Switching pad 1.3
5	Receiver 1 Input	Input	Receiver output 1	OSSD Output 1.1	Switching pad 1.2
6	Sensor 1 24 V DC +U	Channel 1	24 V Receiver 1		
7	Sensor 1 Mass GND		0 V Receiver 1, Emitter 1		
8	Emitter 1 Output	Output	Emitter input 1		Switching pad 1.1
9	Emitter 3 Output	Output	Emitter input 3		Switching pad 2.4
10	Sensor 3 Mass GND	Channel 3	0 V Receiver 3, Emitter 3	0 V Power supply 2	
11	Sensor 3 24 V DC +U		24 V Receiver 3	24 V Power supply 2	
12	Receiver 3 Input	Input	Receiver output 3	OSSD Output 2.2	Switching pad 2.3
13	Emitter 4 Output	Output	Emitter input 2		Switching pad 2.2
14	Sensor 4 Mass GND	Channel 4	0 V Receiver 4, Emitter 4		
15	Sensor 4 24 V DC +U		24 V Receiver 4		
16	Receiver 4 Input	Input	Receiver output 4	OSSD Output 2.1	Switching pad 2.1

Technical data

General specifications

Operating mode Start/restart disable, relay monitor, muting operating modes

Functional safety related parameters

Safety Integrity Level (SIL)	SIL 3
Performance level (PL)	PL e
Category	Cat. 4
Mission Time (T <sub>M</sub> )	20 a
PFH <sub>d</sub>	3.5 E-9
Type	4

Indicators/operating means

Diagnostics display	7-segment display
Function display	LED red: OSSD OFF LED green: OSSD ON Yellow LED: start readiness channel 1 - 4 LED yellow: switching state (receiver)
Pre-fault indication	LED yellow flashing: Indicator lamp channel 1 ... 4

Electrical specifications

Operating voltage	U <sub>B</sub>	24 V DC, ± 20 %
No-load supply current	I <sub>0</sub>	500 mA

Input

Activation current	approx. 7 mA
--------------------	--------------

Release date: 2011-06-15 14:42 Date of issue: 2011-06-27 192147\_eng.xml

Subject to modifications without notice

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776-4411  
fa-info@pepperl-fuchs.com

Copyright Pepperl+Fuchs  
Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com



Activation time	0.4 ... 1.2 s
Test input	Reset-input for system test
<b>Output</b>	
Safety output	2 relay outputs, force-guided NO-contact
Signal output	1 PNP each, max. 300 mA for start readiness, OSSD on, OSSD off, muting lamp
Switching voltage	10 V ... 250 V AC/DC
Switching current	min. 10 mA , max. 6 A AC/DC
Switch power	DC: max. 24 VA AC: max. 230 VA
Response time	38 ms
<b>Ambient conditions</b>	
Ambient temperature	0 ... 50 °C (32 ... 122 °F)
Storage temperature	-20 ... 70 °C (-4 ... 158 °F)
<b>Mechanical specifications</b>	
Protection degree	IP20
Connection	screw terminals , lead cross section 0.2 ... 2 mm <sup>2</sup>
<b>Material</b>	
Housing	Polyamide (PA)
Mass	430 g
<b>Compliance with standards and directives</b>	
Standard conformity	(extract)
Standards	EN IEC 61496-1 EN IEC 61508 EN ISO 13849-1
<b>Approvals and certificates</b>	
SIL classification	up to SIL3 acc. to IEC 61508 tested and certified by TÜV SÜD according to: IEC 61508:1998 part 1, 3.4 IEC 61508: 2000 ISO 13849-1:2006 EN 50178:1997 IEC 61496-1:2004 IEC 61496-2:2006
UL approval	cULus
TÜV approval	TÜV

## Function

The evaluation system SB4 is an ESPE of type 4 (EN 61496-1 or IEC 61496-1) or category 4 (EN 954-1). This system is also designed and tested according to IEC 61508. It meets the requirements for the SIL3.

The operating instructions supplied with the device must be observed for planning, installation and operation.

A maximum of 4 safety light barriers can be connected to the evaluation device.

With the sensor card on position 2, it is possible to connect "3-wire" light barriers of the SLA family (for example SLA5) and light grids of the SLP type. But also p-switching safety devices with dedicated cross circuit monitoring can be connected, for example safety light curtains from the SLC family. In addition switch-off mats of the 4-wire principle or integrated safety sensors in the 1 or 2 channel version can be connected.

The cable or the manner it is laid to the light barriers and light grids must be chosen that no short circuit between the receiver and transmitter wires is possible.

Light curtains with semiconductor switch outputs and integrated safety sensors in 2 channel design are monitored for simultaneousness. The monitoring time is 2 s.

The connection is done on channels 3 and 4 and/or 1 and 2. Note that these sensors must feature a dedicated cross circuit monitoring, because the module does not

carry out the cross circuit monitoring for these sensors. Integrated safety sensors, which are connected to the Safebox must work according to the normally closed principle.

An open contact means "safe status". Switch-off mats of the 4-wire principle can be connected to channels 1 and 2 and/or 3 and 4.

The module on position 3 implements the muting function. Refer to the operating instructions for detailed notes on the functions.

The user must make sure to only connect sensors that can be muted to the sensor card that is assigned to the muting module. These are, for example, light barriers or light grids.

## Operating modes

By default, the restart interlock is activated.

Each assembly contains DIP switches for selecting the functions. For selecting functions, 2 selector switches must always be actuated.

Switches on the first assembly:

Switch	Position	Operating mode
1 and 3	OFF	Without restart interlock (restart, RI)
	ON	With restart interlock (restart, RI)
2 and 4	OFF	Without relay monitor (RM)
	ON	With relay monitor (RM)

Switches on the second assembly:

The assembly contains 6 DIP switches for selecting the sensor type and the position. Six possibilities are offered for combining sensors. The desired combination is to be set binary. For function selection, always 2 switches must be actuated, that means DIP switches 1 - 3 have the same switch position as DIP switches 4 - 6.

DIP switch			Operating mode
3 and 6	2 and 5	1 and 4	
0	0	0	SLA /SLP/bridge channel 1 + 2 and channel 3 + 4
0	0	1	SLA /SLP/bridge on channel 1 + 2 and SLC channel 3 + 4
0	1	0	SLC channel 1 + 2 and channel 3 + 4
0	1	1	SLA /SLP/bridge channel 1 + 2 and safety mat channel 3 + 4
1	0	0	Safety mat channel 1 + 2 and channel 3 + 4
1	0	1	SLC channel 1 + 2 and safety mat channel 3 + 4

Switches on the third assembly:

Switch	Position	Operating mode
1 Group 1 and 2	OFF	Muting lamp monitoring inactive
	ON	Muting lamp monitoring active
2 Group 1 and 2	OFF	Single muting
	ON	Double muting
3 Group 1 and 2	OFF	Time window-limited muting
	ON	Protection beam-limited muting
4 Group 1 and 2	OFF	Sequential muting
	ON	Parallel muting

## Displays

The OSSD-R/supply module on position 1 has a red/green LED for indicating the OSSD on/off statuses, a yellow LED for the start-ready status and a 7 segment display for system diagnosis.

The 7 segment display indicates the status and the error codes of the system.

Display	7 segment display
1	DIP switch positions differ
2	Incorrect configuration
3	Time-out at one or more muting sensors
4	Transmitter error
6	Muting lamp error
7	Simultaneousness monitoring error
8	Receiver error
9	Error at sensor channel
C	Error at sensor channel
E	System error
F	Relay monitor error
H	Selection chain error
L	Configuration error
U	Low voltage or voltage surge detected

Release date: 2011-06-15 14:42 Date of issue: 2011-06-27 192147\_eng.xml