

inspired LED 10mm iDea Series Panels on Demand



The **iDea Series LED System** offers a variety of quick convenient solutions for designing, installing, and modifying LED systems in field. Simply cut LED flex strips to length, snap on connectors, lay the LEDs along an aluminum channel, and snap your choice of covers in to place. Creating custom LED fixtures has never been easier than with the innovative iDea Series LED system from Inspired LED.

Product Features:

- Sleek, lightweight design
- Compatible with range of flexible LED colors & brightness levels
- Frosted white or clear lens covers
- Build to custom lengths
- Clip, screw, or adhesive mounting options
- Can be weatherproofed in-field with addition of GE Lifetime Rated Silicone

Step 1: Cut

Select Inspired LED flex strips in the brightness level and color of your choosing, then cut to length on copper solder pads!

Mega Bright (240 ohm) 24V-MB240-XX
best for subtle accent or task lighting


Mega Bright (100 ohm) 24V-MB100-XX
best value accent or task lighting

Mega Bright (75 ohm) 24V-MB75-XX
the very brightest task light



Step 2: Connect

Attach iDea series end-connectors to connect to wire

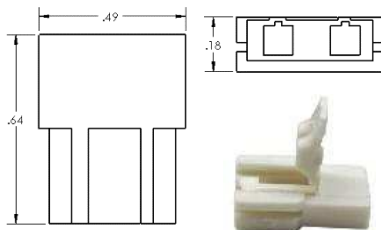

Size: 0.49" x 0.64" x 0.18"
Screw Terminal Size: Fits 18-22 AWG
SKU#: 3636 (single) 3683 (bag of 25)
Compatible with Inspired LED 24V Flex Only

1 Open connector locking cap and peel adhesive liner from flexible LED strip.



2 Insert flexible LED strip into LED input channel of connector.



3 Close locking cap until the snap of the connector is heard. The snapping sound indicates the locking cap has been properly terminated.



4 Identify polarity on LED strip. Polarity is marked throughout the length of the flexible LED strip. Use a red sharpie to mark polarity on connector.



5 Strip 18-22AWG cable and match polarity between LED connector and cable.




6 Poke cable leads into wire holes of connector making sure the positive polarity matches the positive input hole of connector.



NOTE: Connectors are not assigned polarity. Polarity must be defined by user. Look throughout the length of the strip to identify polarity, it may not be indicated exactly at each cut point. Check termination by tugging on the cable leads and LED flex to insure tight connections. Cable should be difficult to remove when properly terminated.

Step 2: Connect (Part II)

Attach iDea series mid-connectors to connect flex end to end

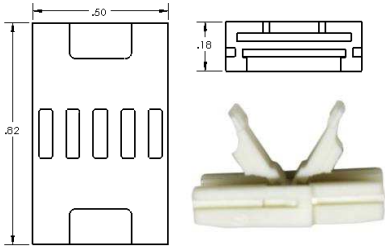

Size: 0.82" x 0.5" x 0.18"

Screw Terminal Size: Fits 18-22 AWG

SKU#: 3637 (single) 3684 (bag of 5)

Compatible with Inspired LED 24V Flex Only

- 1 Match polarity between joining LED strips



- 3 Mark polarity using a RED sharpie pen and insert flex on each side



- 2 Open locking caps on each side of mid-connector



- 4 Firmly snap each end of mid-connector shut



Step 3: Panelize

Create an on-demand fixture in just minutes using aluminum extrusion and snap-on lenses




- 1 Aluminum Channel (6'): 3606

Lay flex along aluminum channel with end connectors hanging over edge & cut to length



- 2 Polycarbonate Covers (6'): 3633

Snap cover over aluminum & end connectors, cut to length



White 3633-W

Clear 3633-C

- 3 Mounting Clips/Screws (10/bag): 3687

Screw into desired location, then secure iDea series panel in place

