

Type SMM

Square Ceramic Surface Mount Medium Blow Fuse

3812 Size
RoHS 6 Compliant



SMM Series Fuse



Features

- Medium Blow
- Surface mount high current fuse
- Current rating from 20A to 30A
- Wide operating temperature range from -55°C to 125°C
- Tape and Reel for auto-insert SMD process
- Compatible with reflow process
- Halogen Free
- Leadfree

Applications

- Voltage regulator module
- PC server
- Office electronic equipment
- Industrial equipment
- Medical equipment
- POE, POE+
- Power supply
- DC-DC Converter

HALOGEN FREE =

LEAD FREE =

Electrical Characteristics (UL / CSA / STD.248-14)

Testing Current	Blow Time	
	Minimum	Maximum
100%	4 Hrs.	N/A
200%	N/A	60 Sec

Safety Agency Approvals

SAFETY AGENCY	SAFETY AGENCY CERTIFICATE	AMPERE RANGE / VOLT @ I.R.ABILITY
	E20624	20A - 30A / 250V @100A AC 125V @ 150A AC 72V @ 130A DC 65V @ 300A DC
		20A - 30A / 250V @100A AC 125V @ 150A AC 72V @ 130A DC 65V @ 300A DC

Specifications Subject to change without notice.

Type SMM

Square Ceramic Surface Mount Medium Blow Fuse

3812 Size
RoHS 6 Compliant
HF Pb

bel

SMM May2012C

Electrical Specifications

Catalog Number	Ampere Rating (A)	Nominal Cold Resistance (ohm)	Nominal Volt-drop @100% In (volt)	Interrupting Rating	Max. Voltage Rating (V)	Melting I ² T @ 10 In (A ² Sec) Min.	Nominal Power Dissipation (W)	Agency Approvals	
								UL	CE
SMM 20	20A	0.0025	0.09	20A - 30A / 250V @100A AC 125V @ 150A AC 72V @ 130A DC 65V @ 300A DC	250	270	1.8	Y	Y
SMM 25	25A	0.0019	0.08		250	420	2.0	Y	Y
SMM 30	30A	0.0013	0.07		250	1000	2.1	Y	Y

Soldering Guidelines

Reflow Conditions Recommended: 240°C, 30 sec. max.

Pb-Free Process Compatibility:

When soldered to test boards using IR reflow in accordance with JEDEC J-STD-020 (260°C, 40 sec. max.), SMM samples exhibited DCR change of +10% to -20% from initial values.

Subsequent tests showed all samples complied with the stated electrical characteristics on this data sheet.

NOT Recommended for Wave solder / Direct immersion / Hand Solder

NOTES:

Test Conditions

For all SMM data, as well as UL Component investigation, all tests were conducted with fuse samples soldered on a PCB (1.6mm thick) test board with copper traces measuring 0.1 mm nominal thickness (3 oz.clad), 10mm wide and 100 mm overall length.

– UL Condition of Acceptability

- the following information is contained in the UL Component Recognition for SMM Fuse Series:

The maximum temperature recorded in open air was 100 °C in a 21 °C ambient (79 °C rise). Consideration should be given to checking operating temperatures in end-use application with regard to thermal index of surrounding materials and components.


(Maximum temperature recorded at 80% of rating (24A) for the SMM30 rating was 69°C (48 °C rise).

Caution:


-Minimum fusing point:

The SMM Series fuses are NOT intended to be operated at currents between 100% and 200% of ampere rating. Prolonged operation at currents in this range may result in overheating of the fuse and/or desoldering of the fuse caps from the PCB pad.

Temperature Derating Curve

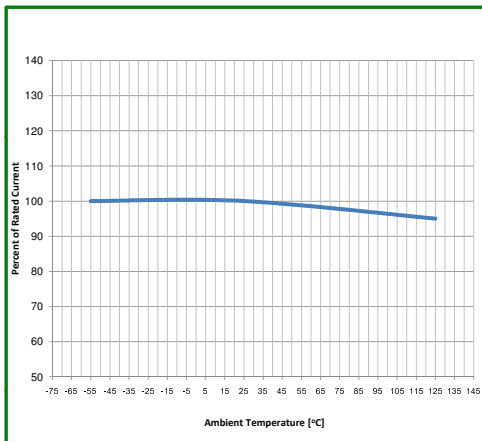

Average Time Current Curve

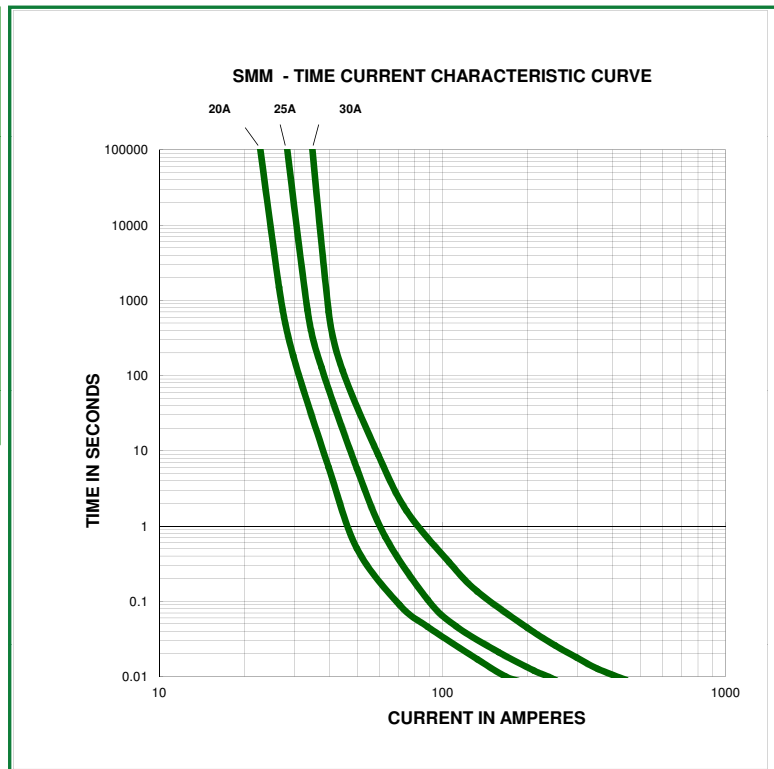

Specifications Subject to change without notice.

CORPORATE OFFICE
Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
E-Mail: belfuse@belf.com
Website: www. belfuse.com


FAR EAST OFFICE
Bel Fuse Ltd.
8/F Luk Hop Industrial Building
8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706

EUROPE OFFICE
Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite F15
Preston, Lancashire, PR1 8UQ
United Kingdom
Tel 44-1772-556601
Fax 44-1772-561008

EUROPE
Bel Stewart GmbH
Industriestrasse 20
61381 Friedrichsdorf
Germany
Tel 49-6172-9552-0
Fax 49-6172-9552-40

Soldering Parameters

IR Reflow Profile	
Reflow Parameter	
Minimum preheat temperature(TsMIN)	130°C
Maximum preheat temperature(TsMAX)	170°C
Preheat Time	60-180 seconds
TsMAX to TL ramp-up rate	3°C / second max.
Time above temperature TL(tL)	200 °C 60-120 seconds
Peak Temperature (TP)	240 °C max.
Time Within +0 °C / -5°C of Peak TP	20 - 30 seconds.
Ramp-down rate	6°C / second max.

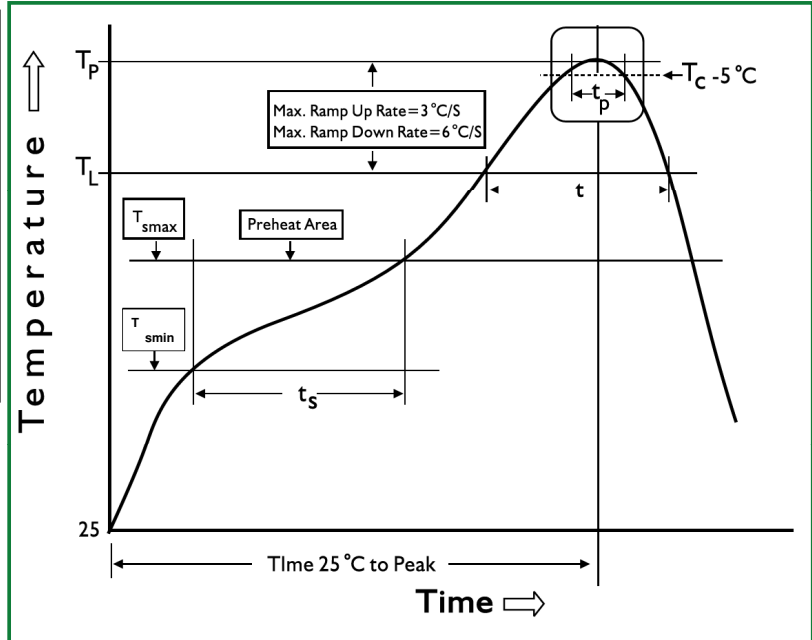

Type SMM

Square Ceramic Surface Mount Medium Blow Fuse

3812 Size
RoHS 6 Compliant



SMM May2012D


Physical Specifications

Materials	Body : Ceramic
	Terminations: Matte Tin Plated Brass Caps (100% Lead -free)
Marking	On Fuse:
	" bel ", "Current Rating" in black color
	On label:
	"bel" , "SMM", "Current Rating", "Voltage Rating", "Interrupting Rating", "Appropriate Safety Logos" and " ", " " (China RoHS compliant).


Environmental Specifications

Shock Resistance	MIL-STD-202G, Method 213B, Test Condition I (100 G's peak for 6 milliseconds; Sawtooth Waveform)
Vibration Resistance	MIL-STD-202G, Method 201A (10-55 Hz, 0.06 inch, total excursion).
Salt Spray Resistance	MIL-STD-202G, Method 101E, Test condition B (48 hrs).
Insulation Resistance	MIL-STD-202G, Method 302, Test Condition A (After Opening) 10,000 ohms minimum.
Solderability	MIL-STD-202G, Method 208H
Resistance to solder Heat	MIL-STD-202G Method 210F
Thermal Shock	MIL-STD-202G, Method 107G, Test Condition B (-65°C to +125°C).
Operating Temperature	-55°C to +125°C

Mechanical Dimensions

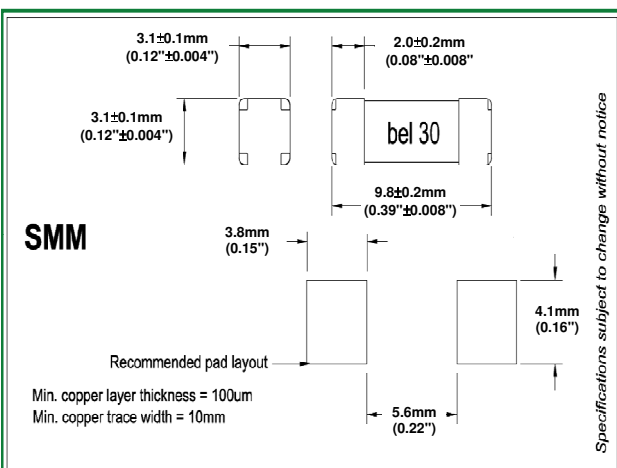

Ordering Information

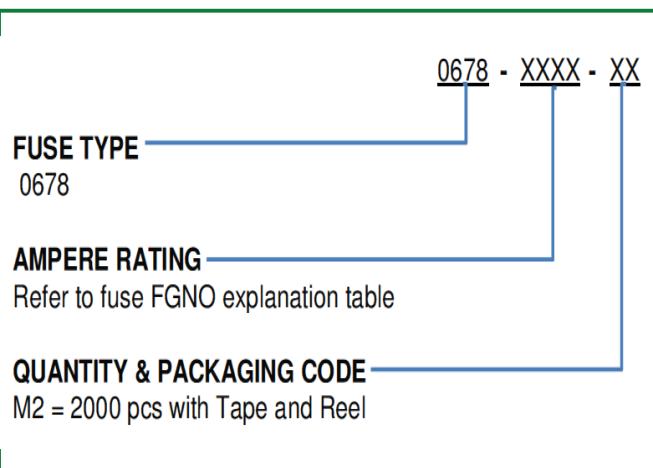

Packaging

Packaging Tape & Reel	Packaging Specification	Quantity	Quantity & Packaging Code
16 mm wide tape with 13 inches Diameter reel	EIA Standard 481-D	2000	0678-XXXX-M2

CORPORATE OFFICE
Bel Fuse Inc.
206 Van Vorst Street
Jersey City, NJ 07302
Tel 201-432-0463
Fax 201-432-9542
E-Mail: belfuse@belf.com
Website: www.belfuse.com

FAR EAST OFFICE
Bel Fuse Ltd.
8/F Luk Hop Industrial Building
8 Luk Hop Street
San Po Kong
Kowloon, Hong Kong
Tel 852-2328-5515
Fax 852-2352-3706

EUROPE OFFICE
Bel Fuse Europe Ltd.
Preston Technology Management Centre
Marsh Lane, Suite F15
Preston, Lancashire, PR1 8UQ
United Kingdom
Tel 44-1772-556601
Fax 44-1772-561008

EUROPE
Bel Stewart GmbH
Industriestrasse 20
61381 Friedrichsdorf
Germany
Tel 49-6172-9552-0
Fax 49-6172-9552-40