

LMax SMD Power Inductor



LMXS Series – Shielded Style J


FEATURES

- Directly connected electrode on ferrite core
- High power, High saturation inductors
- Ideal inductors for DC/DC converters
- Magnetically shielded against radiation
- Available on tape and reel for automatic surface mounting

APPLICATIONS

- Power Supply for VTRs
- LCD Televisions
- Notebook PCs
- Portable Communication
- DC/DC Converters, etc.

DIMENSIONS

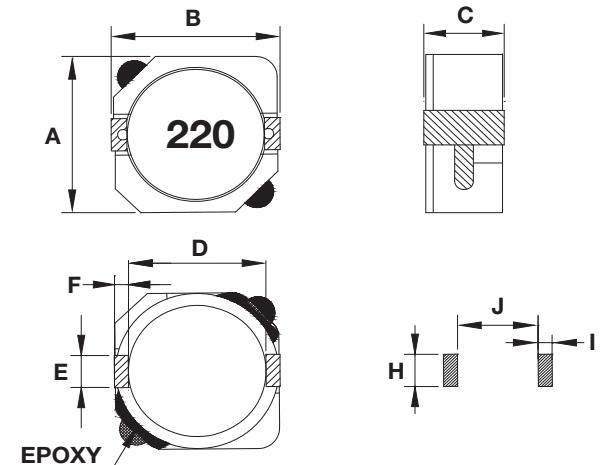

mm (inches)

Type	A max.	B max.	C max.	D	E	F	H	I	J
0606	6.20 (0.244)	6.30 (0.248)	3.00 (0.118)	4.70 (0.185)	2.00 (0.079)	0.60 (0.024)	2.60 (0.102)	1.00 (0.039)	4.60 (0.181)
1010	10.3 (0.406)	10.4 (0.409)	3.10 (0.122)	7.70 (0.303)	3.00 (0.118)	1.20 (0.047)	3.20 (0.126)	1.60 (0.063)	7.30 (0.287)
101D	10.3 (0.406)	10.4 (0.409)	4.00 (0.157)	7.70 (0.303)	3.00 (0.118)	1.20 (0.047)	3.20 (0.126)	1.60 (0.063)	7.30 (0.287)
101E	10.3 (0.406)	10.4 (0.409)	5.00 (0.197)	7.70 (0.303)	3.00 (0.118)	1.20 (0.047)	3.20 (0.126)	1.60 (0.063)	7.30 (0.287)

HOW TO ORDER

LM	XS	0606	N	R04	J	T	A	S
Family LM = Power Inductor	Series XS = Shielded	Size 0606 = 6x6xh 1010 = 10x10xh 101D = 10x10xD(h) (h = see catalog)	Tolerance N = $\pm 30\%$	Inductance R04 = 0.039 μ H R39 = 0.390 μ H 3R9 = 3.900 μ H 390 = 39.00 μ H 391 = 390.0 μ H 392 = 3900 μ H	Style J = Sn Plate	Termination T = Sn Plate	Special A = Standard	Packaging S = 13" Reel



LMax SMD Power Inductor



LMXS Series – Shielded Style J

0606/1010/101D/101E

Codes	L (μ H)	Tolerance	Test Condition	DCR (Ω) max.				IDC (A) max.			
				0606	1010	101D	101E	0606	1010	101D	101E
1R3	1.3	N	100KHz, 0.1V	—	—	8	—	—	—	10.0	—
1R5	1.5	N	100KHz, 0.1V	—	—	8	6	—	—	10.0	10.5
2R2	2.2	N	100KHz, 0.1V	—	—	11	7	—	—	8.00	9.25
2R5	2.5	N	100KHz, 0.1V	17.6	—	12	—	2.60	—	7.50	—
3R3	3.3	N	100KHz, 0.1V	20.3	—	13	10	2.30	—	6.50	7.80
3R8	3.8	N	100KHz, 0.1V	—	—	17	—	—	—	6.00	—
4R0	4.0	N	100KHz, 0.1V	27.0	—	—	—	2.10	—	—	—
4R7	4.7	N	100KHz, 0.1V	—	—	21	12	—	—	5.70	6.40
5R0	5.0	N	100KHz, 0.1V	31.1	—	—	—	1.85	—	—	—
5R2	5.2	N	100KHz, 0.1V	—	—	22	—	—	—	5.50	—
5R6	5.6	N	100KHz, 0.1V	—	—	25	—	—	—	5.20	—
6R0	6.0	N	100KHz, 0.1V	41.9	—	—	—	1.70	—	—	—
6R8	6.8	N	100KHz, 0.1V	—	—	26	18	—	—	4.90	5.40
7R0	7.0	N	100KHz, 0.1V	—	—	27	—	—	—	4.80	—
8R0	8.0	N	100KHz, 0.1V	49.9	—	—	—	1.50	—	—	—
8R2	8.2	N	100KHz, 0.1V	—	—	—	20	—	—	—	4.85
100	10	N	100KHz, 0.1V	54.0	58	35	26	1.30	2.70	4.40	3.45
120	12	N	100KHz, 0.1V	71.6	72	—	33	1.20	2.25	—	3.40
150	15	N	100KHz, 0.1V	82.4	86	50	41	1.10	2.22	3.60	2.83
180	18	N	100KHz, 0.1V	101.5	116	—	46	1.05	1.90	—	2.62
220	22	N	100KHz, 0.1V	119.0	145	73	61	0.95	1.78	2.90	2.44
270	27	N	100KHz, 0.1V	146.0	176	83	69	0.85	1.63	2.80	2.24
330	33	N	100KHz, 0.1V	182.5	213	93	84	0.76	1.46	2.30	1.88
390	39	N	100KHz, 0.1V	209.5	270	—	106	0.68	1.32	—	1.70
470	47	N	100KHz, 0.1V	229.5	299	128	130	0.60	1.18	2.10	1.56
560	56	N	100KHz, 0.1V	305.0	335	—	149	0.55	1.10	—	1.39
680	68	N	100KHz, 0.1V	351.0	451	213	201	0.48	1.04	1.50	1.36
820	82	N	100KHz, 0.1V	418.5	513	—	227	0.45	0.94	—	1.20
101	100	N	100KHz, 0.1V	520.0	700	304	253	0.40	0.84	1.35	1.09
121	120	N	100KHz, 0.1V	—	765	—	303	—	0.76	—	1.00
151	150	N	100KHz, 0.1V	—	876	506	370	—	0.70	1.15	0.91
181	180	N	100KHz, 0.1V	—	—	631	419	—	—	1.03	0.84
221	220	N	100KHz, 0.1V	—	—	756	500	—	—	0.92	0.75
271	270	N	100KHz, 0.1V	—	—	—	672	—	—	—	0.68
331	330	N	100KHz, 0.1V	—	—	1090	812	—	—	0.70	0.60
391	390	N	100KHz, 0.1V	—	—	—	953	—	—	—	0.57
471	470	N	100KHz, 0.1V	—	—	—	1289	—	—	—	0.50
561	560	N	100KHz, 0.1V	—	—	—	1430	—	—	—	0.47
681	680	N	100KHz, 0.1V	—	—	—	1599	—	—	—	0.43
821	820	N	100KHz, 0.1V	—	—	—	1768	—	—	—	0.39
102	1000	N	100KHz, 0.1V	—	—	—	1989	—	—	—	0.35