

**OZRA1007D**



**Application**

High Current Applications

**Product Features**

Very High Hold Currents, Low DCR Resistance

**Operating (Hold Current) Range**

3 A ~ 14A

**Maximum Voltage**

16V

**Temperature Range**

-40°C to 85°C

**Agency Approval**


TUV (Std. EN60738-1-1, Cert. R50102187)

UL Component (Std. UL1434, File E305051)

UL Conditions of Acceptability:

1. These devices have been investigated for use in safety circuits and are suitable as a limiting device.

**Product Dimensions**

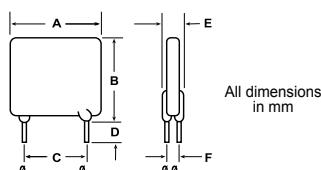

Part Number	Lead Size ∅	A	B	C	D	E	F
		Max	Max	Typical	Min	Max	Typical
OZRA0300FF	0.81	7.1	11.0	5.1	7.6	3.0	1.2
OZRA0400FF	0.81	8.9	12.8	5.1	7.6	3.0	1.2
OZRA0500FF	0.81	10.4	14.3	5.1	7.6	3.0	1.2
OZRA0600FF	0.81	10.7	17.1	5.1	7.6	3.0	1.2
OZRA0700FF	0.81	11.2	19.7	5.1	7.6	3.0	1.2
OZRA0800FF	0.81	12.7	20.9	5.1	7.6	3.0	1.2
OZRA0900FF	0.81	14.0	21.7	5.1	7.6	3.0	1.2
OZRA1000FF	0.81	16.5	24.1	5.1	7.6	3.0	1.2
OZRA1100FF	0.81	17.5	26.0	5.1	7.6	3.0	1.2
OZRA1200FF	1.00	17.5	28.0	10.2	7.6	3.6	1.4
OZRA1400FF	1.00	27.9	27.9	10.2	7.6	3.6	1.4

**Standard Package**

P/N	Bulk		Reel/Tape	
	Pcs/Box	P/N Code	Pcs/Reel	P/N Code
OZRA0300FF	2000	1C	2500	2D
OZRA0400FF-0600FF	3000	1E	2500	2D
OZRA0700FF-1400FF	1000	1A	n/a	n/a

**Radial Leaded PTC**

**OZRA Series**

RoHS6 Compliant

**Electrical Characteristics (23°C)**

	Part Number (Bulk)	Hold Current	Trip Current	Max Time to Trip @ 5xI <sub>H</sub>	Max Current	Rated Voltage	Typical Power	Resistance Tolerance		
		I <sub>H</sub> , A	I <sub>T</sub> , A	Seconds	I <sub>max</sub> , A	V <sub>max</sub> , V <sub>dc</sub>	P <sub>d</sub> , W	R <sub>min</sub> Ohms	R <sub>max</sub> Ohms	R <sub>1max</sub> Ohms
A	OZRA0300FF1C	3	5.1	2.0	100	16	2.3	0.034	0.0530	0.105
B	OZRA0400FF1E	4	6.8	3.5	100	16	2.4	0.020	0.0350	0.063
C	OZRA0500FF1E	5	8.5	3.6	100	16	2.6	0.014	0.0210	0.044
D	OZRA0600FF1E	6	10.2	5.8	100	16	2.8	0.009	0.0160	0.033
E	OZRA0700FF1A	7	11.9	8.0	100	16	3.0	0.006	0.0130	0.021
F	OZRA0800FF1A	8	13.6	9.0	100	16	3.0	0.005	0.0110	0.018
G	OZRA0900FF1A	9	15.3	12.0	100	16	3.3	0.004	0.0085	0.015
H	OZRA1000FF1A	10	17.0	12.5	100	16	3.3	0.003	0.0075	0.012
I	OZRA1100FF1A	11	18.7	13.5	100	16	3.7	0.003	0.0065	0.010
J	OZRA1200FF1A	12	20.4	16.0	100	16	4.2	0.002	0.0055	0.009
K	OZRA1400FF1A	14	23.8	20.0	100	16	4.6	0.002	0.0045	0.008

**I<sub>H</sub>** Hold current-maximum current at which the device will not trip in still air at 23°C.

**I<sub>T</sub>** Trip current-minimum current at which the device will always trip in still air at 23°C.

**I<sub>max</sub>** Maximum fault current device can withstand without damage at rated voltage (V<sub>max</sub>).

**V<sub>max</sub>** Maximum voltage device can withstand without damage at its rated current.

**P<sub>d</sub>** Typical power dissipated by device when in tripped state in 23°C still air environment.

**R<sub>min</sub>** Minimum device resistance at 23°C.

**R<sub>max</sub>** Maximum device resistance at 23°C.

**R<sub>1max</sub>** Maximum device resistance at 23°C, 1 hour after initial device trip.

**Physical specifications**

**Lead material**

OZRA0300 ~ OZRA1100 - Tin plated copper, 20 AWG.

OZRA1200 ~ OZRA1400 - Tin plated copper, 18 AWG.

**Soldering characteristics**

MIL-STD-202, Method 208E.

**Insulating coating**

Flame retardant epoxy, meets UL-94-V-0 requirements.

**PTC Marking**

"bel" or "b", I<sub>H</sub> code and "RA".

defining a degree of excellence



# Radial Leaded PTC


## 0ZRA Series

RoHS6 Compliant


0ZRA1007C

### Typical Time - To - Trip at 23°C

(See Elec. Characteristics Table for P/N - Curve Correlation)

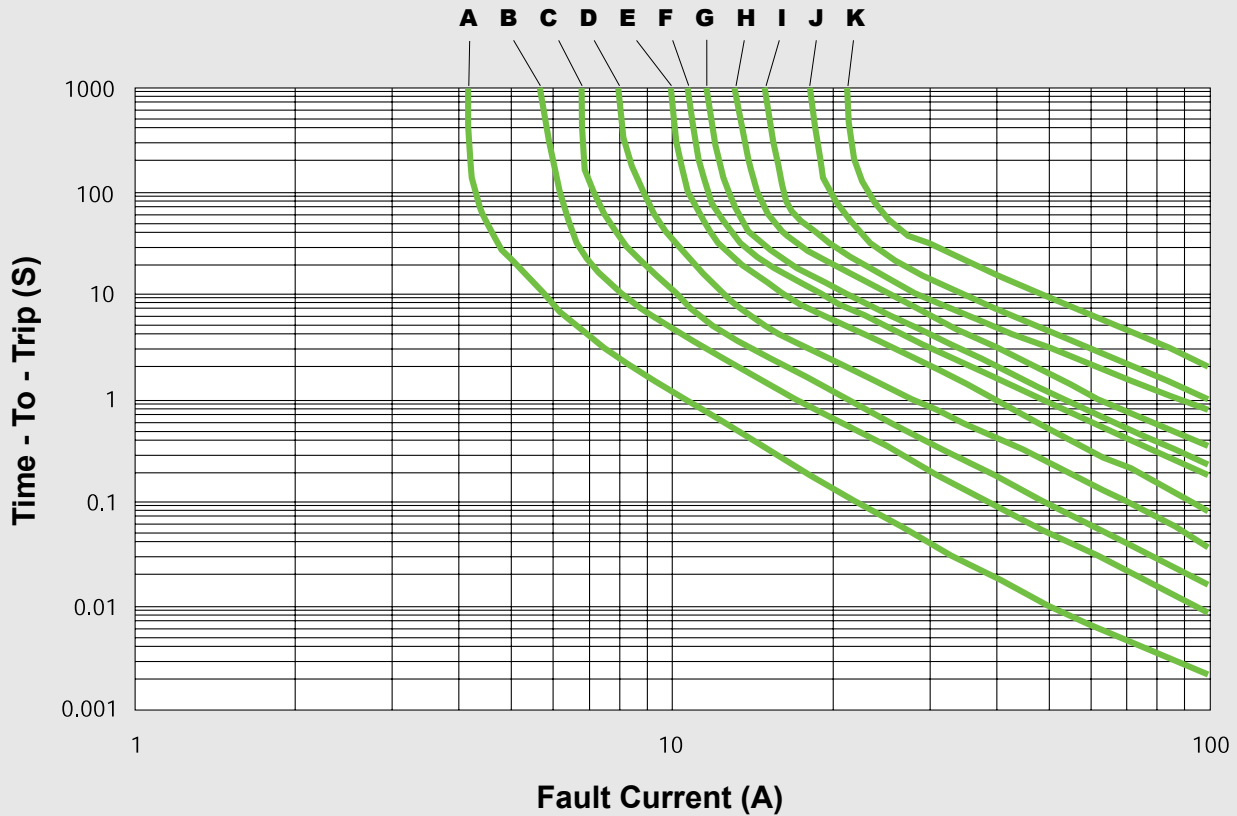

### Thermal Derating Curve

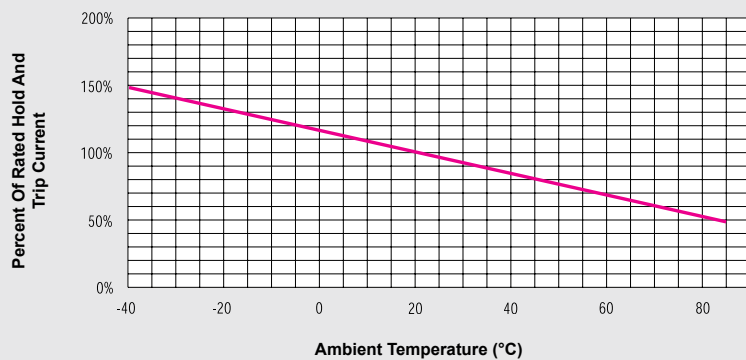

### Cautionary Notes

1. Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
2. These Polymer PTC (PPTC) devices are intended for protection against occasional overcurrent/ overtemperature fault conditions and may not be suitable for use in applications where repeated and/ or prolonged fault conditions are anticipated.
3. Avoid contact of PTC device with chemical solvent. Prolonged contact may adversely impact the PTC performance.
4. These PTC devices may not be suitable for use in circuits with a large inductance, as the PTC trip can generate circuit voltage spikes above the PTC rated voltage.

Specifications subject to change without notice

#### Corporate Office Bel Fuse Inc.

206 Van Vorst Street, Jersey City, NJ 07302  
Tel: 201-432-0463  
Fax: 201-432-9542  
E-Mail: [belfuse@belfuse.com](mailto:belfuse@belfuse.com)  
Website: [www.belfuse.com](http://www.belfuse.com)

#### Far East Office Bel Fuse Ltd.

8F/8 Luk Hop Street  
San Po Kong  
Kowloon, Hong Kong  
Tel: 852-2328-5515  
Fax: 852-2352-3706

#### European Office Bel Stewart GmbH

Industriestrasse 20  
61381 Friedrichsdorf  
Germany  
Tel: 49.6172.9552.0  
Fax: 49.6172.9552.40