



#### **Features**

- For GPS applications
- Usable bandwidth of 30 MHz
- Single-ended operation
- Ceramic Surface Mount Package
- Hermetic

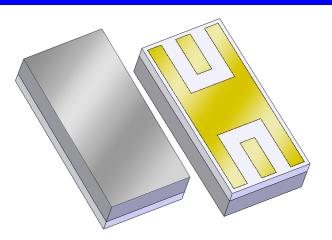

### Package


Surface Mount 3.26 x 1.60 x 0.84 mm

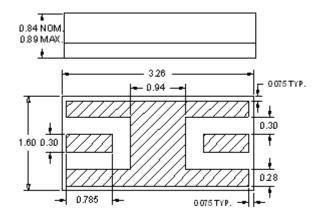

Dimensions shown are nominal in millimeters All tolerances are  $\pm 0.13$ mm except overall length and width  $\pm 0.25$ mm

Overall width, length, and thickness are the only critical dimensions. All other dimensions are for reference only. Body: Sapphire Lid: Alumina Terminations: Au plating 0.5 - 2.5µm, over a 2.0 – 6.0 µm Ni plating **Pin Configuration** 

**Bottom View** 

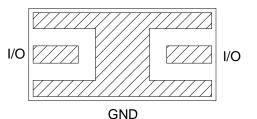

Pin No.	Description		
I/O	Input/Output		
GND	Ground		



### **Electrical Specifications**<sup>(1)</sup>

Operating Temperature Range: <sup>(2)</sup> -4

-40 to +85 °C


Parameter <sup>(3)</sup>	Minimum	Typical	Maximum	Unit
10dB Center Frequency	1570	1575	1580	MHz
Insertion Loss at Fo	-	2.35	3.75	dB
3 dB Bandwidth <sup>(4)</sup>	40	45	-	MHz
40 dB Bandwidth <sup>(4)</sup>	-	120	140	MHz
Amplitude Variation <sup>(4)</sup>				
1565 - 1585 MHz	-	1.2	2	dB
Input/Output VSWR at Fo	-	1.5	2:1	_
Source Impedance	-	50	-	Ω
Load Impedance	-	50	-	Ω

#### Notes:

- 1. All specifications are based on the test circuit shown below
- 2. In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature
- 3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
- 4. Referenced to the insertion loss at center frequency
- 5. Measured as maximum peak to adjacent valley amplitude variation over frequency range.


#### **Test Circuit:**

50 Ω Single-ended Input

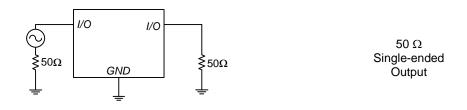




## Typical Performance (at +25°C)

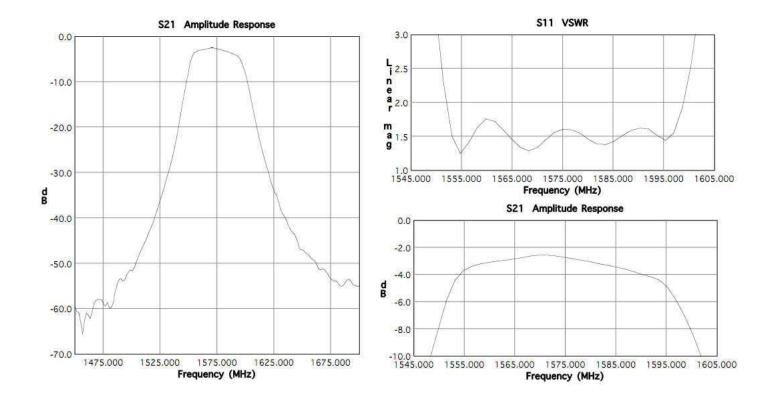



## **Matching Schematics**

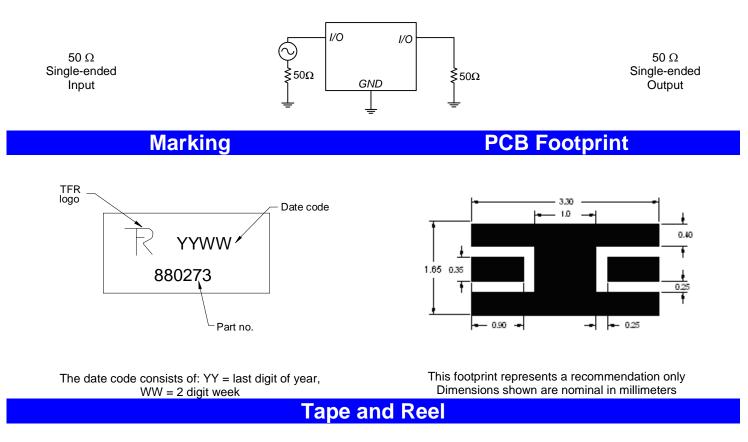

## **Available on Request**



Maximum Ratings							
Parameter	Symbol	Minimum	Maximum	Unit			
Operating Temperature Range	Т	-40	+85	°C			
Storage Temperature Range	T <sub>stg</sub>	-55	+100	°C			

#### Warnings

### Electrostatic Sensitive Device (ESD)

• Avoid ultrasonic exposure

Triquint's liability is limited only to the Bulk Acoustic Wave (BAW) component(s) described in this data sheet. Triquint does not accept any liability for applications, processes, circuits or assemblies, which are implemented using any Triquint component described in this data sheet.



63140 Britta St. Bldg. C Bend, OR 97701 **Contact Information** 

Phone: +1 (972) 994-8465 Fax: +1 (972) 994-8504 Email: <u>custservbend@tqs.com</u> Web: <u>www.triguint.com</u> Or contact one of our worldwide Network of <u>sales offices</u>, <u>Representatives or distributors</u>

Oct 2012