


# Current Transducer LA 205-S/SP30

$I_{PN} = 300 \text{ A}$

For the electronic measurement of currents : DC, AC, pulsed..., with a galvanic isolation between the primary circuit (high power) and the secondary circuit (electronic circuit).



16133



## Electrical data

$I_{PN}$	Primary nominal r.m.s. current	300	A					
$I_P$	Primary current, measuring range	0 .. $\pm 500$	A					
$I_{P \text{ max}}$	Measuring overload <sup>1)</sup>	600	A					
$R_M$	Measuring resistance @	$T_A = 70^\circ\text{C}$		$T_A = 85^\circ\text{C}$				
		$R_{M \text{ min}}$	$R_{M \text{ max}}$	$R_{M \text{ min}}$	$R_{M \text{ max}}$			
		with $\pm 12 \text{ V}$	@ $\pm 300 \text{ A}_{\text{max}}$	0	33	0	31	$\Omega$
			@ $\pm 500 \text{ A}_{\text{max}}$	0	6	0	4	$\Omega$
		with $\pm 15 \text{ V}$	@ $\pm 300 \text{ A}_{\text{max}}$	5	52	5	50	$\Omega$
	@ $\pm 500 \text{ A}_{\text{max}}$	5	17	5	15	$\Omega$		
$I_{SN}$	Secondary nominal r.m.s. current	150	mA					
$K_N$	Conversion ratio	1 : 2000						
$V_C$	Supply voltage ( $\pm 5 \%$ )	$\pm 12 \dots 15$	V					
$I_C$	Current consumption	20 (@ $\pm 15 \text{ V}$ ) + $I_S$	mA					
$V_b$	R.m.s. rated voltage <sup>2)</sup> , safe separation	basic isolation	1625	V				
			3250	V				

## Features

- Closed loop (compensated) current transducer using the Hall effect
- Insulated plastic case recognized according to UL 94-V0.

## Special features

- $I_{PN} = 300 \text{ A}$
- $I_P = 0 \dots \pm 500 \text{ A}$
- Connection to secondary circuit on Faston 6.3 x 0.8 mm.

## Advantages

- Excellent accuracy
- Very good linearity
- Low temperature drift
- Optimized response time
- Wide frequency bandwidth
- No insertion losses
- High immunity to external interference
- Current overload capability.

## Accuracy - Dynamic performance data

$X_G$	Overall accuracy @ $I_{PN}$ , $T_A = 25^\circ\text{C}$	$\pm 0.8$	%
$\mathcal{E}_L$	Linearity error	$< 0.1$	%
$I_O$	Offset current @ $I_P = 0$ , $T_A = 25^\circ\text{C}$	Typ	Max
			$\pm 0.15$ mA
$I_{OM}$	Residual current <sup>3)</sup> @ $I_P = 0$ , after an overload of $3 \times I_{PN}$		$\pm 0.50$ mA
$I_{OT}$	Thermal drift of $I_O$ - $10^\circ\text{C} \dots + 85^\circ\text{C}$	$\pm 0.15$	$\pm 0.30$ mA
$t_{ra}$	Reaction time @ 10 % of $I_{PN}$	$< 500$	ns
$t_r$	Response time <sup>4)</sup> @ 90 % of $I_{PN}$	$< 1$	$\mu\text{s}$
$di/dt$	$di/dt$ accurately followed	$> 100$	A/ $\mu\text{s}$
$f$	Frequency bandwidth (- 3 dB)	DC .. 100	kHz

## General data

$T_A$	Ambient operating temperature	- 10 .. + 85	$^\circ\text{C}$
$T_S$	Ambient storage temperature	- 40 .. + 90	$^\circ\text{C}$
$R_S$	Secondary coil resistance @	$T_A = 70^\circ\text{C}$	35 $\Omega$
		$T_A = 85^\circ\text{C}$	37 $\Omega$
$m$	Mass		110 g
		Standards	EN 50178 : 1997

Notes : <sup>1)</sup> 3 mn/hour @  $V_C = \pm 15 \text{ V}$ ,  $R_M = 5 \Omega$

<sup>2)</sup> Pollution class 2. With a non insulated primary bar which fills the through-hole

<sup>3)</sup> The result of the coercive field of the magnetic circuit


<sup>4)</sup> With a  $di/dt$  of 100 A/ $\mu\text{s}$ .

## Applications

- AC variable speed drives and servo motor drives
- Static converters for DC motor drives
- Battery supplied applications
- Uninterruptible Power Supplies (UPS)
- Switched Mode Power Supplies (SMPS)
- Power supplies for welding applications.

060531/2

## Dimensions LA 205-S/SP30 (in mm. 1 mm = 0.0394 inch)

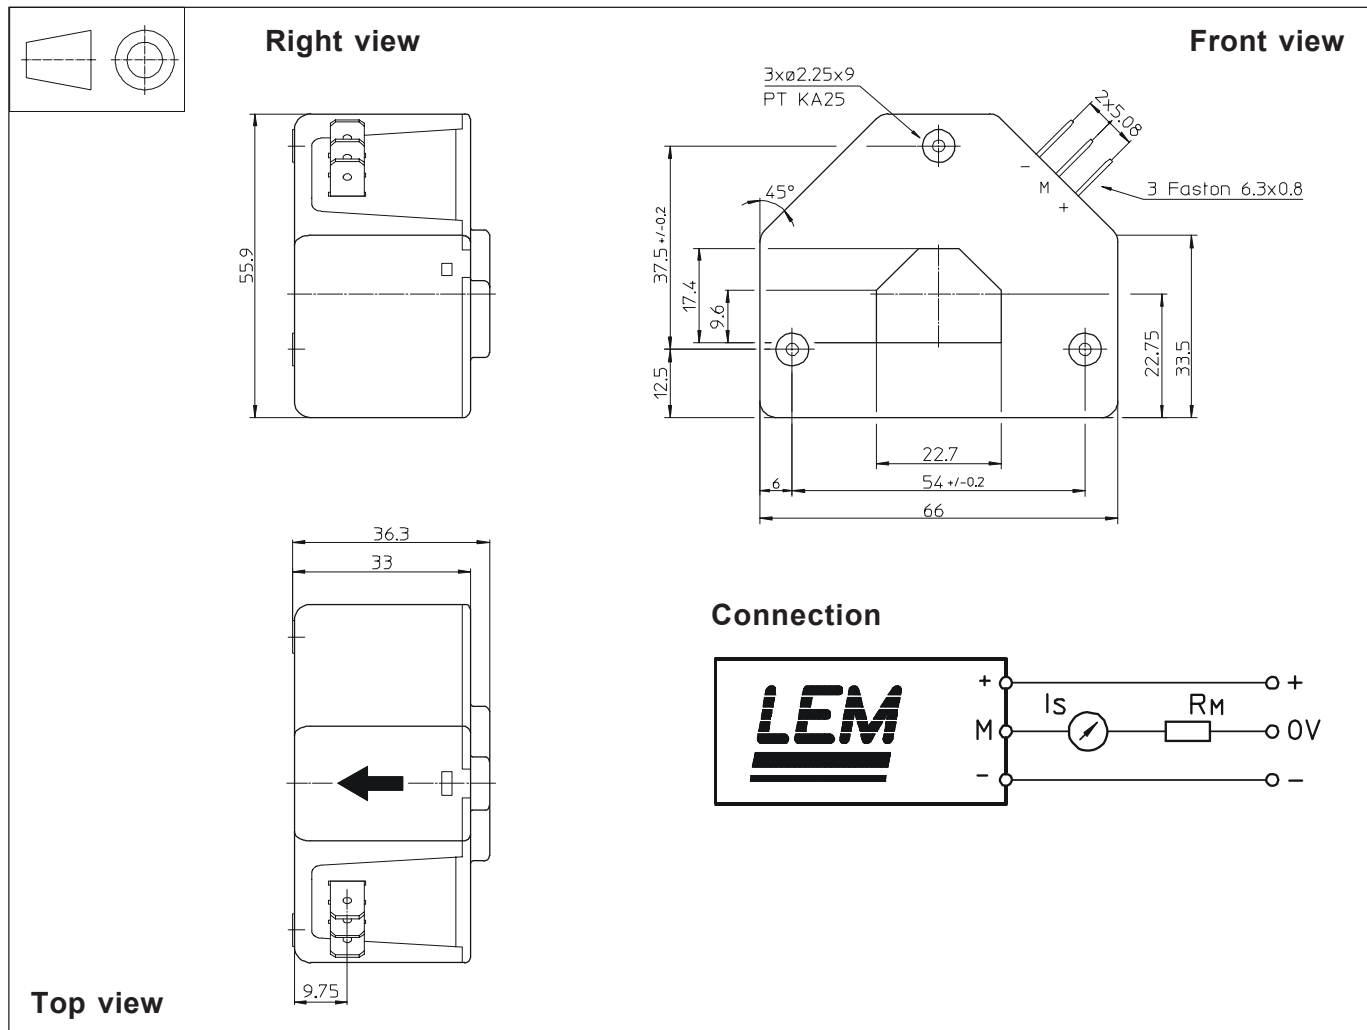

### Mechanical characteristics

- General tolerance  $\pm 0.5$  mm
- Transducer fastening 3 holes  $\varnothing 2.25$  mm
- Fastening torque max 0.8 Nm
- Primary through-hole 22.7 x 17.4 mm
- Connection of secondary Faston 6.3 x 0.8 mm

### Remarks

- $I_s$  is negative when  $I_p$  flows in the direction of the arrow.
- Temperature of the primary conductor should not exceed 100°C.
- Dynamic performances ( $di/dt$  and response time) are best with a single bar completely filling the primary hole.