


856654

1747.5 MHz SAW Filter

Applications

- General purpose wireless
- Wireless infrastructure
- 3G, 4G, Multistandard
- Repeaters

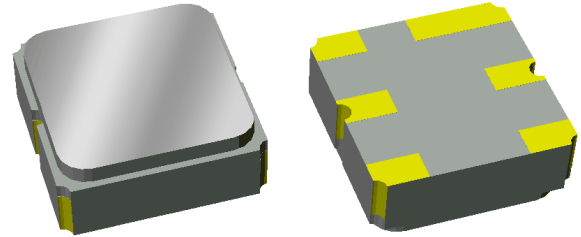


Product Features

- Usable bandwidth 75 MHz
- Single-ended operation
- Ceramic Surface Mount Package (SMP)
- Matching required for operation at 50Ω
- Small Size: 3.00 x 3.00 x 1.22 mm
- Hermetically sealed
- **RoHS** compliant, **Pb**-free

Functional Block Diagram

Top view

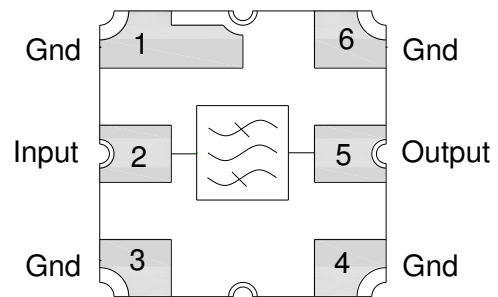

General Description

856654 is a general purpose Uplink filter for band 3. This filter was specifically designed in a 3x3mm hermetic package for base station applications and is part of our wide portfolio of RF filters in the same package.

Low insertion loss, coupled with high attenuation, makes this filter a natural choice for our customers Uplink RF filtering needs.

Pin Configuration

Pin #	SE	Description
2		Input
5		Output
1,3,4,6		Case Ground

Ordering Information

Part No.	Description
856654	packaged part
856654-EVB	evaluation board

Standard T/R size = 5000 units/reel.

Specifications

Electrical Specifications ⁽¹⁾

Specified Temperature Range: ⁽²⁾ -30 to +85 °C

Parameter ⁽³⁾	Conditions	Min	Typical ⁽⁴⁾	Max	Units
Center Frequency		-	1747.5	-	MHz
Maximum Insertion Loss	1710 – 1785 MHz	-	2.2	2.8	dB
Amplitude Ripple	1710 – 1785 MHz	-	-	1.6	dB p-p
Absolute Attenuation ⁽⁵⁾	180 – 220 MHz	38	46	-	dB
	1197 – 1452 MHz	50	54	-	dB
	1606 – 1676 MHz	5.5	7	-	dB
	2100 – 2157 MHz	20	26	-	dB
	2680 – 3005 MHz	15	22	-	dB
	3197 – 6000 MHz	6	9	-	dB
Input/output Return Loss	1710 – 1785 MHz	10	13	-	dB
Source Impedance (single-ended) ⁽⁶⁾		-	50	-	Ω
Load Impedance (single-ended) ⁽⁶⁾		-	50	-	Ω

Notes:

- All specifications are based on the TriQuint schematic for the main reference design shown on page 3
- In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature
- Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
- Typical values are based on average measurements at room temperature
- Relative to minimum insertion Loss
- This is the optimum impedance in order to achieve the performance shown

Absolute Maximum Ratings


Parameter	Rating
Operating Temperature	-30 to +85 °C
Storage Temperature	-40 to +85 °C
Input Power ⁽⁷⁾	+5 dBm

- Device is measured for equivalent 10K hours @ +55 °C [CW Signal]

Operation of this device outside the parameter ranges given above may cause permanent damage.

Reference Design 1 – 50Ω SE Input, 50Ω SE Output


Schematic

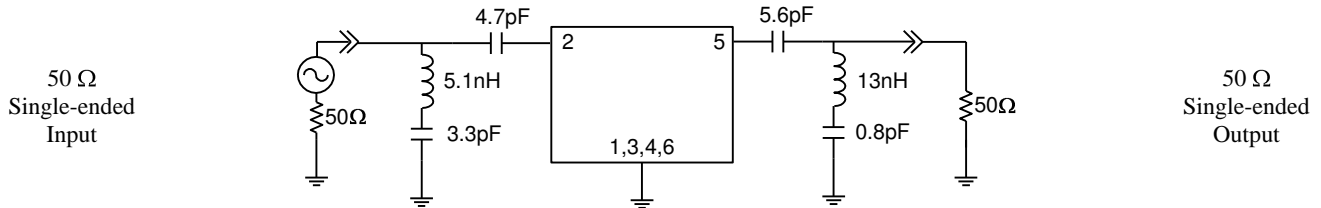

Notes:

1. No impedance matching required
2. Actual matching values may vary due to PCB layout and parasitic


PC Board

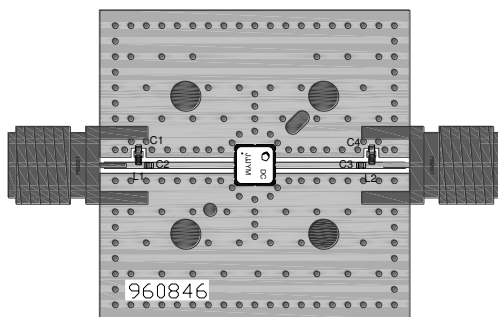

Notes:

- Top, middle & bottom layers: 1/2 oz copper
- Substrates: FR4 dielectric .063” / Taconic TLY-5A .0075”
- Finish plating: Nickel: 3-8µm thick, Gold: .03-.2µm thick
- Hole plating: Copper min .0008µm

Mounting Configuration

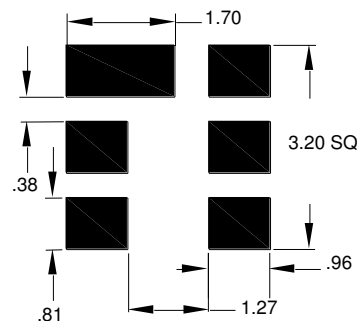







Notes:

1. All dimensions are in millimeters.
2. This footprint represents a recommendation only.

Bill of Material


Reference Desg.	Value	Description	Manufacturer	Part Number
L1	5.1 nH	Coil Wire-wound, 0402, 5%	MuRata	LQW15AN5N1B00
L2	13 nH	Coil Wire-wound, 0402, 5%	MuRata	LQW15AN13NG00
C1	4.7 pF	Chip Ceramic, 0402, 5%	MuRata	GRM15551H2R4GZ01
C2	3.3 pF	Chip Ceramic, 0402, 5%	MuRata	GRM15551H3R3GZ01
C3	5.6 pF	Chip Ceramic, 0402, 5%	MuRata	GRM15551H5R6GZ01
C4	0.8 pF	Chip Ceramic, 0402, 5%	MuRata	GRM15551HR80KZ01
SMA	N/A	SMA connector	Radiall USA Inc.	9602-1111-018
PCB	N/A	3-layer	multiple	960700

Typical Performance (at room temperature)

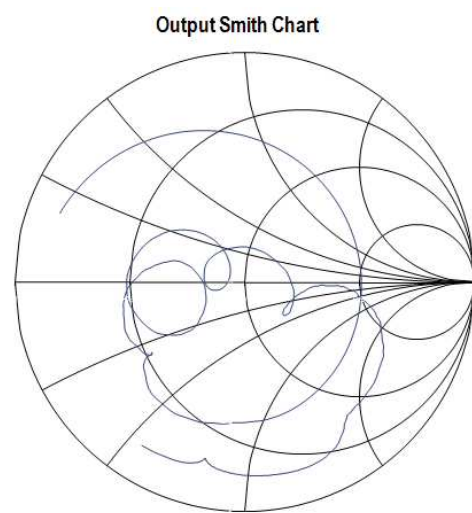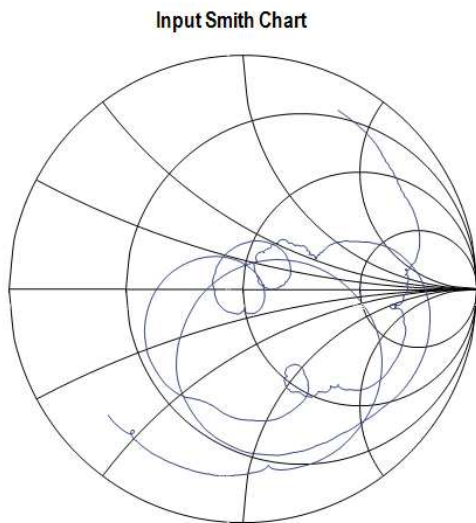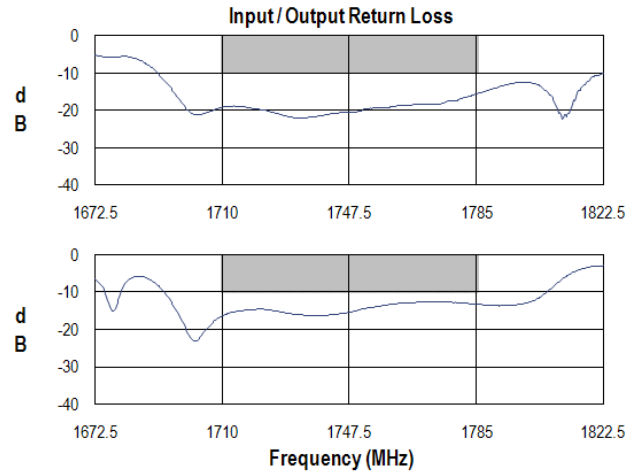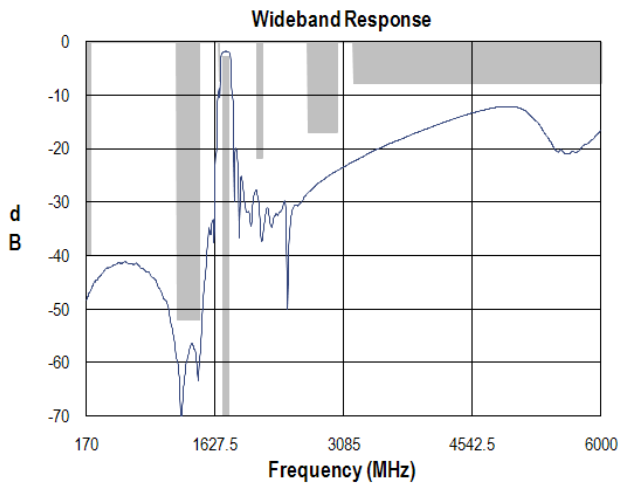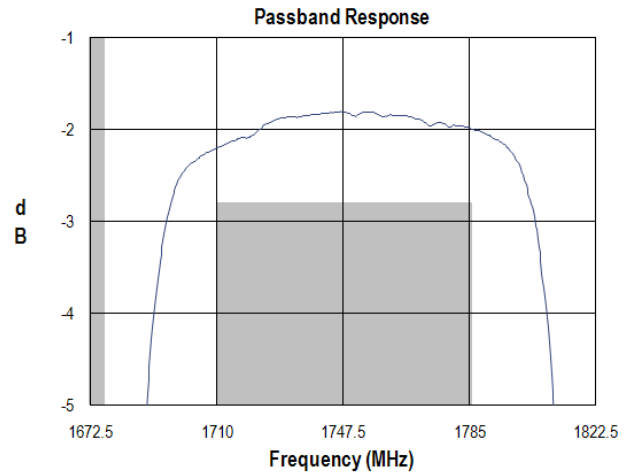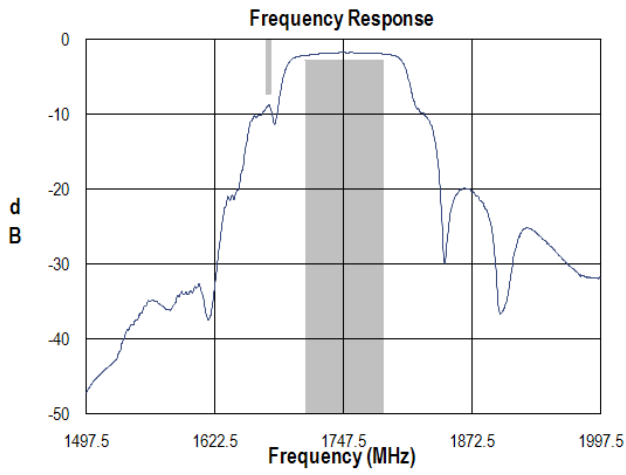

Mechanical Information

Package Information, Dimensions and Marking

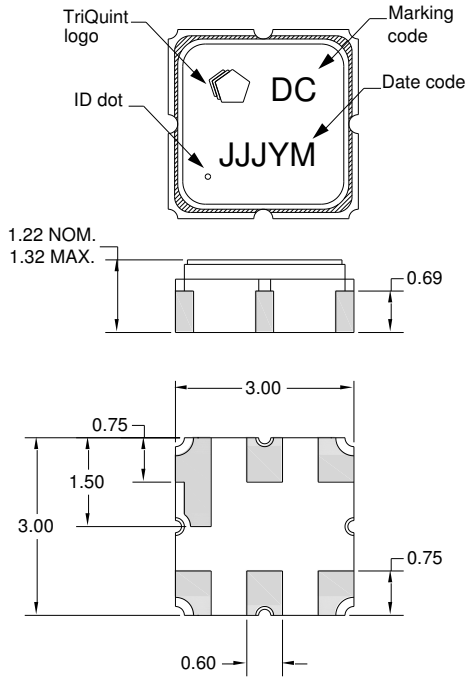

Package Style: SMP-12A
 Dimensions: 3.00 x 3.00 x 1.22 mm



Body: Al₂O₃ ceramic
 Lid: Kovar, Ni plated
 Terminations: Au plating 0.5 - 1.0µm, over a 2-6µm Ni plating

All dimensions shown are nominal in millimeters
 All tolerances are ±0.15mm except overall length and width ±0.10mm

The date code consists of day of the current year (Julian, 3 digits), Y = last digit of the year, and M = manufacturing site code

Tape and Reel Information

Standard T/R size = 5000 units/reel. All dimensions are in millimeters

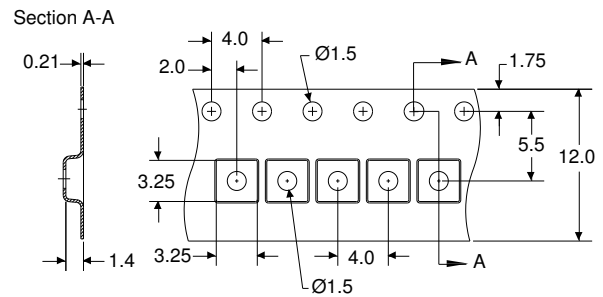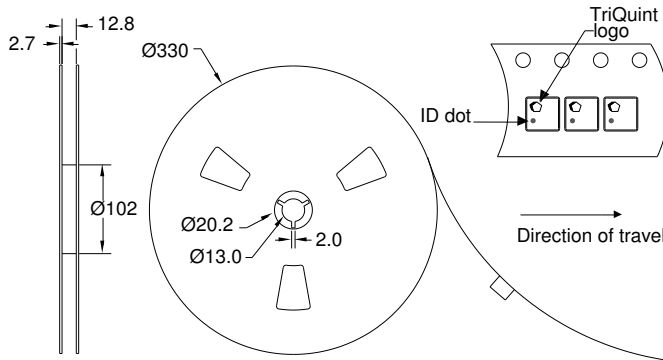

Product Compliance Information

ESD Information



Caution! ESD-Sensitive Device

ESD Rating: 1A

Value: Passes ≥ 300 V min.
Test: Human Body Model (HBM)
Standard: JEDEC Standard JESD22-A114

ESD Rating: A

Value: Passes ≥ 150 V min.
Test: Machine Model (MM)
Standard: JEDEC Standard JESD22-A115

MSL Rating

Devices are Hermetic, therefore MSL is not applicable

Solderability

Compatible with the latest version of J-STD-020, lead free solder, 260°C

Refer to [Soldering Profile](#) for recommended guidelines.

This part is compliant with EU 2002/95/EC RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment).

This product also has the following attributes:

- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A (C₁₅H₁₂Br₄O₂) Free
- PFOS Free
- SVHC Free

Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations, and information about TriQuint:

Web: www.triquint.com Tel: +1.407.886.8860
Email: info-sales@tqs.com Fax: +1.407.886.7061

For technical questions and application information:

Email: flapplication.engineering@tqs.com

Important Notice

The information contained herein is believed to be reliable. TriQuint makes no warranties regarding the information contained herein. TriQuint assumes no responsibility or liability whatsoever for any of the information contained herein. TriQuint assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for TriQuint products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

TriQuint products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.