


# 857038

## 836.5 MHz SAW Filter

### Applications

- For CDMA applications
- For Automotive Telematics applications

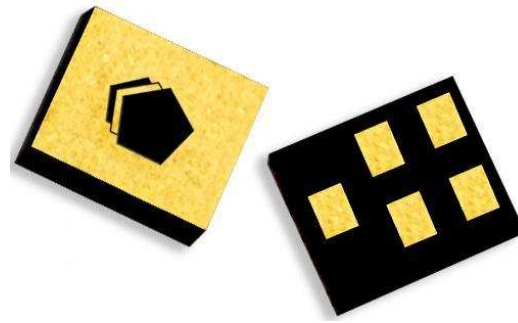

### Product Features

- Usable bandwidth 25 MHz
- Single-ended operation
- Ceramic chip-scale Package (CSP)
- Qualified for automotive applications
- Small Size: 1.40 x 1.20 x 0.46 mm
- Hermetically Sealed
- **RoHS** compliant, **Pb**-free

### General Description


857038 is an 836.5 MHz CDMA filter with low insertion loss & excellent rejection.

857038 is ideal for automotive telematics applications. It achieves its performance over an extended temperature range and has been qualified to AEC-Q200 requirements. In addition, it is fabricated and packaged in TS-16949-certified facilities.

857038 uses advanced and inexpensive packaging techniques to achieve an extremely compact hermetically sealed 1.2 x 1.4 x 0.46 mm package.

### Functional Block Diagram

Top view

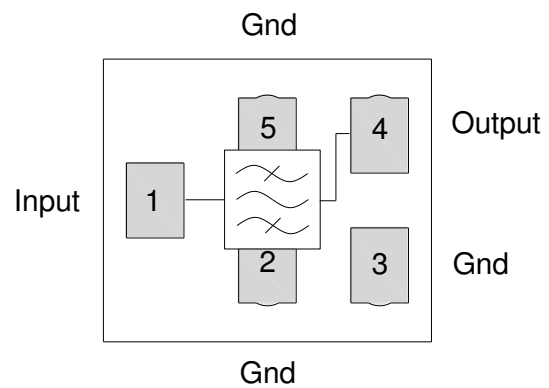

### Pin Configuration

Pin #	Balanced	Description
1		Input
4		Output
3,		Ground
2,5		Case Ground

### Ordering Information

Part No.	Description
857038	packaged part
857038-EVB	evaluation board

Standard T/R size = 10000 units/reel.

## Specifications

### Electrical Specifications <sup>(1)</sup>

Specified Temperature Range: <sup>(2)</sup> -40 to +85 °C

Parameter <sup>(3)</sup>	Conditions	Min	Typical <sup>(4)</sup>	Max	Units
Center Frequency		-	836.5	-	MHz
Maximum Insertion Loss	824 – 849 MHz	-	2.3	3.0	dB
Amplitude Variation	824 – 849 MHz	-	1.0	2.0	dB p-p
Absolute Attenuation <sup>(5)</sup>	10 – 800 MHz	30	45	-	dB
	869 – 894 MHz	40	50	-	dB
	1574.42 – 1576 MHz	28	39	-	dB
	1638 – 1708 MHz	27	38	-	dB
	1930 – 1990 MHz	25	35	-	dB
	2110 – 2170 MHz	24	34	-	dB
	2462 – 2557 MHz	20	33	-	dB
	3286 – 3406 MHz	10	30	-	dB
Input Return Loss	824 – 849 MHz	8.5	10	-	dB
Output Return Loss	824 – 849 MHz	8.5	10	-	dB
Source Impedance (Single-ended) <sup>(6)</sup>		-	50	-	Ω
Load Impedance (Single-ended) <sup>(6)</sup>		-	50	-	Ω

Notes:

- All specifications are based on the TriQuint schematic for the main reference design shown on page 3
- In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature
- Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
- Typical values are based on average measurements at room temperature
- Relative to zero dB.
- This is the optimum impedance in order to achieve the performance shown

### Absolute Maximum Ratings


Parameter	Rating
Operating Temperature <sup>(7)</sup>	-40 to +85 °C
Storage Temperature	-40 to +85 °C

- Device may operate over this range with degraded Electrical Specifications

Operation of this device outside the parameter ranges given above may cause permanent damage.

### Reference Design


#### Schematic

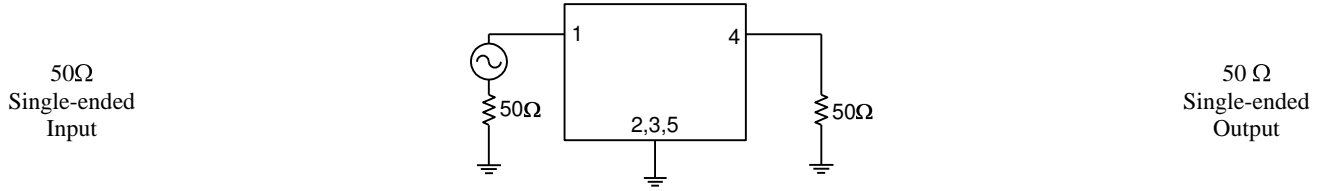

Notes:

- Actual matching values may vary due to PCB layout and parasitic


#### PC Board

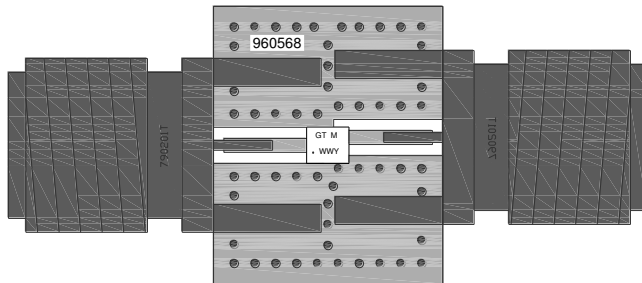

Notes:

- Top, middle & bottom layers: 1 oz copper
- Substrates: FR4 dielectric, .031" thick
- Finish plating: Nickel: 3-8µm thick, Gold: .03-.2µm thick
- Hole plating: Copper min .0008µm thick

#### Mounting Configuration

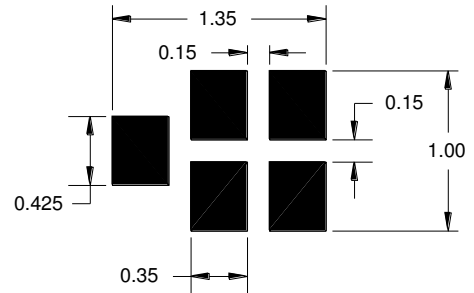







Notes:

- All dimensions are in millimeters.
- This footprint represents a recommendation only.

#### Bill of Material


Reference Desg.	Value	Description	Manufacturer	Part Number
SMA	N/A	SMA connector	Radiall USA Inc.	9602-1111-018
PCB	N/A	3-layer	multiple	960568

### Typical Performance (at room temperature)

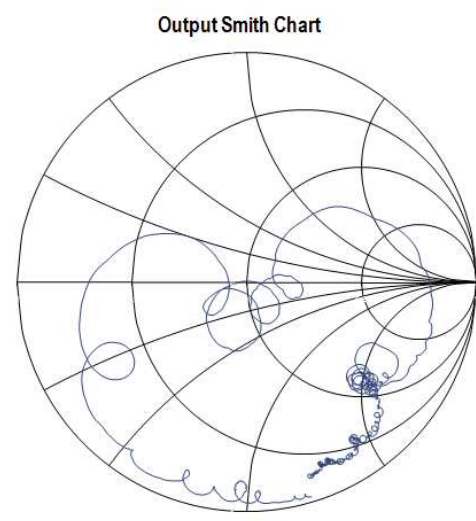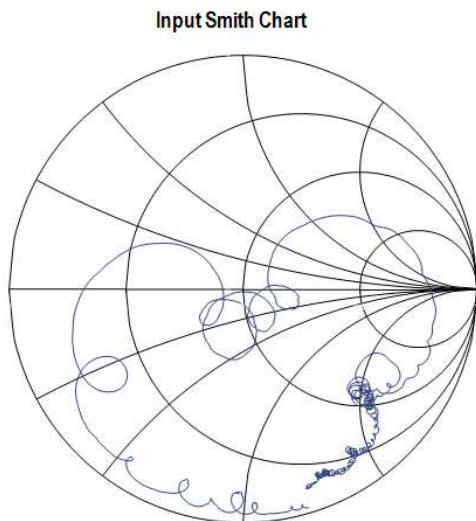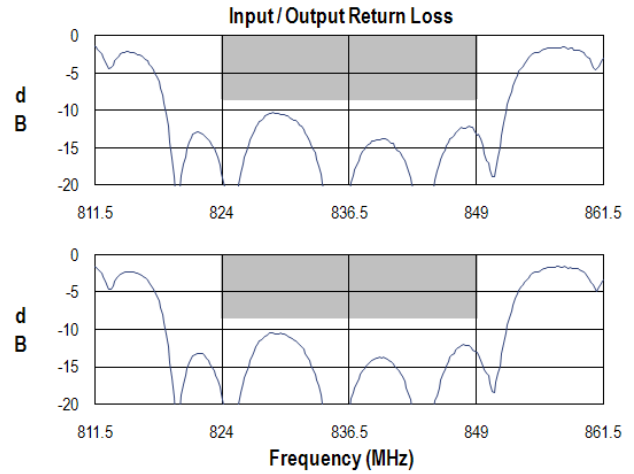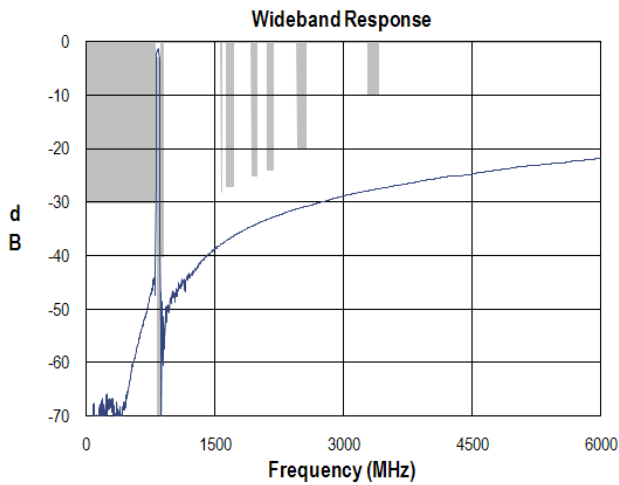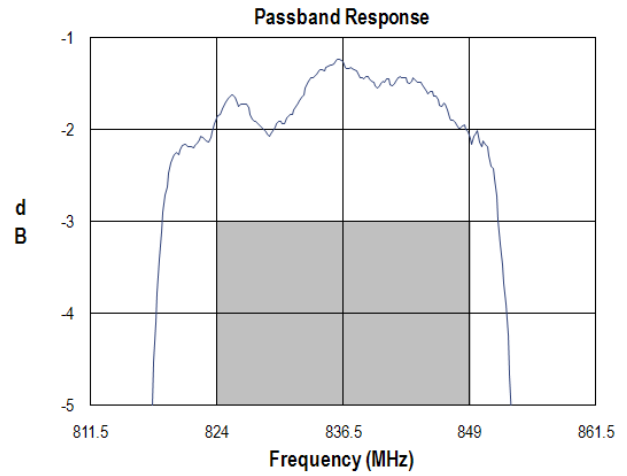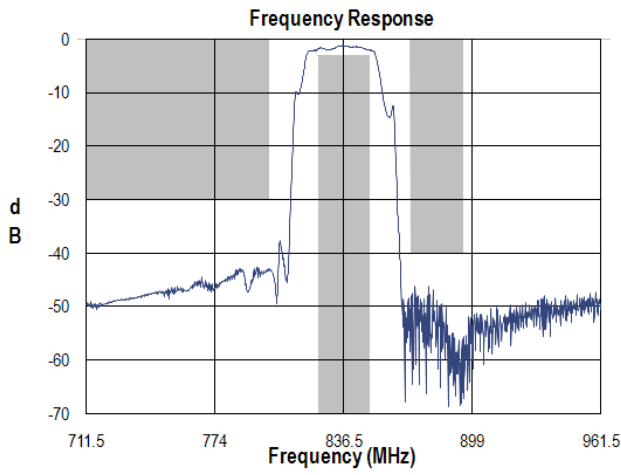

### Mechanical Information

#### Package Information, Dimensions and Marking

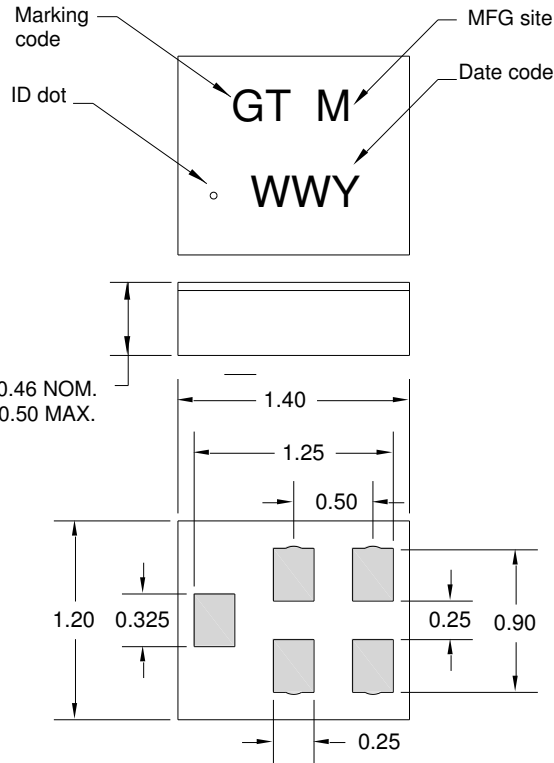

Package Style: CSP-5AT  
 Dimensions: 1.40 x 1.20 x 0.46 mm

Body: Al<sub>2</sub>O<sub>3</sub> ceramic  
 Lid: Kovar or Alloy 42, Au over Ni plated



Terminations: Au plating 0.5 - 1.0µm, over a 2-6µm Ni plating

All dimensions shown are nominal in millimeters  
 All tolerances are ±0.15mm except overall length and width ±0.10mm

The date code consists of: M = manufacturing site code  
 WW = 2 digit week and Y = last digit of year

### Tape and Reel Information

Standard T/R size = 10000 units/reel. All dimensions are in millimeters

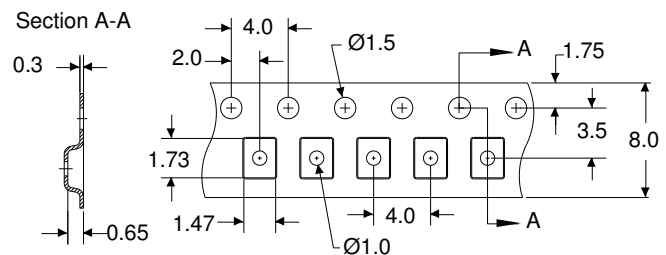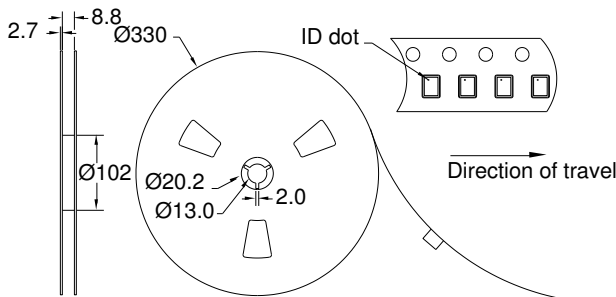

# 857038

## 836.5 MHz SAW Filter

### Product Compliance Information

#### ESD Information



**Caution! ESD-Sensitive Device**

ESD Rating: TBD

Value: Passes  $\geq$  TBD V min.  
Test: Human Body Model (HBM)  
Standard: JEDEC Standard JESD22-A114

ESD Rating: TBD

Value: Passes  $\geq$  TBD V min.  
Test: Machine Model (MM)  
Standard: JEDEC Standard JESD22-A115

#### MSL Rating

Devices are Hermetic, therefore MSL is not applicable

#### Solderability

Compatible with the latest version of J-STD-020, lead free solder, 260°C

Refer to [Soldering Profile](#) for recommended guidelines.

This part is compliant with EU 2002/95/EC RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment).

This product also has the following attributes:

- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A (C<sub>15</sub>H<sub>12</sub>Br<sub>4</sub>O<sub>2</sub>) Free
- PFOS Free
- SVHC Free

### Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations, and information about TriQuint:

Web: [www.triquint.com](http://www.triquint.com)      Tel: +1.407.886.8860  
Email: [info-sales@tqs.com](mailto:info-sales@tqs.com)      Fax: +1.407.886.7061

For technical questions and application information:

Email: [flapplication.engineering@tqs.com](mailto:flapplication.engineering@tqs.com)

### Important Notice

The information contained herein is believed to be reliable. TriQuint makes no warranties regarding the information contained herein. TriQuint assumes no responsibility or liability whatsoever for any of the information contained herein. TriQuint assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for TriQuint products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

TriQuint products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.