


# 857073

## 397.5 MHz SAW Filter

### Applications

- General purpose wireless
- Wireless infrastructure
- 3G, 4G, Multistandard
- Distributed Antenna Systems (DAS)

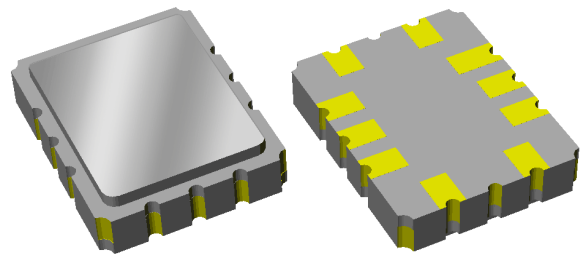

### Product Features

- Usable bandwidth 66.7 MHz
- High attenuation
- Low EVM
- Balanced operation
- Ceramic Surface Mount Package (SMP-28C)
- Small Size: 7.00 x 5.50 x 1.24 mm
- Hermetic **RoHS** compliant, **Pb-free**

### General Description


The 857073 is a high-performance IF SAW filter with a center frequency of 397.5MHz and 1.5 dB bandwidth of 66.7 MHz

It features excellent attenuation and pass band ripple, leading to outstanding EVM performance. 857073 is designed to be used in a balanced configuration, thereby eliminating the need for Baluns on the input and output. The high performance coupled with the small size of this surface mount filter makes it a natural choice for our customers filtering needs in demanding high data rate communications standards.

This device is RoHS compliant and Pb-free.

### Functional Block Diagram

Top view



### Pin Configuration

Pin #	Bal/Bal	Description
10		Input +
9		Input -
5		Output +
4		Output -
1,2,3		Case Ground
6,7,8		Case Ground

### Ordering Information

Part No.	Description
857073	packaged part
857073-EVB	evaluation board

Standard T/R size = 3000 units/reel.

## Specifications

### Electrical Specifications <sup>(1, 2)</sup>

 Specified Temperature Range: <sup>(3)</sup> +10 to +75 °C

Parameter <sup>(4)</sup>	Conditions	Min	Typical <sup>(5)</sup>	Max	Units
Center Frequency	$f_0$	-	398.1	-	MHz
Insertion Loss	at 397.5 MHz	-	16.6	19	dB
1.5 dB Bandwidth <sup>(10)</sup>		65	67.8	-	MHz
2.8 dB Band edge <sup>(9)</sup>		-	363.9	365	MHz
2.8 dB Band edge <sup>(9)</sup>		430	432.5	-	MHz
35 dB Bandwidth <sup>(10)</sup>		-	71.7	76	MHz
Passband Flatness <sup>(7)</sup>	365 – 430 MHz	-	0.7	2.8	dB p-p
Absolute Delay	over $f_0$ +/- 32.5 MHz	-	0.66	0.70	$\mu$ s
Group Delay Ripple <sup>(6)</sup>	over $f_0$ +/- 32.5 MHz	-	36	100	ns p-p
Group Delay Ripple <sup>(6)</sup>	Any 3.84 MHz channel over $f_0$ +/- 32.5 MHz	-	33	70	ns p-p
EVM <sup>(8)</sup>	Any 3.84 MHz channel over $f_0$ +/- 32.5 MHz	-	2.3	3	%
Temperature Coefficient		-	-94	-	ppm/ °C
Input /Output Return Loss	over $f_0$ +/- 32.5 MHz	8.5	14	-	dB
Stopband Attenuation <sup>(10)</sup>	5 – 100 MHz	45	60	-	dB
	150 – 310 MHz	40	58	-	dB
	310 – 359.5 MHz	35	44	-	dB
	359.5 – 360 MHz	28	44	-	dB
	435 – 435.5 MHz <sup>(11)</sup>	25	31	-	dB
	435.5 – 437 MHz	22	41	-	dB
	437 – 460 MHz	35	41	-	dB
	460 – 860 MHz	40	46	-	dB
Source/Load Impedance (balanced) <sup>(12)</sup>		-	100	-	$\Omega$

#### Notes:

- All specifications are based on the TriQuint schematic for the main reference design shown on page 3
- An external impedance matching network with  $\pm 2\%$  tolerance will be necessary to achieve the proposed specifications
- In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature
- Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
- Typical values are based on average measurements of 10 devices at room temperature
- This ripple is defined as the worst peak to adjacent valley within specified frequency range
- Passband Flatness is defined as the difference between maximum and minimum loss over the specified band
- The EVM specification is guaranteed by design and measured approximately in production
- 2.8 db Band edges are relative to Minimum Loss
- All Bandwidth and Attenuation measurements are relative to loss at 1.5dB Center Frequency
- 435 to 435.5 MHz Stopband Attenuation applies only for this temperature range : +25 °C to +75 °C
- This is the optimum impedance in order to achieve the performance shown


### Absolute Maximum Ratings

(Operation of this device outside the parameter ranges given above may cause permanent damage.)

Parameter	Rating
Operable /Storage Temperature	-40 to +85 °C
Input Power	+10dBm (Measured with continuous sine wave signal. Expected Lifetime of greater than or equal to 10K Hrs at 55 °C)

### Reference Design – 100Ω Bal Input, 100Ω Bal Output


#### Schematic

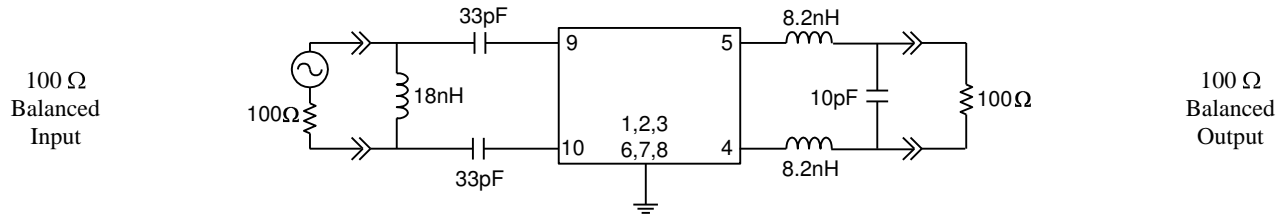

Notes:

1. Actual matching values may vary due to PCB layout and parasitic


#### PC Board

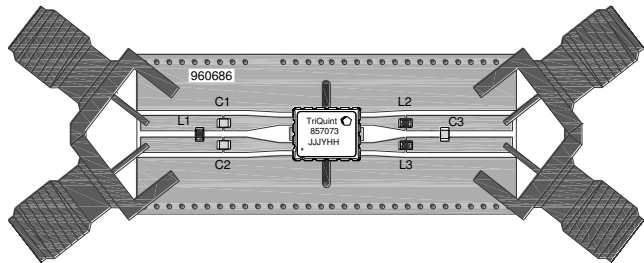

Notes:

- Top, middle & bottom layers: 1 oz copper
- Substrates: FR4 dielectric, .031" thick
- Finish plating: Nickel: 3-8μm thick, Gold: .03-.2μm thick
- Hole plating: Copper min .0008μm thick

#### Mounting Configuration

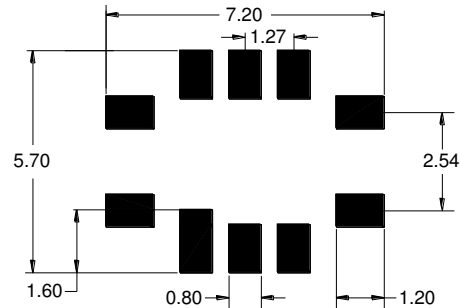







Notes:

1. All dimensions are in millimeters.
2. This footprint represents a recommendation only.

#### Bill of Material

Reference Desg.	Value	Description	Manufacturer	Part Number
L1	18nH	Coil Wire-wound, 0603 5%	MuRata	LQW18AN18NJ00
L2	8.2nH	Coil Wire-wound, 0603, 5%	MuRata	LQW18AN8N2J00
L3	8.2nH	Coil Wire-wound, 0603, 5%	MuRata	LQW18AN8N2J00
C1	33pF	Chip Ceramic, 0603, 5%	MuRata	GRM1885C1H330JA01
C2	33pF	Chip Ceramic, 0603, 5%	MuRata	GRM1885C1H330JA01
C3	10pF	Chip Ceramic, 0603, 5%	MuRata	GRM1885C1H100JA01
SMA	N/A	SMA connector	Johnson Components	142-0701-801
PCB	N/A	3-layer	multiple	960686

### Typical Performance (at room temperature)

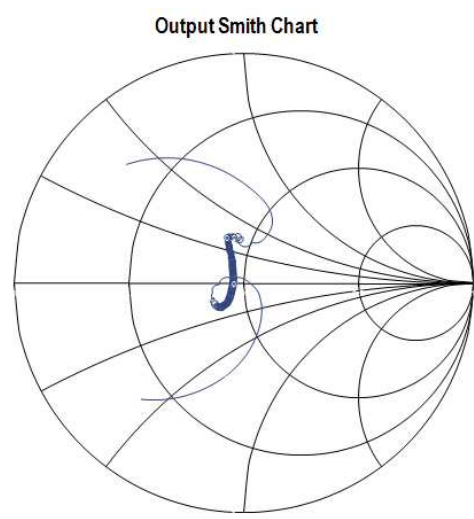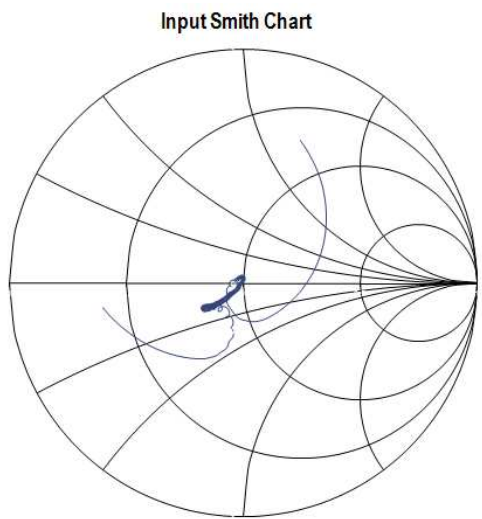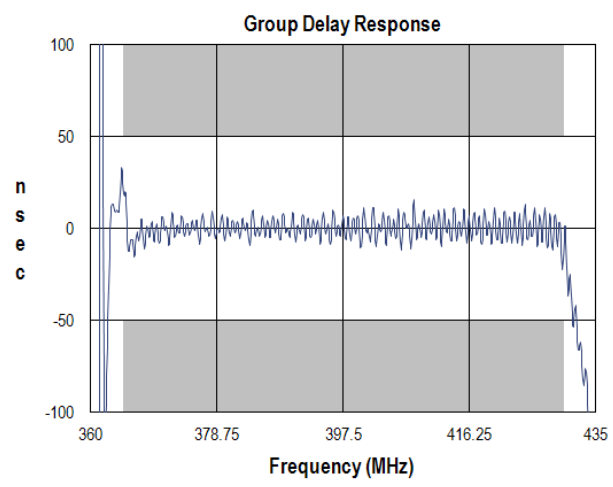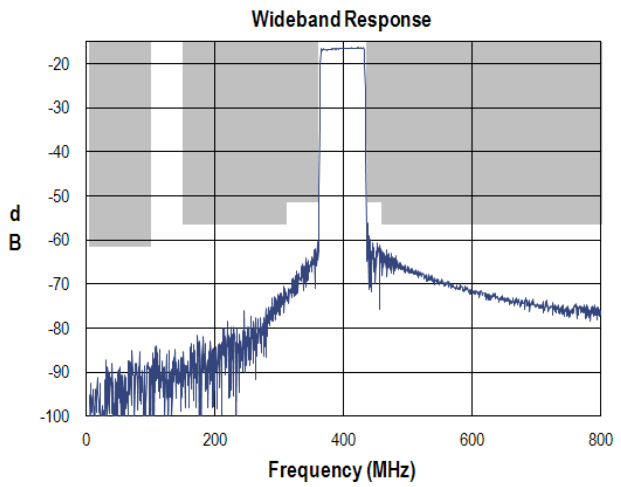
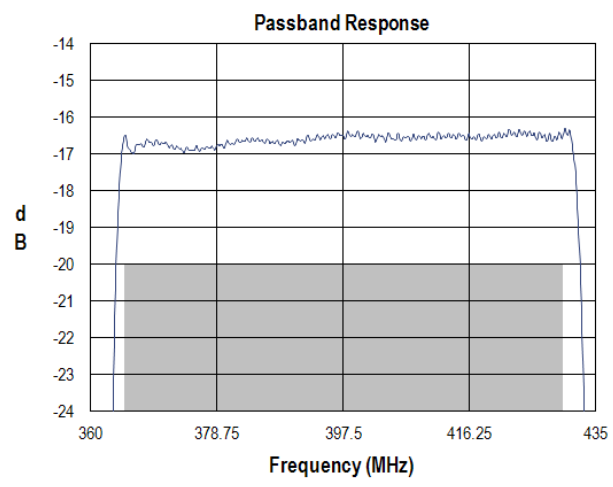
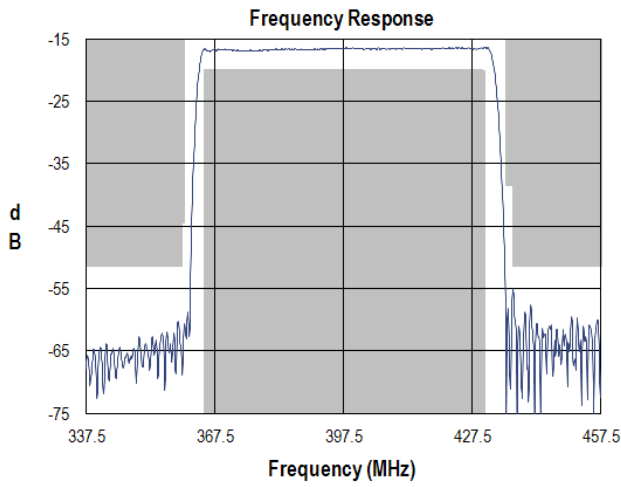


# 857073

## 397.5 MHz SAW Filter

### Mechanical Information

#### Package Information, Dimensions and Marking

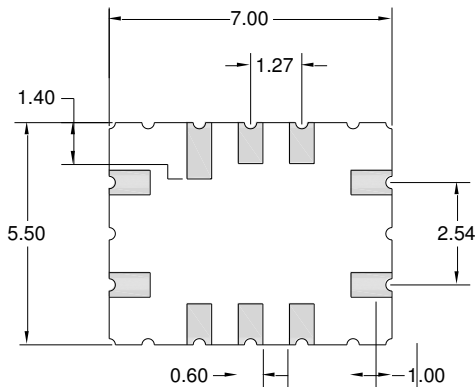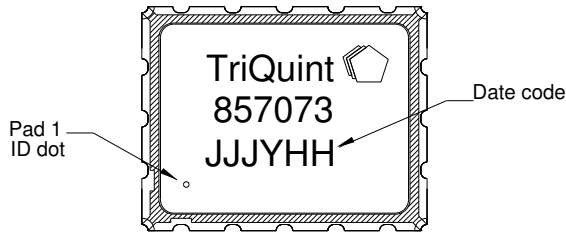

Package Style: SMP-28C  
Dimensions: 7.00 x 5.50 x 1.24 mm



Body: Al<sub>2</sub>O<sub>3</sub> ceramic  
Lid: Kovar, Ni plated  
Terminations: Au plating 0.5 - 1.0µm, over a 2-6µm Ni plating

All dimensions shown are nominal in millimeters  
All tolerances are ±0.15mm except overall length and width ±0.10mm

The date code consists of: day of the current year (Julian, 3 digits), Y = last digit of the year (1 digit), and HH = hour (2 digits)

### Tape and Reel Information

Standard T/R size = 3000 units/reel. All dimensions are in millimeters

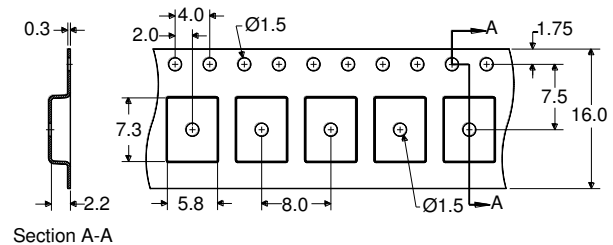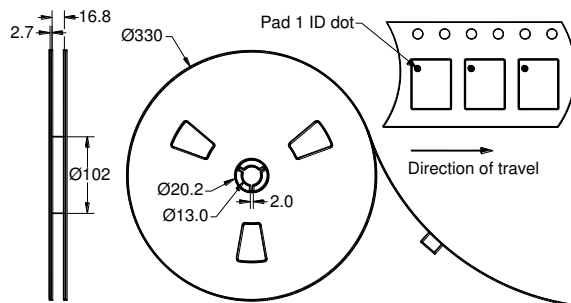

# 857073

## 397.5 MHz SAW Filter

### Product Compliance Information

#### ESD Information



**Caution! ESD-Sensitive Device**

ESD Rating: 0

Value: Passes  $\geq 200$  V min.  
Test: Human Body Model (HBM)  
Standard: JEDEC Standard JESD22-A114

ESD Rating: B

Value: Passes  $\geq 200$  V min.  
Test: Machine Model (MM)  
Standard: JEDEC Standard JESD22-A115

#### MSL Rating

Devices are Hermetic, therefore MSL is not applicable

#### Solderability

Compatible with the latest version of J-STD-020, lead free solder, 260°C

Refer to Soldering Profile for recommended guidelines.

This part is compliant with EU 2002/95/EC RoHS directive (Restrictions on the Use of Certain Hazardous Substances in Electrical and Electronic Equipment).

This product also has the following attributes:

- Halogen Free (Chlorine, Bromine)
- Antimony Free
- TBBP-A (C<sub>15</sub>H<sub>12</sub>Br<sub>4</sub>O<sub>2</sub>) Free
- PFOS Free
- SVHC Free

### Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations, and information about TriQuint:

**Web:** [www.triquint.com](http://www.triquint.com)      **Tel:** +1.407.886.8860  
**Email:** [info-sales@tqs.com](mailto:info-sales@tqs.com)      **Fax:** +1.407.886.7061

For technical questions and application information:

**Email:** [flapplication.engineering@tqs.com](mailto:flapplication.engineering@tqs.com)

### Important Notice

The information contained herein is believed to be reliable. TriQuint makes no warranties regarding the information contained herein. TriQuint assumes no responsibility or liability whatsoever for any of the information contained herein. TriQuint assumes no responsibility or liability whatsoever for the use of the information contained herein. The information contained herein is provided "AS IS, WHERE IS" and with all faults, and the entire risk associated with such information is entirely with the user. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for TriQuint products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

TriQuint products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.