



**Magnetic inductive linear position sensor  
for pneumatic cylinders  
WIM70-Q20L100-LIU5-H1141**

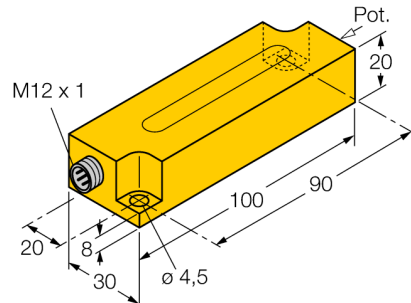

- Plastic, PBT-GF30-V0
- Hardly affected by external magnetic fields
- Analog output (current and voltage)
- The measuring range changes depending on the magnetic field
- Potentiometer to adjust the characteristic slope
- 4-wire, 15...30 VDC
- Analog output
- 0...10 V and 4...20 mA
- Male connector, M12 x 1


**Wiring diagram**



**Functional principle**

Magnetic inductive linear position sensors with analog output accomplish control tasks by providing a signal proportional to the location of the positioning element. They feature excellent reproducibility, resolution and linearity.


Due to their extremely robust design, they are especially suited for industrial applications. They also excel in their high electromagnetic compatibility and stability over a wide temperature range.

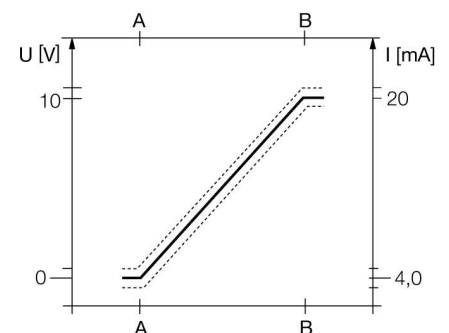

<b>Type code</b>	WIM70-Q20L100-LIU5-H1141
Ident no.	1539276
<b>Measuring range [A...B]</b>	15...85mm
Mounting condition	non-flush
Blind zone connector end L3	15 mm
Blind zone non-connector end L4	15 mm
Repeatability	≤ 0.5 % of measuring range  A - B
Linearity deviation	≤ depending on positioning element
Temperature drift	≤ 8 % of full scale
Ambient temperature	≤ ± 0.06 % / K
	-25...+70 °C
<b>Operating voltage</b>	15...30VDC
Residual ripple	≤ 10 % U <sub>s</sub>
No-load current I <sub>0</sub>	≤ 23 mA
Rated insulation voltage	≤ 0.5 kV
Short-circuit protection	yes
Wire breakage / Reverse polarity protection	yes/ complete
Output function	4-wire, Analog output
Voltage output	0...10V
Current output	4...20mA
Load resistance voltage output	≥ 4.7 kΩ
Load resistance current output	≤ 0.4 kΩ
Measuring sequence frequency	1000 Hz
<b>Design</b>	rectangular, Q20L
Dimensions	100x 30x 20 mm
Housing material	Plastic, PBT
Connection	male, M12 x 1
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 g (11 ms)
Protection class	IP67

**Magnetic inductive linear position sensor  
for pneumatic cylinders  
WIM70-Q20L100-LIU5-H1141**



Mounting instructions / Description	mounting instructions
Width of the active face B	30 mm

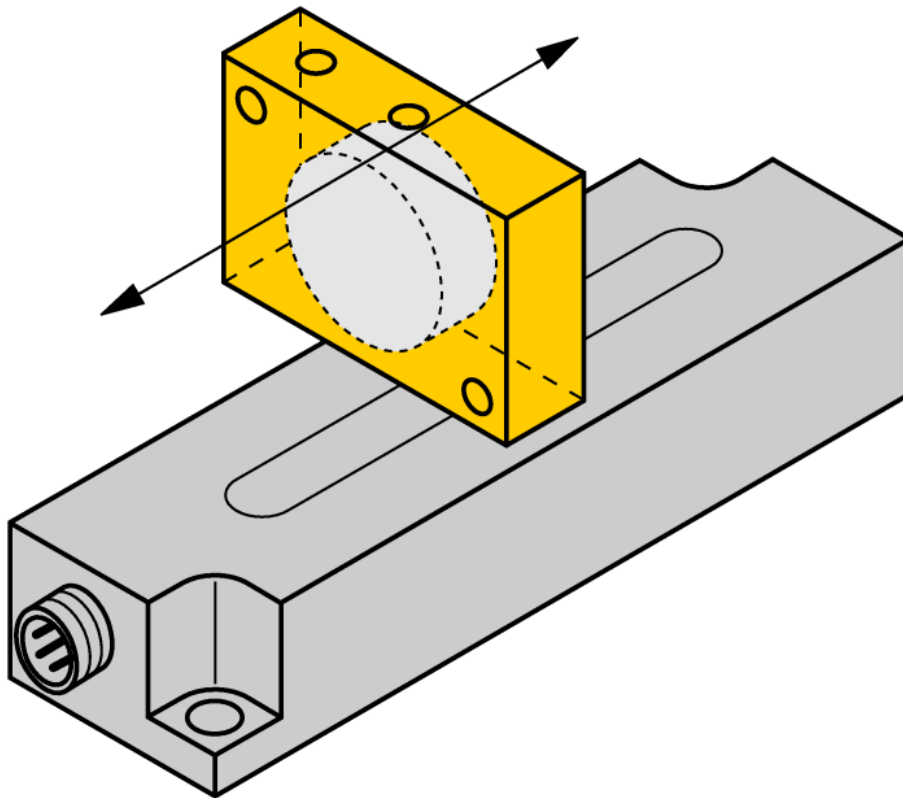

In order to guarantee proper operation of the sensor, it is important that the sensor and the magnet are correctly mounted. The magnet has to be aligned in a certain angle to the sensor (see photo). The connector end of the sensor and the south pole of the magnet must point in the same direction. Between the surface of the sensor and the bottom edge of the magnet a defined maximum distance should not be exceeded. This distance depends on the size and strength of the magnet. If a DM-Q12 or DMR20-10-4 is applied the maximum distance is 5mm. Neighbouring magnets may have an influence on the output signal of the sensor. The switching distance of the sensor can be adjusted via the potentiometer at the front, one clockwise turn increases the current i.e. voltage output.

**Magnetic inductive linear position sensor  
for pneumatic cylinders  
WIM70-Q20L100-LIU5-H1141**

**Accessories**

Type code	Ident no.	Description	Dimension drawing
DM-Q12	6900367	Actuation magnet; cuboid-shaped plastic; sensing range 58 mm on BIM-(E)M12 sensors resp. 49 mm on BIM-EG08 sensors; in combination with Q25: Recommended distance between sensor and magnet: 3 ... 5 mm	
DMR20-10-4	6900214	Actuation magnet; Ø 20 mm (Ø 4 mm), h: 10 mm; sensing range 59 mm on BIM-(E)M12 sensors resp. 50 mm on BIM-EG08 sensors; in combination with Q25L: Recommended distance between sensor and magnet: 3 ... 4 mm	
IM43-13-SR	7540041	Limit value monitor; 1-channel; input 0/4...20 mA or 0/2...10 V; supply of 2- or 3-wire transmitters/sensors; limit value adjustment via teach button; three relay outputs with one NO contact each; removable terminal blocks; 27 mm wide; universal voltage supply 20...250 VUC; further limit value monitors are described in our "Interface Technology" catalog.	