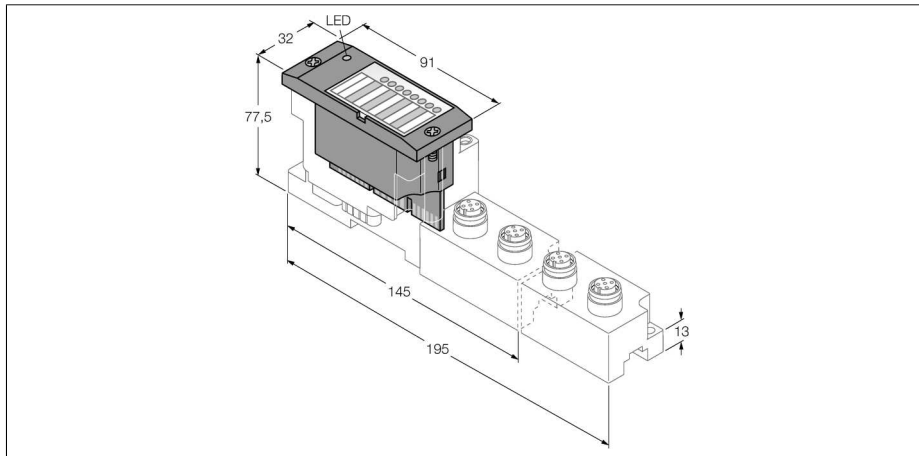


**BL67 electronic modules**  
**2 analog inputs for current/voltage and 2 analog outputs for voltage**  
**BL67-2AI2AO-V/I**



- Independent of the type of fieldbus and connection technology used
- Protection class IP67
- LEDs indicate status and diagnostic
- Electronics galvanically separated from the field level via optocouplers
- 2 analog inputs
- 0/4...20mA or
- -10/0...+10 VDC
- Selectable per channel
- 2 analog outputs
- -10/0...+10 VDC

<b>Type code</b>	BL67-2AI2AO-V/I
Ident no.	6827324

<b>Supply voltage</b>	24 VDC
Admissible range	18...30 VDC
Power loss, typical	≤ 1 W
Nominal voltage $V_n$	24 VDC
Max. sensor supply $I_{sens}$	4 A

<b>Analog inputs</b>	
Input type	0/4 ... 20 mA or -10/0 ... 10 VDC
Type of input diagnostics	channel diagnostics
Sensor supply	24 VDC
Input resistance	0.065 or 225 kΩ
Maximum limiting frequency analog	< 20 Hz
Basic fault limit at 23 °C	< 0.3 %
Repeatability	< 0.05 %
Temperature coefficient	< 300 ppm/°C of full scale
Resolution	16 bit
Measuring principle	Sigma Delta
Measured-value displayed	16 bit signed integer 12 bit full range left justified

<b>Analog outputs</b>	
Output type	-10/0 ... 10 V
Type of output diagnostics	Channel diagnostics
Sensor supply	24 VDC, 250 mA per channel
Load resistance, resistive	> 1 kΩ
Load resistance, capacitive	< 1 μF
Transmission frequency	< 100 Hz
Basic fault limit at 23 °C	< 0.3 %
Repeatability	< 0.05 %
Temperature coefficient	< 300 ppm/°C of full scale
Resolution	16 bit
Measured-value display	16 bit signed integer 12 bit full range left justified

**Functional principle**

BL67 electronic modules are plugged on the purely passive base modules which in turn are connected to the field devices. The separation of connection level and electronics simplifies maintenance considerably. Flexibility is enhanced because the user can choose between base modules with different connection technologies.

The electronic modules are completely independent of the higher level fieldbus through the use of gateways.

## BL67 electronic modules

### 2 analog inputs for current/voltage and 2 analog outputs for voltage

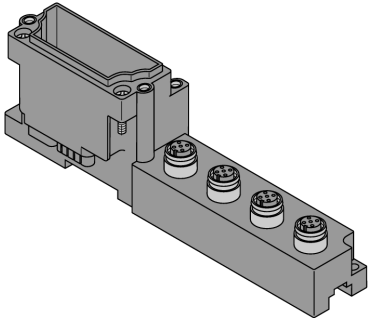

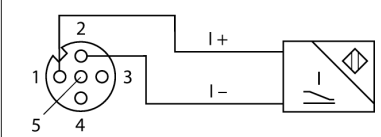
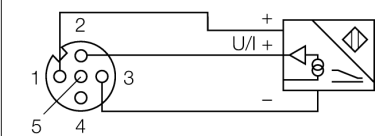
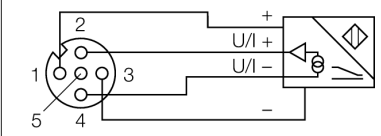

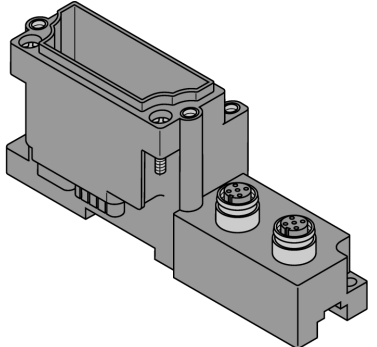


### BL67-2AI2AO-V/I

---

<b>Operating temperature</b>	-40...+70 °C
Storage temperature	-40 ... +85 °C
Relative humidity	5 to 95% (internal), Level RH-2, no condensation (at 45 °C storage)
Vibration test	acc. to EN 61131
Extended vibration resistance	
- up to 5 g (at 10 to 150 Hz)	For mounting on DIN rail no drilling according to EN 60715, with end bracket
- up to 20 g (at 10 to 150 Hz)	For mounting on base plate or machinery Therefore every second module has to be mounted with two screws each.
Shock test	acc. to IEC 68-2-27
Drop and topple	acc. to IEC 68-2-31 and free fall to IEC 68-2-32
Electro-magnetic compatibility	acc. to EN 61131-2
Protection class	IP67

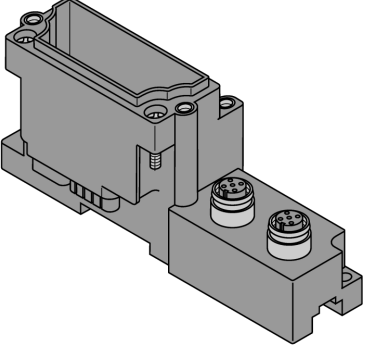
**BL67 electronic modules**  
**2 analog inputs for current/voltage and 2 analog outputs for voltage**  
**BL67-2AI2AO-V/I**

**Compatible base modules**

Dimension drawing	Type	Pin configuration
	<p><b>BL67-B-4M12</b>                      6827187                      4 x M12, 5-pole, female, a-coded</p> <p><b>Comments</b>                      Matching connection cable (for example):                      WAK4.5-2-WAS4.5/S57                      Ident no. 8016988</p>	<p><b>Pin assignment, slots 0 to 1</b></p>  <p>1 = V<sub>SENS</sub>                  2 = AI +                  3 = GND                  4 = AI -                  5 = PE</p> <p><b>2-wire technology</b></p>  <p><b>3-wire connection technology</b></p>  <p><b>4-wire connection technology</b></p>  <p><b>Pin assignment, slots 2 to 3</b></p>  <p>1 = V<sub>SENS</sub>                  2 = AO +                  3 = GND                  4 = AO -                  5 = PE</p>
	<p><b>BL67-B-2M12-8</b>                      6827336                      2 x M12, 8-pole, female</p> <p><b>Comments</b>                      Field-wireable connector (for example):                      BS8181-0                      Ident. no. 6901004</p>	<p><b>Pin assignment slot 0</b></p>  <p>1 = AI 0 - 5 = V<sub>SENS</sub>                  2 = AO 0 - 6 = V<sub>SENS</sub>                  3 = AI 0 + 7 = GND                  4 = AO 0 + 8 = PE</p> <p><b>Pin configuration slot 1</b></p>  <p>1 = AI 1 - 5 = V<sub>SENS</sub>                  2 = AO 1 - 6 = V<sub>SENS</sub>                  3 = AI 1 + 7 = GND                  4 = AO 1 + 8 = PE</p>

**BL67 electronic modules**  
**2 analog inputs for current/voltage and 2 analog outputs for voltage**  
**BL67-2AI2AO-V/I**

**Compatible base modules**

Dimension drawing	Type	Pin configuration																																								
	<p><b>BL67-B-2M12-8-P</b>                      6827337                      2 x M12, 8-pole, female, paired</p>	<p><b>Pin assignment slot 0</b></p> <p style="text-align: center;">↺</p> <table border="0"> <tr> <td>8</td><td>2</td><td>3</td><td>1 = AI 0 -</td><td>5 = V<sub>SENS</sub></td> </tr> <tr> <td>1</td><td>8</td><td>4</td><td>2 = AI 1 -</td><td>6 = V<sub>SENS</sub></td> </tr> <tr> <td>7</td><td>6</td><td>5</td><td>3 = AI 0 +</td><td>7 = GND</td> </tr> <tr> <td></td><td></td><td></td><td>4 = AI 1 +</td><td>8 = PE</td> </tr> </table> <p><b>Pin configuration slot 1</b></p> <p style="text-align: center;">↺</p> <table border="0"> <tr> <td>8</td><td>2</td><td>3</td><td>1 = AO 0 -</td><td>5 = V<sub>SENS</sub></td> </tr> <tr> <td>1</td><td>8</td><td>4</td><td>2 = AO 1 -</td><td>6 = V<sub>SENS</sub></td> </tr> <tr> <td>7</td><td>6</td><td>5</td><td>3 = AO 0 +</td><td>7 = GND</td> </tr> <tr> <td></td><td></td><td></td><td>4 = AO 1 +</td><td>8 = PE</td> </tr> </table>	8	2	3	1 = AI 0 -	5 = V <sub>SENS</sub>	1	8	4	2 = AI 1 -	6 = V <sub>SENS</sub>	7	6	5	3 = AI 0 +	7 = GND				4 = AI 1 +	8 = PE	8	2	3	1 = AO 0 -	5 = V <sub>SENS</sub>	1	8	4	2 = AO 1 -	6 = V <sub>SENS</sub>	7	6	5	3 = AO 0 +	7 = GND				4 = AO 1 +	8 = PE
8	2	3	1 = AI 0 -	5 = V <sub>SENS</sub>																																						
1	8	4	2 = AI 1 -	6 = V <sub>SENS</sub>																																						
7	6	5	3 = AI 0 +	7 = GND																																						
			4 = AI 1 +	8 = PE																																						
8	2	3	1 = AO 0 -	5 = V <sub>SENS</sub>																																						
1	8	4	2 = AO 1 -	6 = V <sub>SENS</sub>																																						
7	6	5	3 = AO 0 +	7 = GND																																						
			4 = AO 1 +	8 = PE																																						

**BL67 electronic modules**  
**2 analog inputs for current/voltage and 2 analog outputs for voltage**  
**BL67-2AI2AO-V/I**

**LED display**

LED	color	status	description
D		OFF	Error report or diagnostics active.
	RED	ON	Failure of MODBUS communication Check if more than 2 adjacent electronic modules are pulled. Relevant modules are located between gateway and this module.
	RED	FLASHING (0.5 Hz)	Upcoming module diagnostics
AI channels 0...1		OFF	Channel x inactive
	GREEN	ON	Channel x active
	GREEN	FLASHING (0.5 Hz)	Measuring range undershoot
	GREEN	FLASHING (4 Hz)	Measuring range overshoot
AO channels 2...3			Without function (no LEDs for analog outputs)

**BL67 electronic modules**  
**2 analog inputs for current/voltage and 2 analog outputs for voltage**  
**BL67-2AI2AO-V/I**

**Data mapping**

DATA	BYTE	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
<b>Input</b>	n	AI 0 LSB							
	n+1	AI 0 MSB							
	n+2	AI 1 LSB							
	n+3	AI 1 MSB							
<b>Output</b>	m	AO 0 LSB							
	m+1	AO 0 MSB							
	m+2	AO 1 LSB							
	m+3	AO 1 MSB							

n = Offset of input data; depending on extension of station and the corresponding fieldbus.

m = Offset of output data; depending on extension of station and the corresponding fieldbus.

With PROFIBUS, PROFINET and CANopen, the I/O data of this module is localized within the process data of the whole station via the hardware configuration tool of the fieldbus master.

With DeviceNet™, EtherNet/IP™ and Modbus TCP a detailed mapping table can be created with the TURCK configuration tool I/O-ASSISTANT.