







RF DIFFERENTIAL SPLITTER

For RF Applications in Coaxial Cable Products and Distribution Equipment



-  Differential inputs and differential outputs
-  Optimized for use with differential amplifiers
-  Operating bandwidth: 96MHz to 864MHz
-  Ideal for set top box applications
-  Good flatness
-  Good Isolation




Electrical Specifications @ 25°C

Standard ¹ Part Number	RoHS-6 ¹ Compliant Part No.	Frequency ² (MHz)	Z (Ω)	Insertion Loss (Above 3dB)		Flatness 96-864MHz (dB TYP/MAX)	Isolation 96-864MHz (dB TYP/MIN)	Return Loss 96-864MHz (dB MIN)
				96-400MHz (dB TYP/MAX)	400-864MHz (dB TYP/MAX)			
C4020	C4020NL	96-864	75	1.1/1.8	1.9/3.0	1.0/1.5	25/20	9

Notes: 1. Optional Tape & Reel packaging available by adding a "T" suffix to the part number (ex: C4020T). Specifications apply to both Port 1 and Port 2.
 2. Additional operating frequencies are available. Please contact Pulse Applications Engineering for further details.


Mechanical

C4020/C4020NL

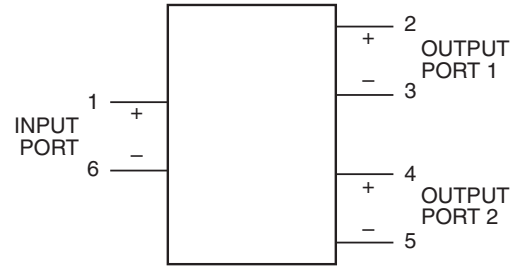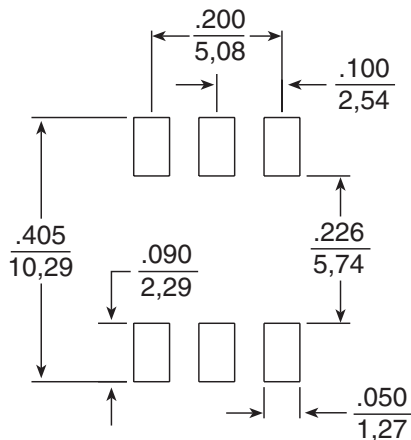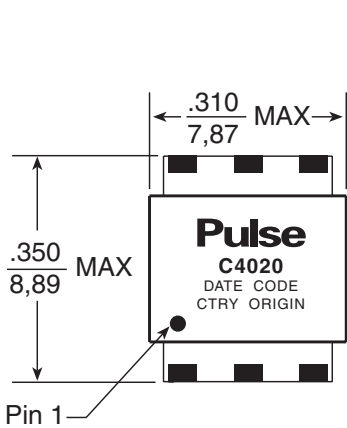

BLOCK DIAGRAM

SUGGESTED PAD LAYOUT

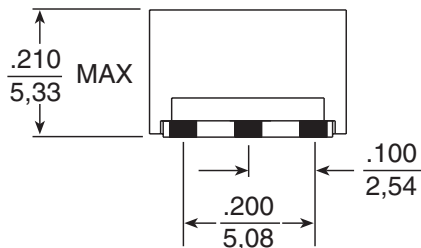

Weight0.40 grams

Tape & Reel850/reel

Dimensions: $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified, all tolerances are $\pm \frac{.005}{0,13}$

RF DIFFERENTIAL SPLITTER

For RF Applications in Coaxial Cable Products and Distribution Equipment




Application Notes


A. Materials used in the products are UL94-V0 recognized. Products meet requirements of IEC 695-2-2 (Needle Flame Test).

Tape and Reel Specifications


C4020/C4020NL

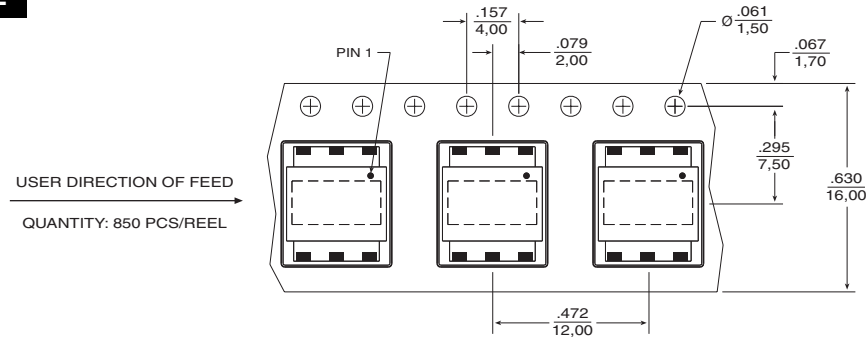

C4020 / C4020NL - Port 1 Insertion Loss

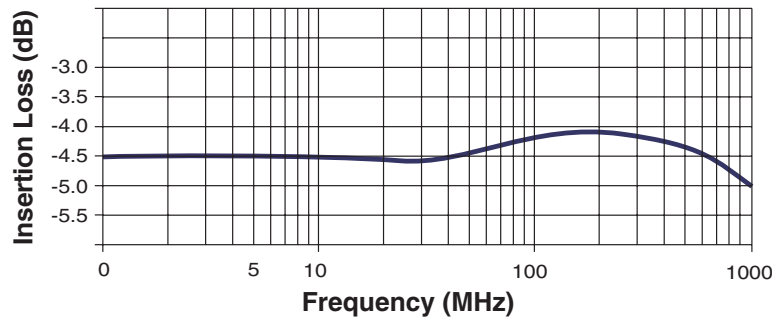

C4020 / C4020NL - Port 2 Insertion Loss

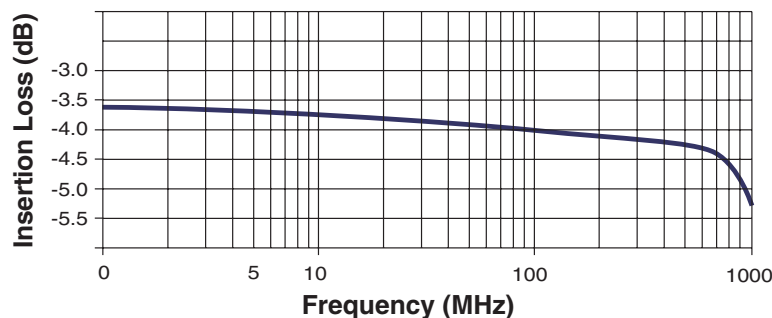

For More Information:

Pulse Worldwide Headquarters
 12220 World Trade Drive
 San Diego, CA 92128
 U.S.A.
www.pulseeng.com
 TEL: 858 674 8100
 FAX: 858 674 8262

Pulse Northern Europe
 3 Huxley Road
 Surrey Research Park
 Guildford, Surrey GU2 5RE
 United Kingdom
 TEL: 44 1483 401700
 FAX: 44 1483 401701

Pulse Southern Europe
 Zone Industrielle
 F-39270
 Orgelet
 France
 TEL: 33 3 84 35 04 04
 FAX: 33 3 84 25 46 41

Pulse China Headquarters
 No. 1
 Industrial District
 Changan, Dongguan
 China
 TEL: 86 769 5538070
 FAX: 86 769 5538870

Pulse North China
 Room 1503
 XinYin Building
 No. 888 YiShan Road
 Shanghai 200233
 China
 TEL: 86 21 54643211/2
 FAX: 86 21 54643210

Pulse South Asia
 150 Kampong Ampat
 #07-01/02
 KA Centre
 Singapore 368324
 TEL: 65 6287 8998
 FAX: 65 6280 0080

Pulse North Asia
 No. 26
 Kao Ching Road
 Yang Mei Chen
 Taoyuan Hsien
 Taiwan, R. O. C.
 TEL: 886 3 4641811
 FAX: 886 3 4641911

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.

© Copyright, 2006. Pulse Engineering, Inc. All rights reserved.

www.pulseeng.com

C222.B (2/06)