

MABA-007237-ETC410




E-Series RF 1:4 Coupled Step-Up Transformer
1MHz - 350 MHz

Rev. V1

Features

- Surface mount
- Wide frequency range
- 1:4 Impedance Ratio
- CT on Secondary
- Lead Free
- RoHS* Compliant and is 260°C reflow compatible.
- Available on Tape and Reel, reel quantity 2000

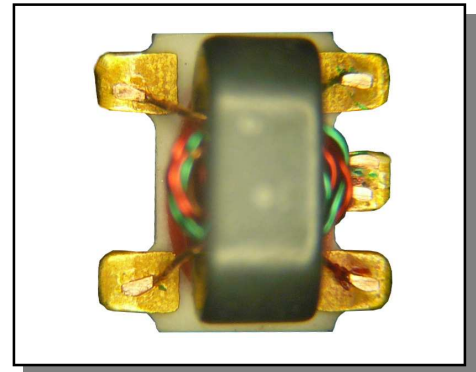


Electrical Specifications: $Z_0 = 50\Omega$, $T_A = 25^\circ\text{C}$, $P_{in} = 0\text{dBm}$

Parameter	Test Conditions	Frequency	Units	Min	Typ	Max
RF Frequency	—	1 - 350	MHz	—	—	—
Insertion Loss	$F_L - f_U$	5 - 100	dB	—	—	1.0
		2 - 300	dB	—	1.21	2.0
		1 - 350	dB	—	—	3.0
Amplitude Unbalance	—	5 - 100	dB	—	—	0.1
		1 - 350	dB	—	—	0.5
Phase Unbalance	—	5 - 100	Degrees	—	—	1.0
		1 - 350	Degrees	—	—	5.0

Pin Configuration

Pin No.	Function
1	Secondary
2	Secondary CT
3	Secondary Dot
4	Primary Dot
5	Primary

Schematic

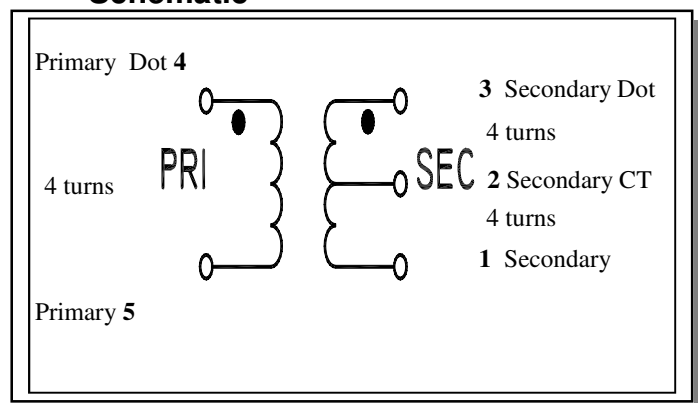


MABA-007237-ETC410




E-Series RF 1:4 Coupled Step-Up Transformer
1MHz - 350 MHz

Rev. V1


Insertion Loss

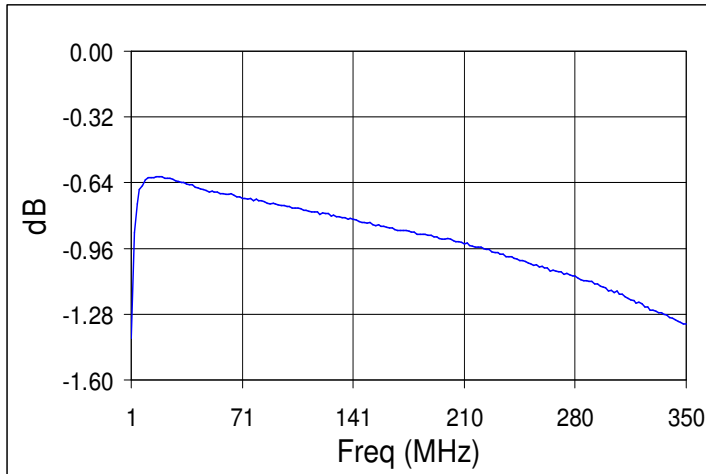

Isolation: Pin 3 to 6

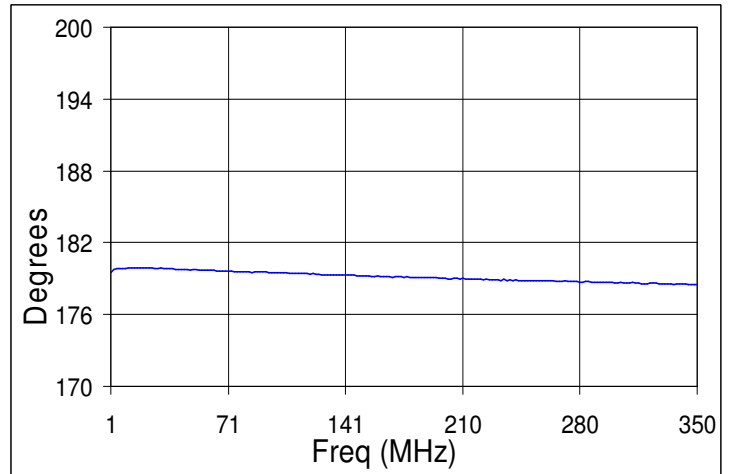

Return Loss: Output Pin 4

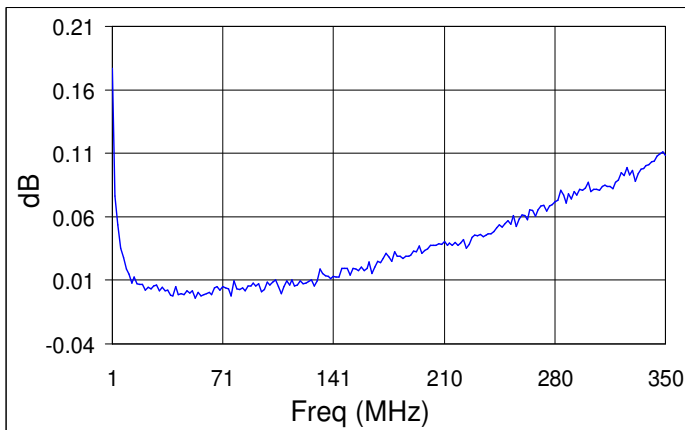

Electrical Specifications: $Z_0 = 75\Omega$, $T_A = 25^\circ\text{C}$, $P_{in} = 0\text{dBm}$


MABA-007237-ETC410



E-Series RF 1:4 Coupled Step-Up Transformer
1MHz - 350 MHz


Rev. V1

Outline Drawing

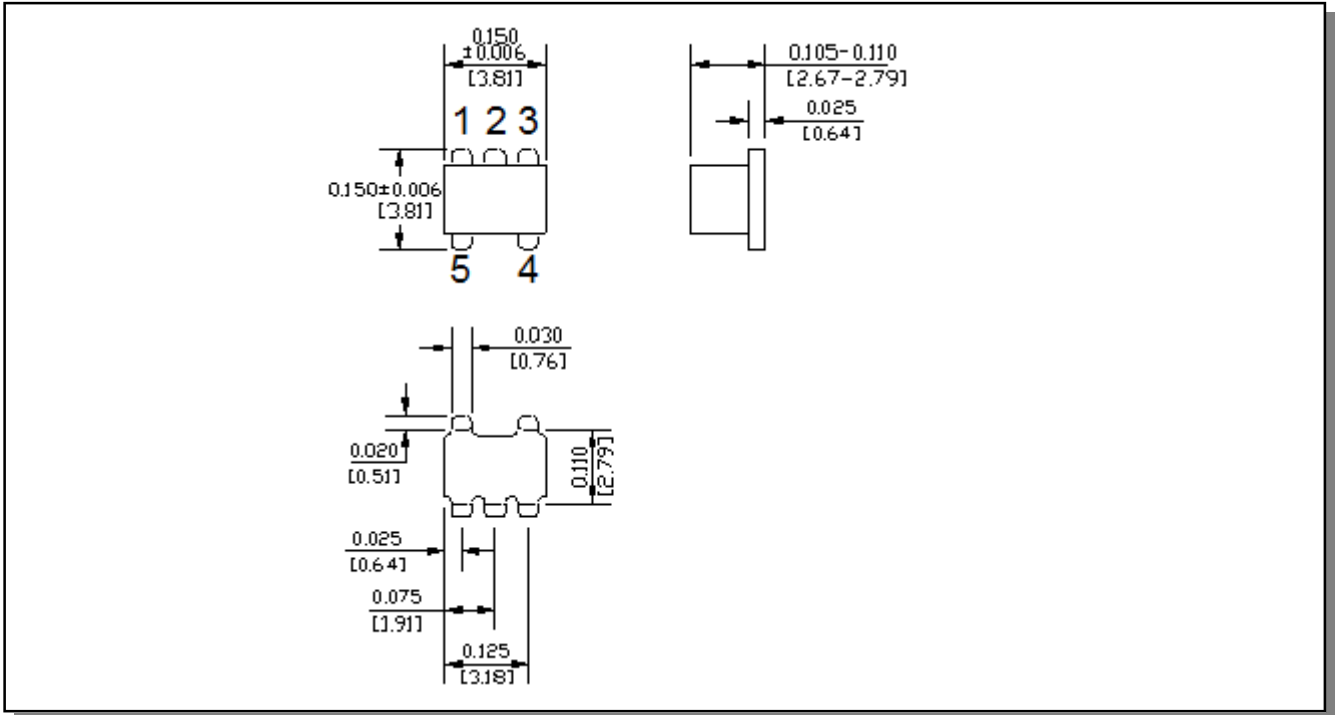

1. Dimensions in mm.
2. Tolerance: ± 0.2 mm unless otherwise noted.
3. Model number and lot code printed on reel.

Recommended Footprint

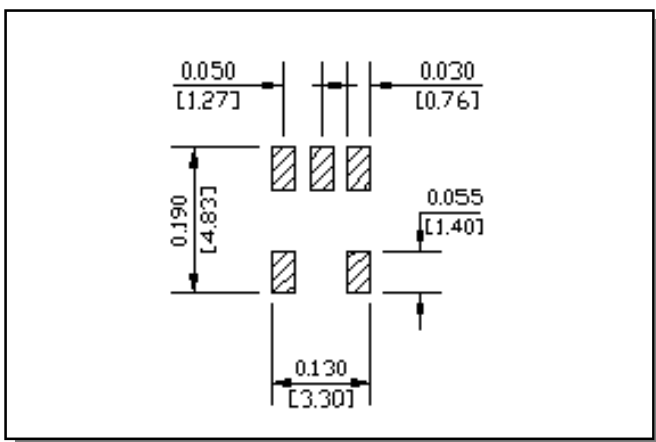

MABA-007237-ETC410



E-Series RF 1:4 Coupled Step-Up Transformer
1MHz - 350 MHz

Rev. V1

Tape & Reel Information

Parameter	Units	Value
Qty per reel	-	2000
Reel size	mm	330
Tape width (W)	mm	12.0
Pitch (P_1)	mm	12.0
A_0	mm	4.0
B_0	mm	4.0
K_0	mm	2.9
Orientation	-	F5
Reference Application Note ANI-019 for orientation		

Ordering Information

Part Number	Description
MABA-007237-ETC410	2000 piece reel

Recommended Maximum Ratings

Parameter	Absolute Maximum
DC Power	250 mW
DC Current	30 mA
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +125°C

1. Exceeding any one or combination of these limits may cause permanent damage to this device.
2. M/A-COM does not recommend sustained operation near these survivability limits.