

# "High Frequency Ceramic Solutions"

## 915 MHz Low Pass Filter

P/N 0915LP15A026

Detail Specification: 01/23/2003


Page 1 of 2

Part Number	Frequency (MHz)	Insertion Loss	Attenuation (min.)	Return Loss
0915LP15A026_	902 - 928	0.65 dB max.	25 dB @ $2 \times f_0$ 25 dB @ $3 \times f_0$	9.5 dB min.

Input Power	Impedance	Operating Temperature Range
3 Watt max	50 $\Omega$	-40 to +85°C


### Mechanical Dimensions

	L	W	T	a	b	c	g	p
Inches	0.079 ± .004	0.049 ± .004	0.034 ± .004	0.012 ± .004	0.008 ± .004	0.012 + .004/-0.008	0.014 ± .004	0.026 ± .002
mm	2.0 ± 0.1	1.25 ± 0.1	0.85 ± 0.1	0.30 ± 0.1	0.20 ± 0.1	0.30+0.1/-0.2	0.35 ± 0.1	0.65 ± 0.05

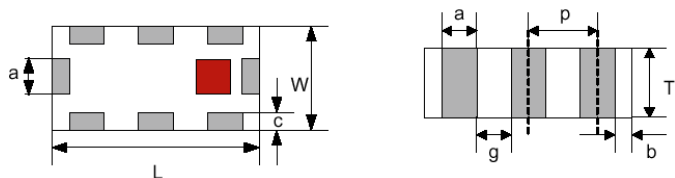


### Terminal Configuration

No.	Function	No.	Function
1	GND	5	GND
2	NC	6	NC
3	GND	7	GND
4	OUT	8	IN



### Mounting Considerations

- Mount these devices with brown mark facing up.
- Line width should be designed to provide 50 $\Omega$  impedance matching

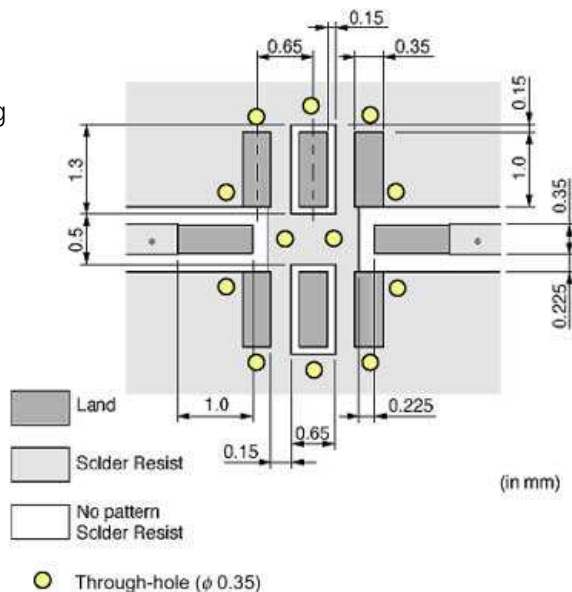

Johanson Technology, Inc. reserves the right to make design changes without notice.  
All sales are subject to Johanson Technology, Inc. terms and conditions.


# “High Frequency Ceramic Solutions”

## 915 MHz Low Pass Filter

Detail Specification: 01/23/2003

P/N 0915LP15A026

Page 2 of 2

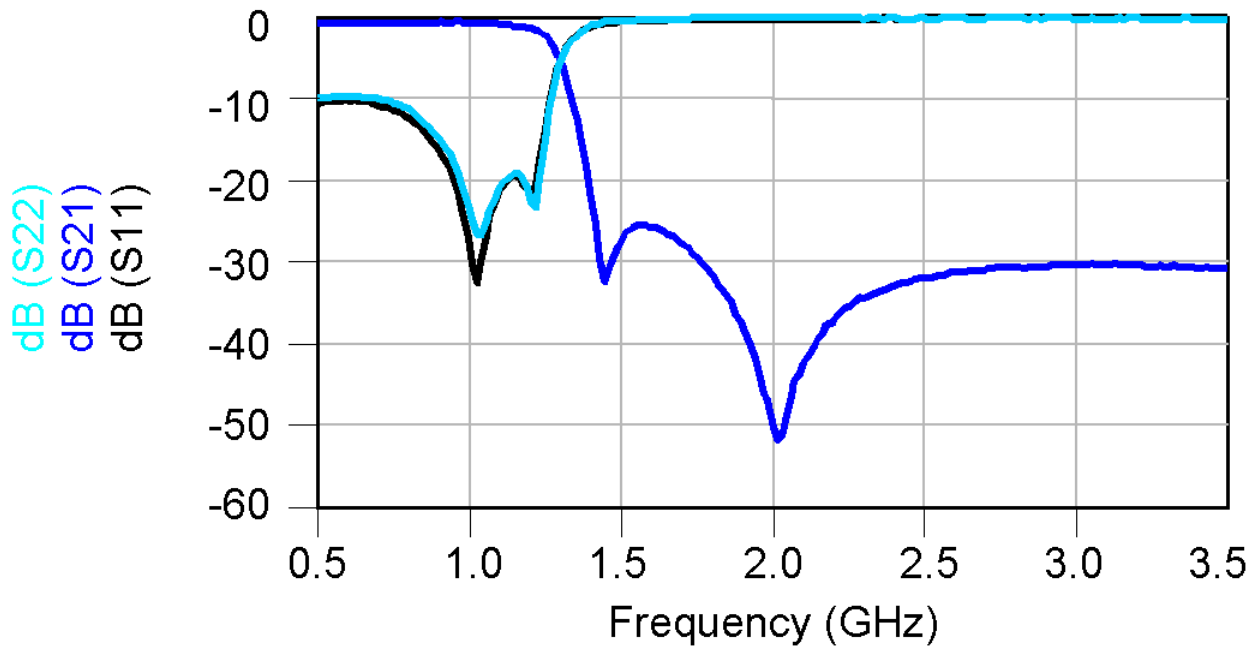

### Delivery

Packaged in embossed tape on 7" reels (4000 / reel)  
Standard delivery is eight weeks or sooner ARO