

Specification

Spec No. : **FXP290**
 Part No. : **FXP290.07.0100A**
 Model : 915MHz ISM Band Flex Circuit Antenna
 Features : 75*45*0.1mm
 100mm Ø1.13 Cable
RoHS ✓



VERSION	DATE	PAGE	DESCRIPTION	CENTRE	APPROVED
A	09/21/2009	All	Antenna Specifications	Taiwan	Ruben F. Cuadras

I. OVERVIEW

The Taoglas FXP290 915 MHz ISM Antenna covers from 902-928 MHz used in the 915 MHz ISM (Industrial Scientific Medical) Band. The antenna has been designed in a flexible material with a square form-factor and cable connection for an easy installation. The antenna works on different plastic materials and thickness. We have selected a piece of ABS with 2 mm of thickness as a baseline for testing.

II. ANTENNA CHARACTERISTICS

Parameter	Specification
Frequency Range	902MHz to 928MHz
Return Loss (dB)	-20
Efficiency (%)	40
Gain (dBi)	1.5
Impedance	50 Ω
VSWR	$\leq 2:1$
Polarization	Linear
Power Handled	5W
Operation Temperature	-40°C ~ +85°C
Storage Temperature	-40°C ~ +85°C
Dimensions	75*45*0.1mm
Weight	1.5g
Connector	MHFII (U.FL Compatible)
Cable Standard	Mini-Coax 1.13 mm
Cable Length and color	100mm, Black
RoHS Compliant	Yes
Adhesive	3M 467

III. TEST SET UP

An ETS-Lindgren 3D Scan System with Anechoic Chamber

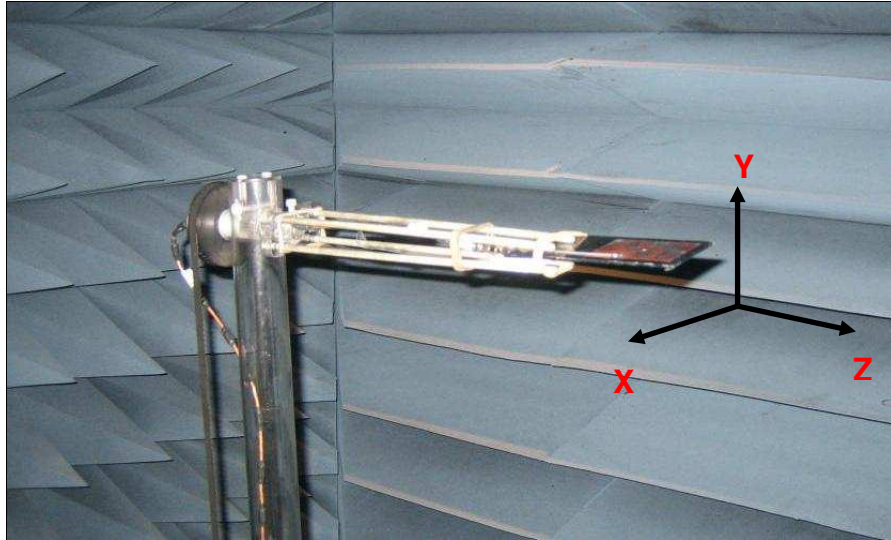


Figure 1. ETS-Lindgren System.

Rhode & Schwartz ZVL6 Vector Network Analyzer

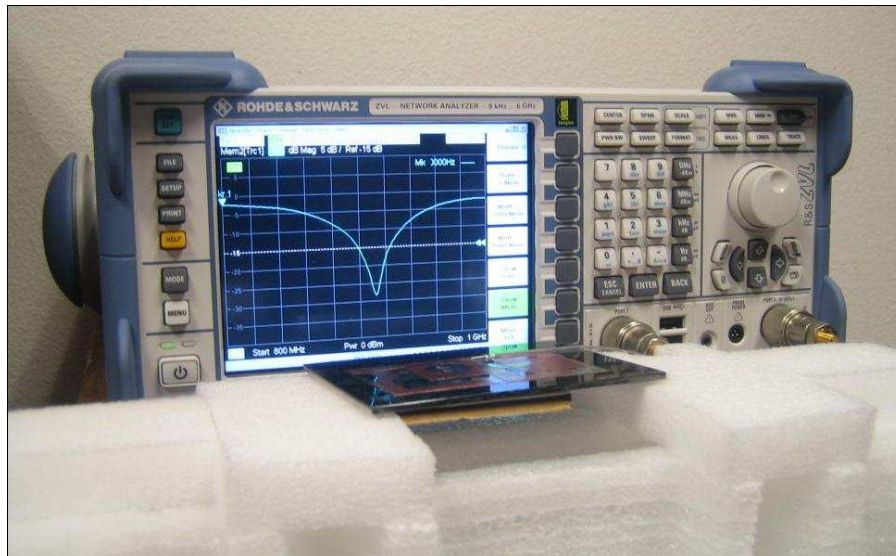


Figure 2. Network Analyzer.

IV. ANTENNA PARAMETERS

The next antenna parameter graphs like Return Loss, VSWR and smith chart were measured in the Agilent Rhode & Schwartz ZVL6 Vector Network Analyzer. The Gain, Efficiency and Radiation Patterns were measured in the ETS-Lindgren 3D Scan System.

A. Return Loss Data

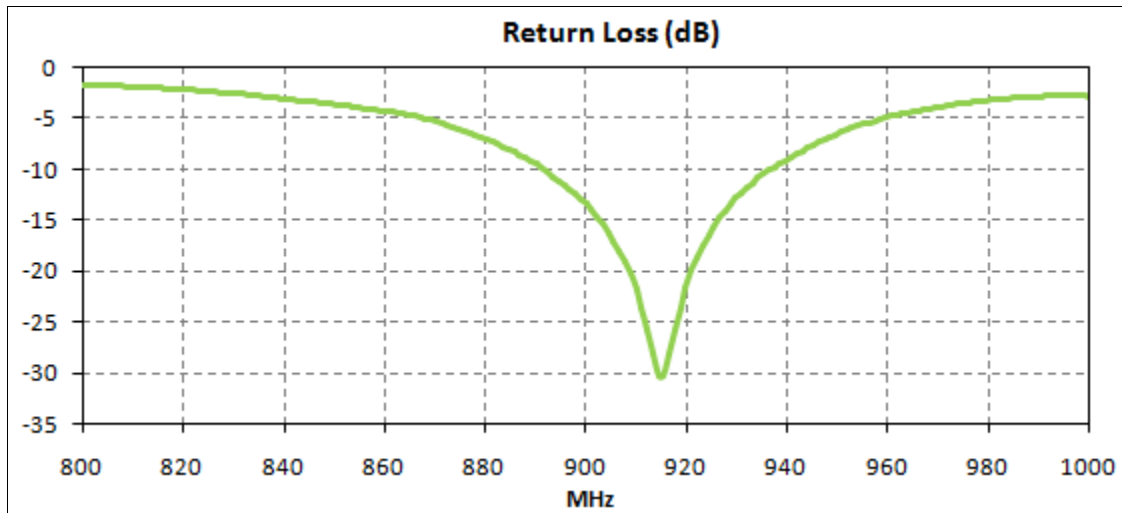


Figure 3. Return Loss for the FXP290 Antenna.

B. VSWR Data

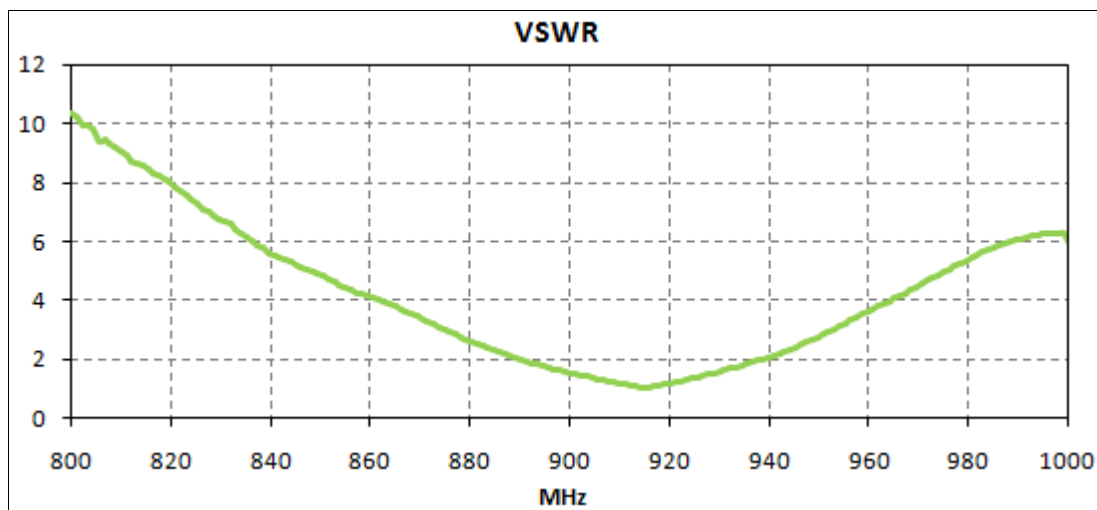


Figure 4. VSWR for the FXP290 Antenna.

C. Smith Chart Data

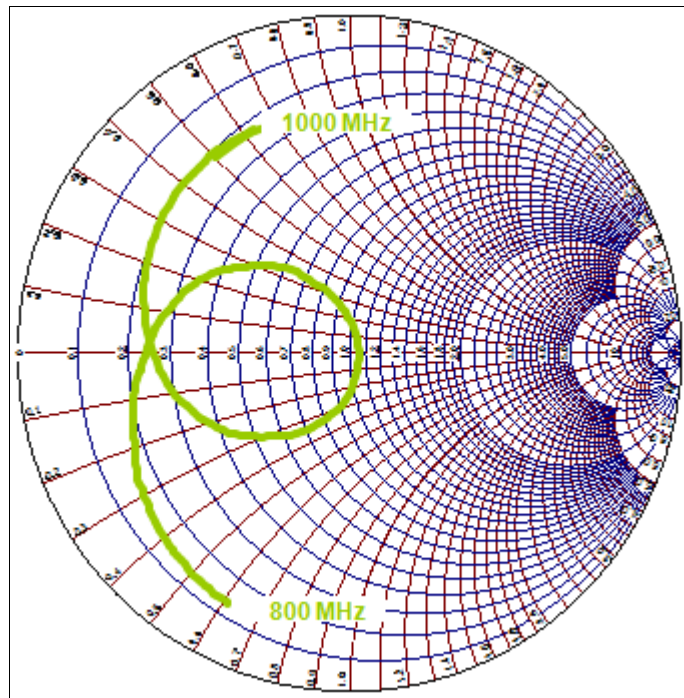


Figure 5. Smith Chart for the FXP290 Antenna.

D. Efficiency Data



Figure 6. Efficiency for the FXP290 Antenna.

E. Gain Data

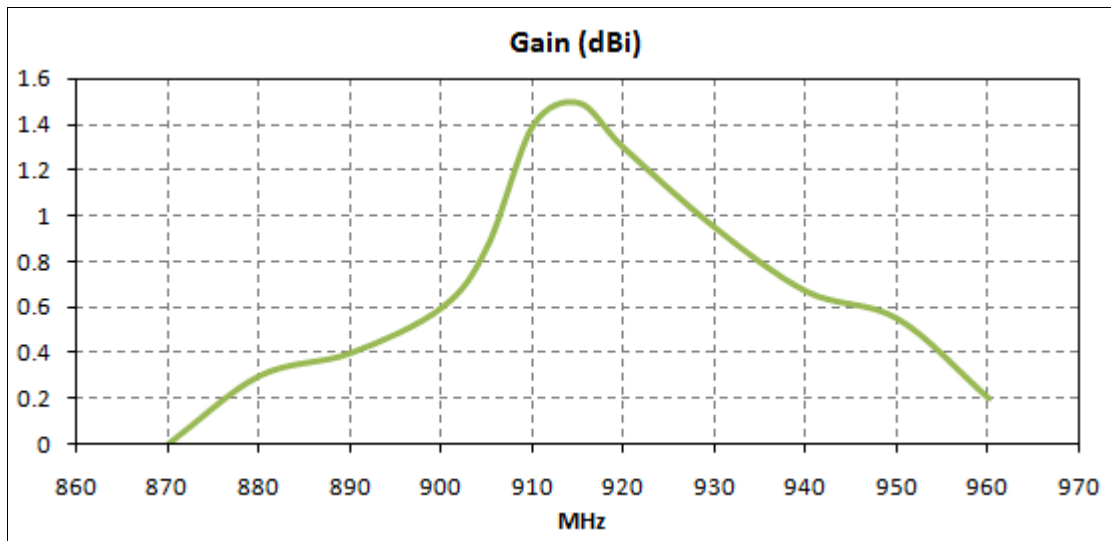


Figure 7. Gain for the FXP290 Antenna.

F. Radiation Pattern Data.

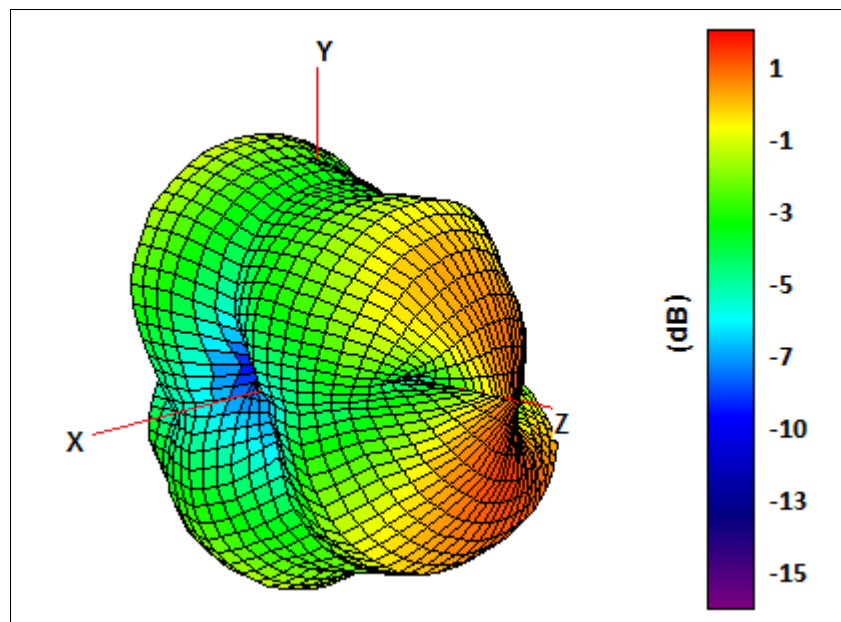


Figure 8. Radiation pattern 3D View, Figure 1 as reference (dB).

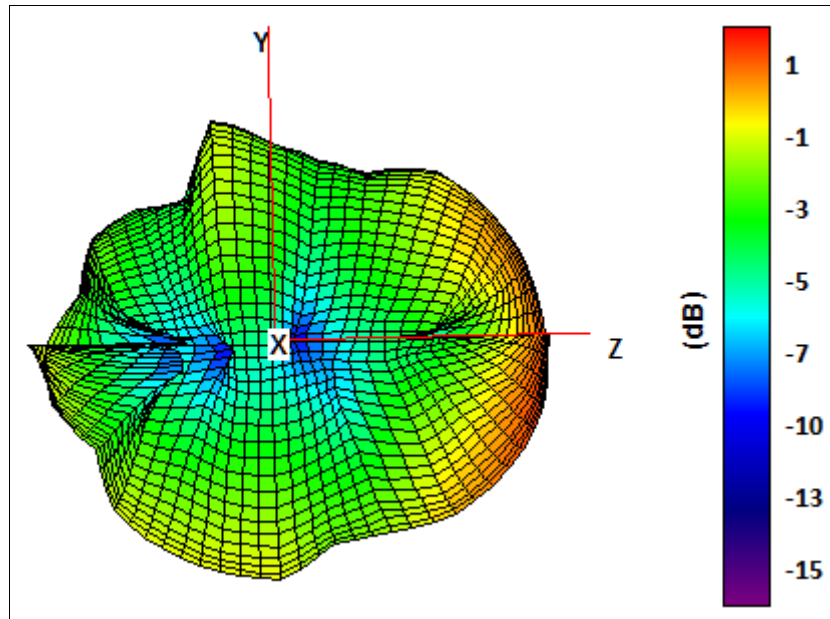


Figure 9. Radiation pattern YZ Plane, Figure 1 as reference (dB).

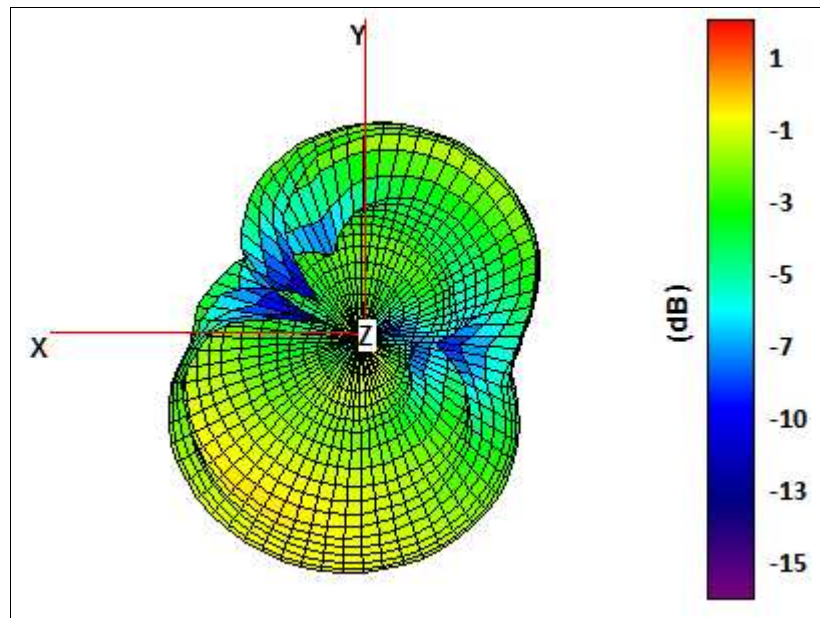


Figure 10. Radiation pattern XY plane, Figure 1 as reference (dB).


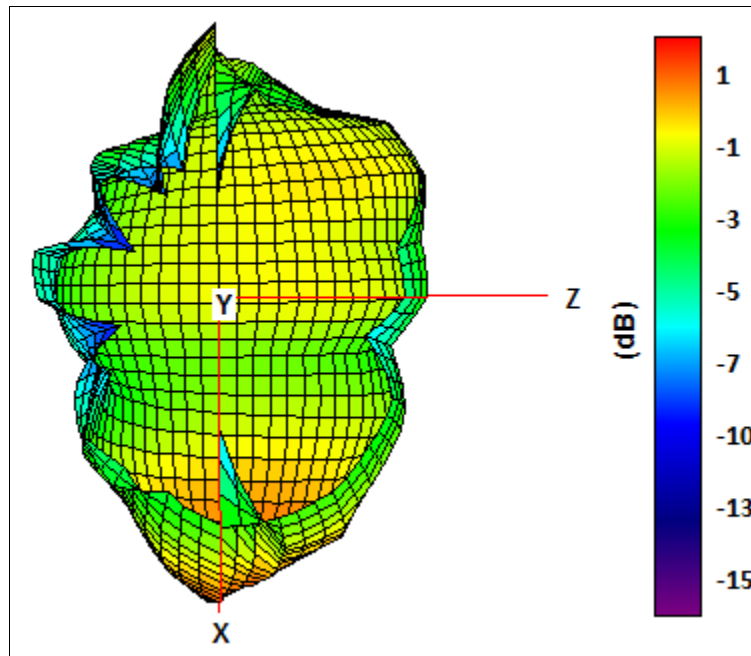



Figure 11. Radiation pattern XY plane, Figure 1 as reference (dB).

V. MECHANICAL DRAWING



XXX.	±2.0	PART NO		PRODUCT NAME			
XX.	±1.0	FXP290		FXP290 915 MHz ISM Band Antenna			
X.	±0.5						
.X	±0.1	REV	UNIT	SCALE	SIZE	SHEET	CUSTOMER
.XX	±0.05	A	mm	1/1	A 4	1 OF 1	taoglas

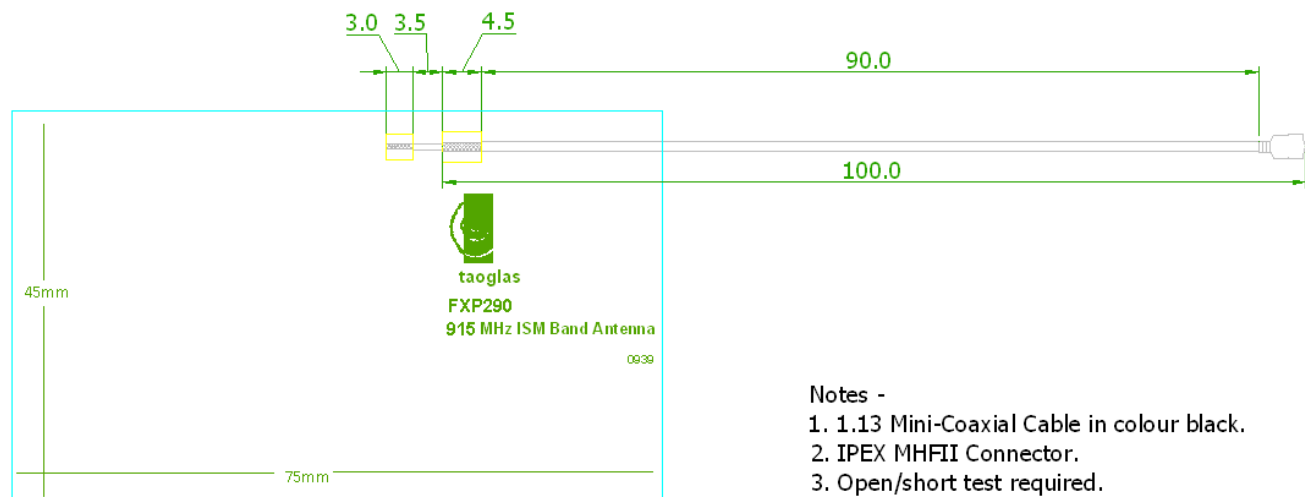

taoglas
SD Design Centre

This drawing and its inherent design concepts are property of taoglas. It should not be copied or given to third parties without the written consent of taoglas.

Figure 12. Mechanical Drawing for the FXP290 Antenna.