



## Hall Effect Current Sensors S26P200D15Y

### Features:

- Closed Loop type
- Current or voltage output
- Conversion ratio  $K_N = 1:2000$
- Printed circuit board mounting
- Aperture
- Insulated plastic case according to . UL94V0


### Advantages:


- Excellent accuracy and linearity
- Low temperature drift
- Wide frequency bandwidth
- No insertion loss
- High Immunity to external interferences
- Optimised response time
- Current overload capability

Specifications	-	<ul> <li>UL Recognition</li> <li>Current overload capability</li> <li>T<sub>A</sub>=25°C, V<sub>CC</sub>=±15V</li> </ul>		
Parameters	Symbol	S26P200D15Y		
Primary nominal current	l <sub>f</sub>	200A	300A	
Maximum current <sup>1</sup> (at 85°C)	I <sub>fmax</sub>	± 350A (at R <sub>M</sub> ≤ 5Ω)		
Measuring resistance (at 85°C)	R <sub>M</sub>	$0\Omega \sim 26\Omega$ (at V <sub>CC</sub> = ±12V) $0\Omega \sim 56\Omega$ (at V <sub>CC</sub> = ±15V)	$0\Omega \sim 4\Omega \text{ (at V}_{CC} = \pm 12\text{V})^2$ $0\Omega \sim 8\Omega \text{ (at V}_{CC} = \pm 15\text{V})$	
Conversion Ratio	K <sub>N</sub>	1 : 2000		
Rated output current	lo	100mA	150mA	
Output current accuracy <sup>3</sup> (at I <sub>f</sub> )	Х	I <sub>O</sub> ± 0.4%		
Offset current <sup>4</sup> (at If=0A)	I <sub>Of</sub>	≤ ± 0.2mA		
Output linearity <sup>3</sup> (0A~If)	٤	≤ ± 0.15% (at I <sub>f</sub> )		
Power supply voltage <sup>1</sup>	V <sub>cc</sub>	± 12V ± 15V ± 5%		
Consumption current	Icc	≤ ± 16mA (Output current is not included)		
Response rime <sup>5</sup>	t <sub>r</sub>	≤ 1.0μs (at di/dt = 100A / μs)		
Thermal drift of gain <sup>6</sup>	Tclo	≤ ± 0.01% / °C		
Thermal drift of offset current	Tclof	$\leq$ ± 0.5mA max (at T <sub>A</sub> = $-40^{\circ}$ C $\Leftrightarrow$ +85 $^{\circ}$ C)		
Hysteresis error	I <sub>OH</sub>	$\leq 0.3$ mA (@ $\mathbf{I_f} = 0$ A $\rightarrow \mathbf{I_f} \rightarrow \mathbf{I_f} = 0$ A)		
Insulation voltage	$V_d$	AC 3000V, for 1minute (sensing current 0.5mA), inside of through hole ⇔ terminal		
Insulation resistance	R <sub>IS</sub>	≥ 500MΩ (@ DC 500V) , inside of through hole ⇔ terminal		
Secondary coil resistance	Rs	$60\Omega$ (at T <sub>A</sub> = 70°C), $65\Omega$ (at T <sub>A</sub> = 85°C)		
Ambient operation temperature	T <sub>A</sub>	− 40°C ~ +85°C		
Ambient storage temperature	Ts	− 40°C ~ +90°C		
	2			

 $<sup>^{1}</sup>$  Maximum current is restricted by V<sub>CC</sub> —  $^{2}$  I<sub>f</sub> = 250A —  $^{3}$  Without offset current—  $^{4}$  After removal of core hysteresis—  $^{5}$  Time between 90% input current full scale and 90% of sensor output full scale —  $^{6}$  Without Thermal drift of offset current

### **Electrical Performances**














# Hall Effect Current Sensors S26P200D15Y

### **Mechanical dimensions**

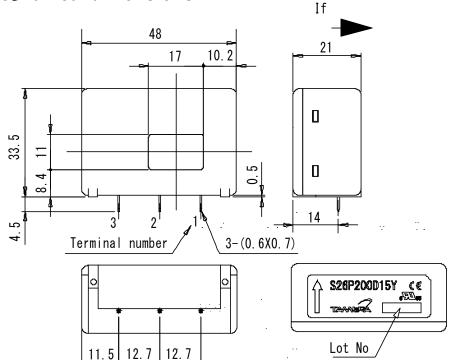

#### **NOTES**


- 1. Unit is mm
- 2. Tolerance is 0.5mm


#### Terminal number:

- 1. +Vcc(+15V)
- 2. I<sub>OUT</sub>
- 3. -Vcc(-15V)

# **Electrical connection diagram**

(25.4)





S26P200D15Y At  $I_f$  = 200A &  $V_{CC}$  = ±15 $V_{DC}$ 0Ω ≤  $R_M$  ≤ 56Ω

# **UL Standard**

UL 508, CSA C22.2 No.14 (UL FILE No.E243511)

- For use in Pollution Degree 2 Environment.
- Maximum Surrounding air temperature rating, 85°C.

### CAUTION

Do not wrap the primary conductor around the core part of the product to increase measured current.

# **Package & Weight Information**

Weight	Pcs/box	Pcs/carton	Pcs/pallet
45g	50	200	5400





