



## ELECTRICAL CHARACTERISTICS (T<sub>case</sub> = 25°C unless otherwise stated)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
BV <sub>DSS</sub> Drain–Source Breakdown Voltage	V <sub>GS</sub> = 0 I <sub>D</sub> = 10mA	40			V
I <sub>DSS</sub> Zero Gate Voltage Drain Current	V <sub>DS</sub> = 12.5V V <sub>GS</sub> = 0			2	mA
I <sub>GSS</sub> Gate Leakage Current	V <sub>GS</sub> = 20V V <sub>DS</sub> = 0			1	μA
V <sub>GS(th)</sub> Gate Threshold Voltage*	I <sub>D</sub> = 10mA V <sub>DS</sub> = V <sub>GS</sub>	1		7	V
g <sub>fs</sub> Forward Transconductance*	V <sub>DS</sub> = 10V I <sub>D</sub> = 0.4A	0.36			mhos
G <sub>PS</sub> Common Source Power Gain	P <sub>O</sub> = 5W	10			dB
η Drain Efficiency	V <sub>DS</sub> = 12.5V I <sub>DQ</sub> = 0.2A	40			%
VSWR Load Mismatch Tolerance	f = 1GHz	20:1			—
C <sub>iss</sub> Input Capacitance	V <sub>DS</sub> = 0V V <sub>GS</sub> = -5V f = 1MHz			24	pF
C <sub>oss</sub> Output Capacitance	V <sub>DS</sub> = 12.5V V <sub>GS</sub> = 0 f = 1MHz			20	pF
C <sub>rss</sub> Reverse Transfer Capacitance	V <sub>DS</sub> = 12.5V V <sub>GS</sub> = 0 f = 1MHz			2	pF

\* Pulse Test: Pulse Duration = 300 μs , Duty Cycle ≤ 2%

## HAZARDOUS MATERIAL WARNING

The ceramic portion of the device between leads and metal flange is beryllium oxide. Beryllium oxide dust is highly toxic and care must be taken during handling and mounting to avoid damage to this area.

**THESE DEVICES MUST NEVER BE THROWN AWAY WITH GENERAL INDUSTRIAL OR DOMESTIC WASTE.**

## THERMAL DATA

R <sub>THj-case</sub>	Thermal Resistance Junction – Case	Max. 6.0°C / W
-----------------------	------------------------------------	----------------

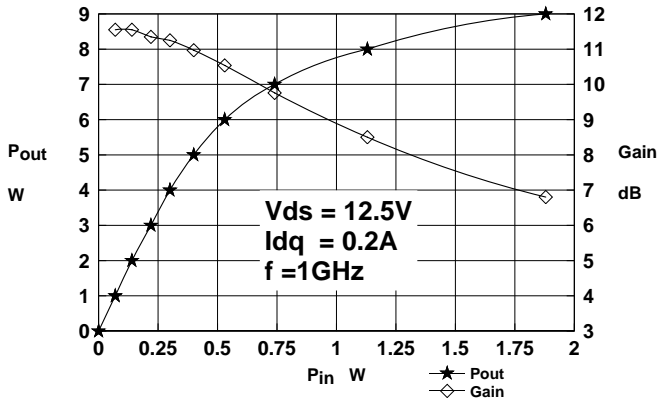


Figure 1

Output Power and Gain vs. Input Power

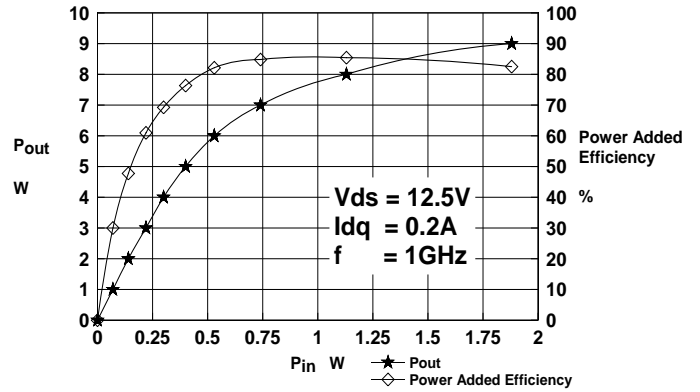


Figure 2

Efficiency vs. Output Power

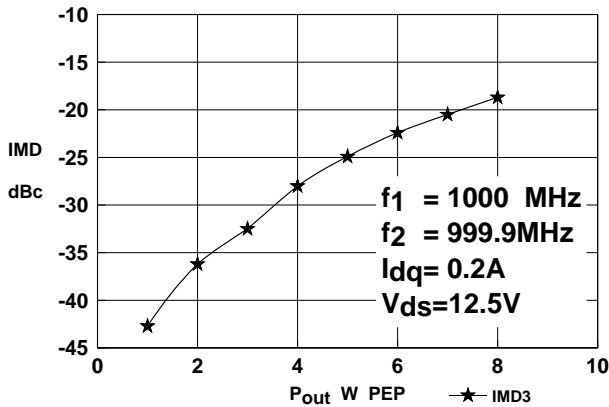


Figure 3

IMD3 vs. Output Power

OPTIMUM SOURCE AND LOAD IMPEDANCE

Frequency MHz	Z <sub>S</sub> Ω	Z <sub>L</sub> Ω
1000	4.0 - j27.0	4.7 - j28.7

Typical S Parameters

! V<sub>DS</sub> = 28V, I<sub>DQ</sub> = 0.4A  
# MHZ S M A R 50

IFreq !MHz	S11		S21		S12		S22	
	mag	ang	mag	ang	mag	ang	mag	ang
100	0.79	-93.3	16.4	116.9	0.032	24.7	0.66	-90.5
200	0.73	-126.4	8.8	85.7	0.031	2.6	0.67	-123.5
300	0.74	-140.7	5.8	71.7	0.027	-4.7	0.72	-137.7
400	0.77	-151.9	4.1	59.9	0.022	-7.4	0.75	-146.7
500	0.79	-160.0	3.2	52.1	0.017	-2.0	0.79	-153.1
600	0.83	-168.4	2.6	40.3	0.013	13.6	0.82	-158.3
700	0.85	-175.2	2.1	29.8	0.012	38.2	0.84	-163.9
800	0.87	177.8	1.5	22.6	0.015	61.7	0.85	-170.1
900	0.88	172.9	1.2	24.0	0.021	77.9	0.87	-175.2
1000	0.89	167.4	1.2	19.9	0.030	81.0	0.87	-179.7

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders.

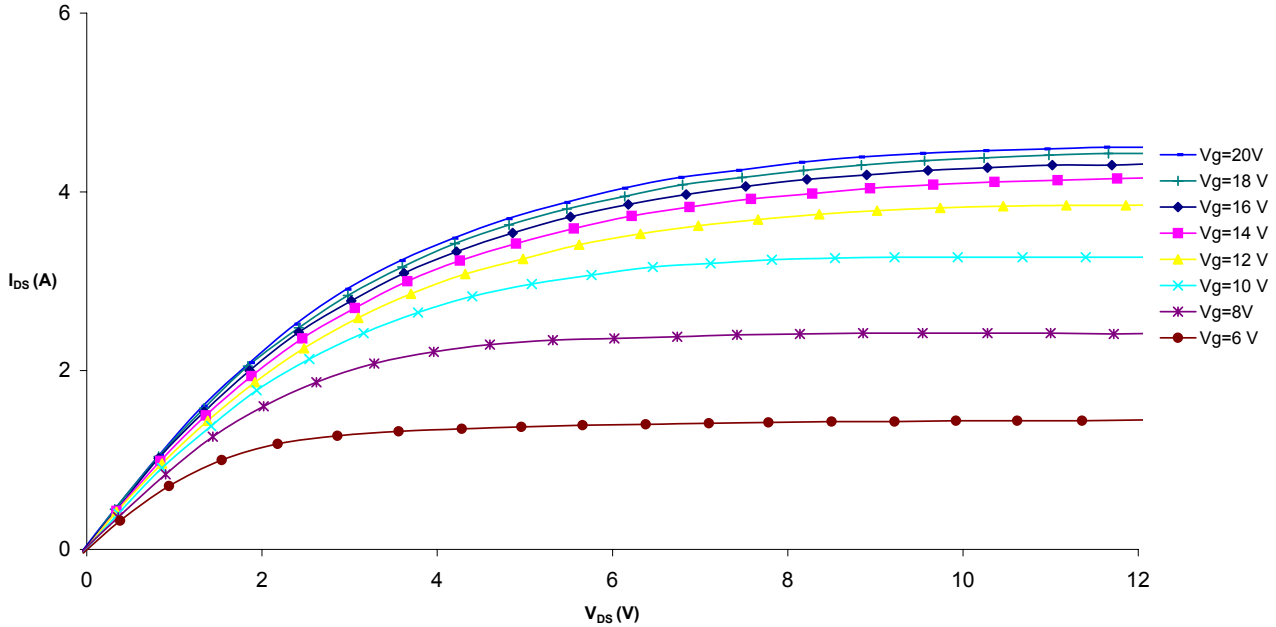


Figure 4 – Typical IV Characteristics.

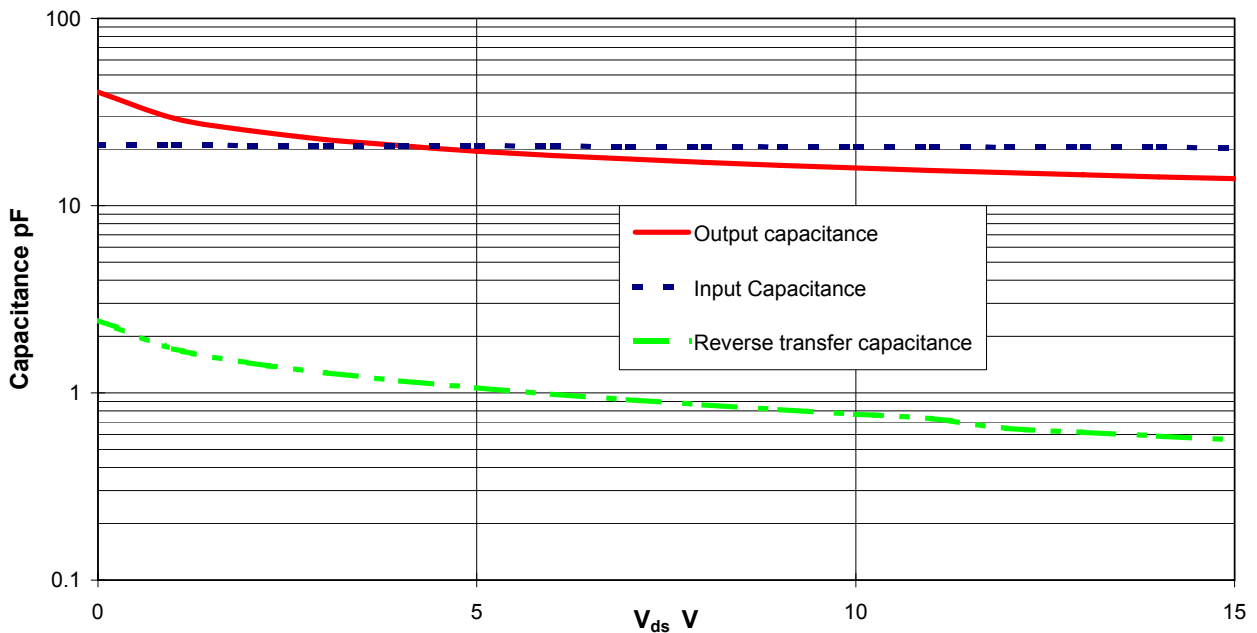


Figure 5 – Typical CV Characteristics.

Semelab Plc reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by Semelab is believed to be both accurate and reliable at the time of going to press. However Semelab assumes no responsibility for any errors or omissions discovered in its use. Semelab encourages customers to verify that datasheets are current before placing orders.

