

SN75126

Quadruple Line Driver

The SN75126 quadruple line driver is designed to meet the IBM 360/370 I/O specification A22-6974-3. The output voltage is 3.11 V minimum (at IOH = -59.3 mA) over the recommended ranges of supply voltage (4.5 V to 5.95 V) and temperature. Driver outputs use a fault-detection current-limit circuit to allow high drive current but still minimize power dissipation when the output is shorted to ground. The SN75126 is compatible with standard TTL logic and supply voltages.

Fault-flag circuitry is designed to sense and signal a line short on any Y line. Upon detecting an output fault condition, the fault-flag circuit forces the driver output into a low state and signals a fault condition by causing the fault-flag to go low.

Rochester Electronics Manufactured Components

Rochester branded components are manufactured using either die/wafers purchased from the original suppliers or Rochester wafers recreated from the original IP. All recreations are done with the approval of the OCM.

Parts are tested using original factory test programs or Rochester developed test solutions to guarantee product meets or exceeds the OCM data sheet.

Quality Overview

- ISO-9001
- AS9120 certification
- Qualified Manufacturers List (QML) MIL-PRF-38535
 - Class Q Military
 - Class V Space Level
- Qualified Suppliers List of Distributors (QSLD)
 - Rochester is a critical supplier to DLA and meets all industry and DLA standards.

Rochester Electronics, LLC is committed to supplying products that satisfy customer expectations for quality and are equal to those originally supplied by industry manufacturers.

The original manufacturer's datasheet accompanying this document reflects the performance and specifications of the Rochester manufactured version of this device. Rochester Electronics guarantees the performance of its semiconductor products to the original OEM specifications. 'Typical' values are for reference purposes only. Certain minimum or maximum ratings may be based on product characterization, design, simulation, or sample testing.

SN75126 QUADRUPLE LINE DRIVER

SLLS060B - FEBRUARY 1990 - REVISED MAY 1995

- Meets or Exceeds the Requirements of IBM™ System 360/370 Input/Output Interface Specification GA22-6974-3
- Minimum Output Voltage of 3.11 V at $I_{OH} = -59.3$ mA
- Fault-Flag Circuit Output Signals Driver Output Fault
- Fault-Detection Current-Limit Circuit Minimizes Power Dissipation During a Fault Condition
- Dual Common Enable
- Individual Fault Flags
- Designed to Replace the MC3481

description


The SN75126 quadruple line driver is designed to meet the IBM 360/370 I/O specification A22-6974-3. The output voltage is 3.11 V minimum (at $I_{OH} = -59.3$ mA) over the recommended ranges of supply voltage (4.5 V to 5.95 V) and temperature. Driver outputs use a fault-detection current-limit circuit to allow high drive current but still minimize power dissipation when the output is shorted to ground. The SN75126 is compatible with standard TTL logic and supply voltages.

Fault-flag circuitry is designed to sense and signal a line short on any Y line. Upon detecting an output fault condition, the fault-flag circuit forces the driver output into a low state and signals a fault condition by causing the fault-flag output to go low.

The SN75126 can drive a 50-Ω load or a 90-Ω load as used in many I/O systems. Optimum performance can be achieved when the device is used with either the SN75128 or SN75129 line receivers. Also, see the SN751730 for new 360/370 interface designs.

The SN75126 is characterized for operation from 0°C to 70°C.

D OR N PACKAGE
(TOP VIEW)



FUNCTION TABLE

| INPUTS | | OUTPUTS | |
|--------|---|---------|---|
| G | A | Y | F |
| L | X | L | H |
| H | H | H | H |
| H | H | S | L |

H = high level,
L = low level,
X = irrelevant,
S = shorted to ground

IBM is a trademark of International Business Machines Corp.

PRODUCTION DATA Information is current as of publication date. Products conform to specifications per the terms of Texas Instruments standard warranty. Production processing does not necessarily include testing of all parameters.

 **TEXAS
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265


Copyright © 1995, Texas Instruments Incorporated

8961724 0098476 643

SN75126 QUADRUPLE LINE DRIVER


SLLS060B - FEBRUARY 1990 - REVISED MAY 1995

logic symbol†

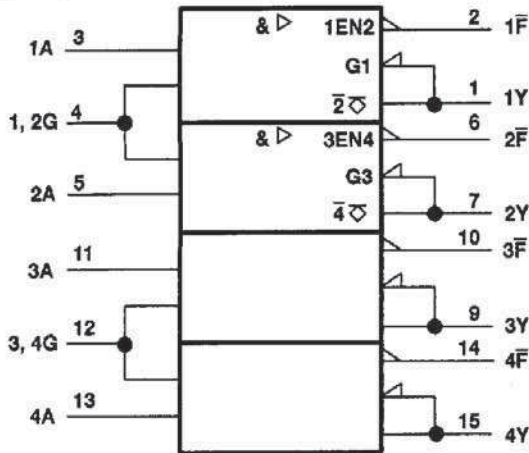


† This symbol is in accordance with ANSI/IEEE Std 91-1984 and IEC Publication 617-12.

logic diagram (positive logic)

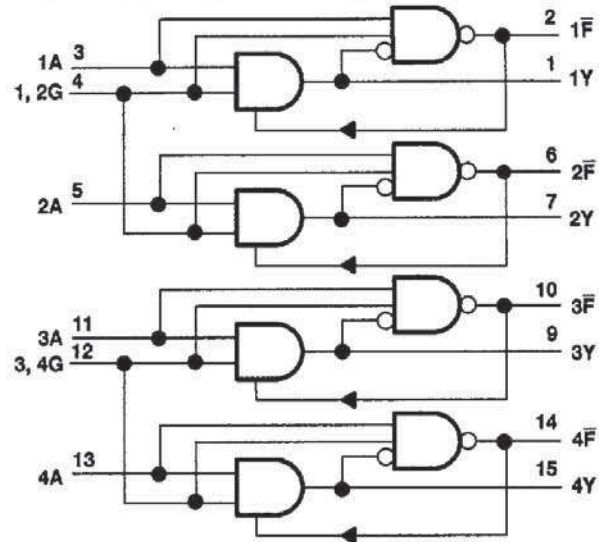

schematics of inputs and outputs

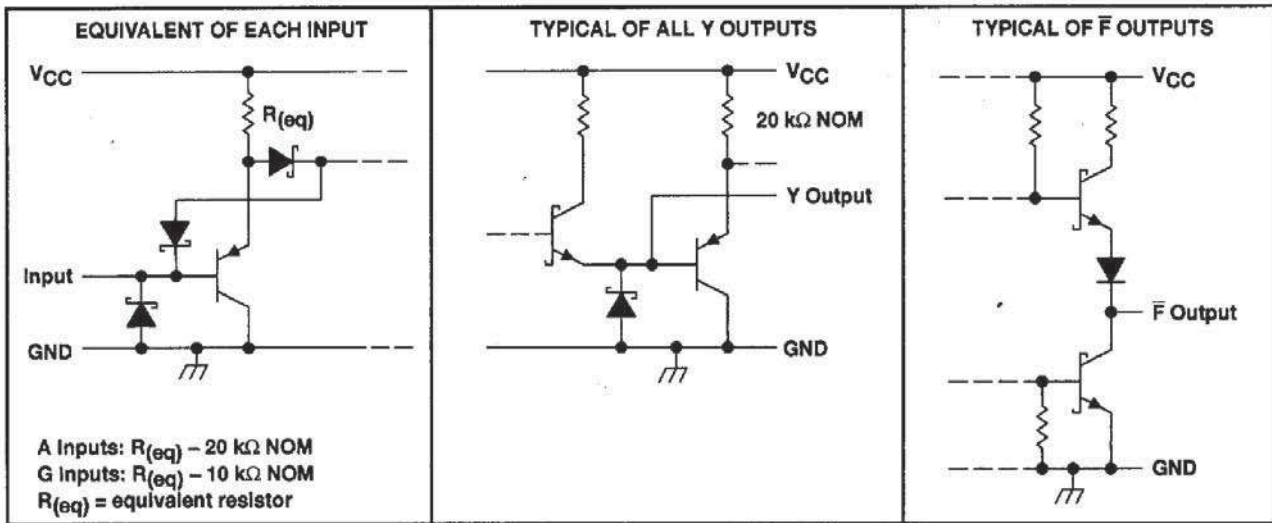

absolute maximum ratings over operating free-air temperature range (unless otherwise noted)†

| | |
|--------------------------------------------------------------|------------------------------|
| Supply voltage, V_{CC} | 7 V |
| Input voltage, V_I | 7 V |
| Continuous total power dissipation | See Dissipation Rating Table |
| Operating free-air temperature range, T_A | 0°C to 70°C |
| Storage temperature range, T_{stg} | -65°C to 150°C |
| Lead temperature 1,6 mm (1/16 inch) from case for 10 seconds | 260°C |

† Stresses beyond those listed under "absolute maximum ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated under "recommended operating conditions" is not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

8961724 0098477 58T

TEXAS
INSTRUMENTS

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

SN75126 QUADRUPLE LINE DRIVER

SLLS060B - FEBRUARY 1990 - REVISED MAY 1995

DISSIPATION RATING TABLE

| PACKAGE | $T_A \leq 25^\circ\text{C}$ POWER RATING | DERATING FACTOR ABOVE $T_A = 25^\circ\text{C}$ | $T_A = 70^\circ\text{C}$ POWER RATING |
|---------|---------------------------------------------|---------------------------------------------------|------------------------------------------|
| D | 950 mW | 7.6 mW/ $^\circ\text{C}$ | 608 mW |
| N | 1150 mW | 9.2 mW/ $^\circ\text{C}$ | 736 mW |

recommended operating conditions

| | MIN | NOM | MAX | UNIT |
|---------------------------------------|-----|-----|-------|------------------|
| Supply voltage, V_{CC} | 4.5 | 5 | 5.95 | V |
| High-level input voltage, V_{IH} | 2 | | | V |
| Low-level input voltage, V_{IL} | | | 0.8 | V |
| High-level output current, I_{OH} | | | -59.3 | mA |
| Operating free-air temperature, T_A | 0 | | 70 | $^\circ\text{C}$ |

electrical characteristics over recommended operating free-air temperature range

| PARAMETER | | TEST CONDITIONS | | MIN | MAX | UNIT |
|--------------|----------------------------------|-----------------|----------------------------------------------------------------------------------------|------|------|---------------|
| V_{IK} | Input clamp voltage | A, G | $V_{CC} = 4.5\text{ V}$, $I_I = -18\text{ mA}$ | | -1.5 | V |
| V_{OH} | High-level output voltage | Y | $V_{CC} = 4.5\text{ V}$, $I_{OH} = -59.3\text{ mA}$, $V_{IH} = 2\text{ V}$ | 3.11 | | V |
| | | Y | $V_{CC} = 5.25\text{ V}$, $I_{OH} = -41\text{ mA}$, $V_{IH} = 2\text{ V}$ | 3.9 | | |
| | | \bar{F} | $V_{CC} = 4.5\text{ V}$, $I_{OH} = -400\text{ }\mu\text{A}$, $V_{IH} = 2\text{ V}$ | 2.5 | | |
| V_{OL} | Low-level output voltage | Y | $V_{CC} = 5.5\text{ V}$, $I_{OL} = -240\text{ }\mu\text{A}$, $V_{IL} = 0.8\text{ V}$ | | 0.15 | V |
| | | Y | $V_{CC} = 5.95\text{ V}$, $I_{OL} = -1\text{ mA}$, $V_{IL} = 0.8\text{ V}$ | | 0.15 | |
| | | \bar{F} | $V_{CC} = 4.5\text{ V}$, $I_{OL} = 8\text{ mA}$, $V_{IH} = 2\text{ V}$, Y at 0 V | | 0.5 | |
| $I_{O(off)}$ | Off-state output current | Y | $V_{CC} = 4.5\text{ V}$, $V_I = 0$, $V_O = 3.11\text{ V}$ | | 100 | μA |
| | | Y | $V_{CC} = 0$, $V_I = 0$, $V_O = 3.11\text{ V}$ | | 200 | |
| I_I | Input current | A | $V_{CC} = 4.5\text{ V}$, $V_I = 5.5\text{ V}$ | | 100 | μA |
| | | G | | 200 | | |
| I_{IH} | High-level input current | A | $V_{CC} = 4.5\text{ V}$, $V_I = 2.7\text{ V}$ | | 20 | μA |
| | | G | | 40 | | |
| I_{IL} | Low-level input current | A | $V_{CC} = 5.95\text{ V}$, $V_I = 0.4\text{ V}$ | | -250 | μA |
| | | G | | -500 | | |
| I_{OS} | Short-circuit output current | Y | $V_{CC} = 5.5\text{ V}$, $V_O = 0$, $V_{IH} = 2.7\text{ V}$ | | -5 | mA |
| | | \bar{F} | $V_{CC} = 5.5\text{ V}$, $V_O = 0$ | -15 | -100 | |
| | | Y | $V_{CC} = 5.95\text{ V}$, $V_O = 0$, $V_{IH} = 2.7\text{ V}$ | | -5 | |
| | | \bar{F} | $V_{CC} = 5.95\text{ V}$, $V_O = 0$ | -15 | -110 | |
| I_{CCH} | Supply current, all outputs high | | $V_{CC} = 5.5\text{ V}$, No load, $V_{IH} = 2\text{ V}$ | | 70 | mA |
| | | | $V_{CC} = 5.95\text{ V}$, No load, $V_{IH} = 2\text{ V}$ | | 80 | |
| I_{CCL} | Supply current, Y outputs low | | $V_{CC} = 5.5\text{ V}$, No load, $V_{IL} = 0.8\text{ V}$ | | 55 | mA |
| | | | $V_{CC} = 5.95\text{ V}$, No load, $V_{IL} = 0.8\text{ V}$ | | 70 | |



POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

8961724 0098478 416


SN75126 QUADRUPLE LINE DRIVER

SLLS060B - FEBRUARY 1990 - REVISED MAY 1995

switching characteristics at $T_A = 25^\circ\text{C}$

| PARAMETER | FROM (INPUT) | TO (OUTPUT) | TEST CONDITIONS | MIN | MAX | UNIT |
|-------------------------------------------------------------|--------------|-------------|-----------------------------------------------------------------------------------------------------------------------------------------------------|-----|-----|------|
| t_{PLH} Propagation delay time, low- to high-level output | A | Y | $V_{CC} = 4.5\text{ V to } 5.5\text{ V},$ $R_L = 50\ \Omega,$ $C_L = 50\text{ pF},$ $V_{OH(ref)} = 3.11\text{ V},$ See Figures 1 and 2 | | 40 | ns |
| t_{PHL} Propagation delay time, high- to low-level output | | | | | 37 | ns |
| $\frac{t_{PLH}}{t_{PHL}}$ Ratio of propagation delay times | | | | 0.3 | 3 | |
| t_{PLH} Propagation delay time, low- to high-level output | A | Y | $V_{CC} = 5.25\text{ V to } 5.95\text{ V},$ $R_L = 90\ \Omega,$ $C_L = 50\text{ pF},$ $V_{OH(ref)} = 3.9\text{ V},$ See Figures 1 and 2 | | 45 | ns |
| t_{PHL} Propagation delay time, high- to low-level output | | | | | 45 | ns |
| t_{PLH} Propagation delay time, low- to high-level output | A | F | $V_{CC} = 5\text{ V},$ $C_L = 15\text{ pF},$ $R_L = 2\text{ k}\Omega,$ See Figures 1 and 2 | | 60 | ns |
| t_{PHL} Propagation delay time, high- to low-level output | | | | | 100 | ns |

PARAMETER MEASUREMENT INFORMATION

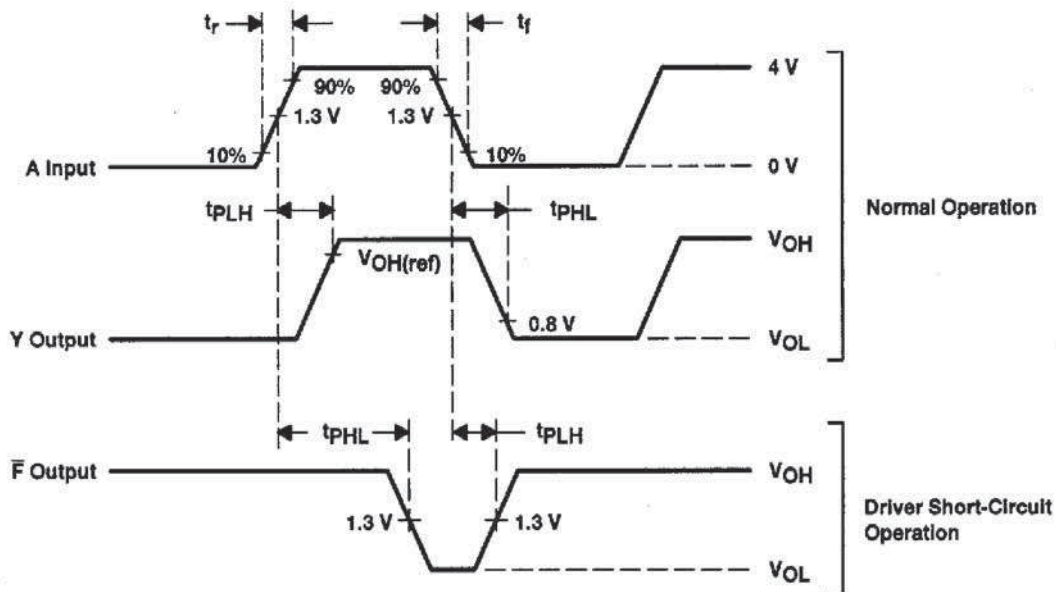

NOTE: The input pulse is supplied by a generator having the following characteristics: PRR $\leq 1\text{ MHz}$, duty cycle $\leq 50\%$, $t_r \leq 6\text{ ns}$, $t_f \leq 6\text{ ns}$, $Z_0 = 50\ \Omega$.


Figure 1. Input and Output Voltage Waveforms

8961724 0098479 352

**TEXAS
INSTRUMENTS**

POST OFFICE BOX 655303 • DALLAS, TEXAS 75265

PARAMETER MEASUREMENT INFORMATION

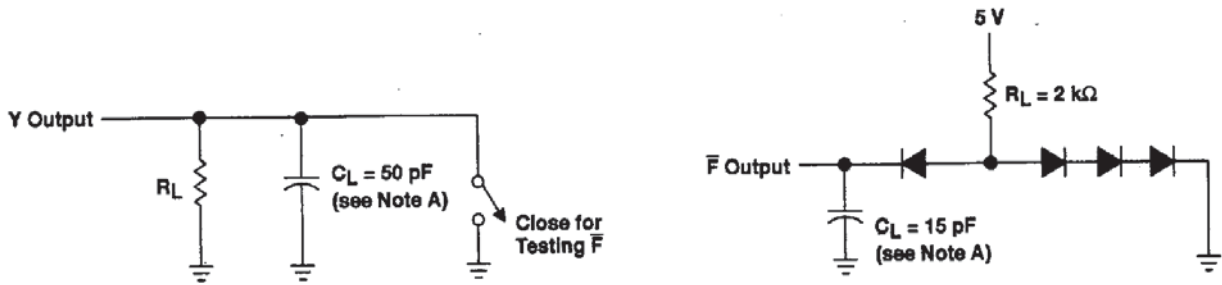

NOTE A: C_L includes probe and stray capacitance.

Figure 2. Switching Characteristics Load Circuits