



3Q Hi-Com Triac Rev. 3 — 9 May 2011

Product data sheet

1. Product profile

1.1 General description

Planar passivated high commutation three quadrant triac in a SOT78 (TO-220AB) plastic package intended for use in circuits where high static and dynamic dV/dt and high dl/dt can occur. This "series C" triac will commutate the full rated RMS current at the maximum rated junction temperature without the aid of a snubber.

1.2 Features and benefits

- 3Q technology for improved noise immunity
- High blocking voltage capability
- High commutation capability with maximum false trigger immunity
- High immunity to false turn-on by dV/dt

1.3 Applications

- General purpose motor control circuits
- Home appliances

1.4 Quick reference data

Table 1. Quick reference data

Symbol Parameter Conditions Unit Min Тур Max 800 V repetitive peak off-state VDRM voltage non-repetitive peak full sine wave; $T_{i(init)} = 25$ °C; А I_{TSM} _ 25 $t_p = 20 \text{ ms}; \text{ see } \frac{Figure 4}{Figure 4};$ on-state current see Figure 5 full sine wave; $T_{mb} \leq 107$ °C; RMS on-state current 4 А I_{T(RMS)} _ see Figure 1; see Figure 2; see Figure 3

- Less sensitive gate for high noise immunity
 Disper possiveted for voltage
- Planar passivated for voltage ruggedness and reliability
- Triggering in three quadrants only
- Rectifier-fed DC inductive loads e.g. DC motors and solenoids



3Q Hi-Com Triac

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
Static ch	aracteristics					
I _{GT}	gate trigger current	V _D = 12 V; I _T = 0.1 A; T2+ G+; T _j = 25 °C; see <u>Figure 7</u>	-	-	35	mA
		V _D = 12 V; I _T = 0.1 A; T2+ G-; T _j = 25 °C; see <u>Figure 7</u>	-	-	35	mA
		$V_D = 12 \text{ V}; \text{ I}_T = 0.1 \text{ A}; \text{ T2- G-};$ $T_j = 25 ^\circ\text{C}; \text{ see } \frac{\text{Figure 7}}{2}$	-	-	35	mA

2. Pinning information

Table 2.	Pinning	j information		
Pin	Symbol	Description	Simplified outline	Graphic symbol
1	T1	main terminal 1		N 1
2	T2	main terminal 2	mb	
3	G	gate		`G sym051
mb	T2	mounting base; main terminal 2		

2 SOT78 (TO-220AB)

3

Ordering information 3.


Type number	Package		
	Name	Description	Version
BTA204-800C	TO-220AB	plastic single-ended package; heatsink mounted; 1 mounting hole; 3-lead TO-220AB	SOT78
BTA204-800C/DG	TO-220AB	plastic single-ended package; heatsink mounted; 1 mounting hole; 3-lead TO-220AB	SOT78

4. Limiting values

Table 4. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions	Min	Мах	Unit
V _{DRM}	repetitive peak off-state voltage		-	800	V
I _{T(RMS)}	RMS on-state current	full sine wave; T _{mb} ≤ 107 ℃; see <u>Figure 1;</u> see <u>Figure 2</u> ; see <u>Figure 3</u>	-	4	A
I _{TSM}	non-repetitive peak on-state current	full sine wave; T _{j(init)} = 25 °C; t _p = 20 ms; see <u>Figure 4</u> ; see <u>Figure 5</u>	-	25	A
		full sine wave; $T_{j(init)} = 25 $ °C; $t_p = 16.7 $ ms	-	27	А
l ² t	I ² t for fusing	t _p = 10 ms; sine-wave pulse	-	3.1	A ² s
dl _T /dt	rate of rise of on-state current	$I_T = 6 \text{ A}; I_G = 0.2 \text{ A}; \text{ d}I_G/\text{d}t = 0.2 \text{ A}/\mu\text{s}$	-	100	A/µs
I _{GM}	peak gate current		-	2	А
P _{GM}	peak gate power		-	5	W
P _{G(AV)}	average gate power	over any 20 ms period	-	0.5	W
T _{stg}	storage temperature		-40	150	C
T _i	junction temperature		-	125	C

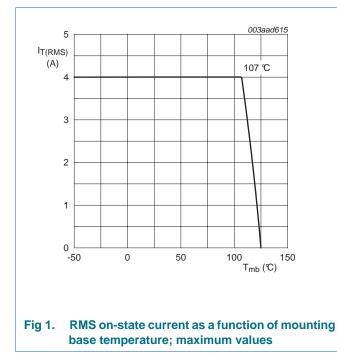






Fig 2. RMS on-state current as a function of surge duration; maximum values

BTA204-800C

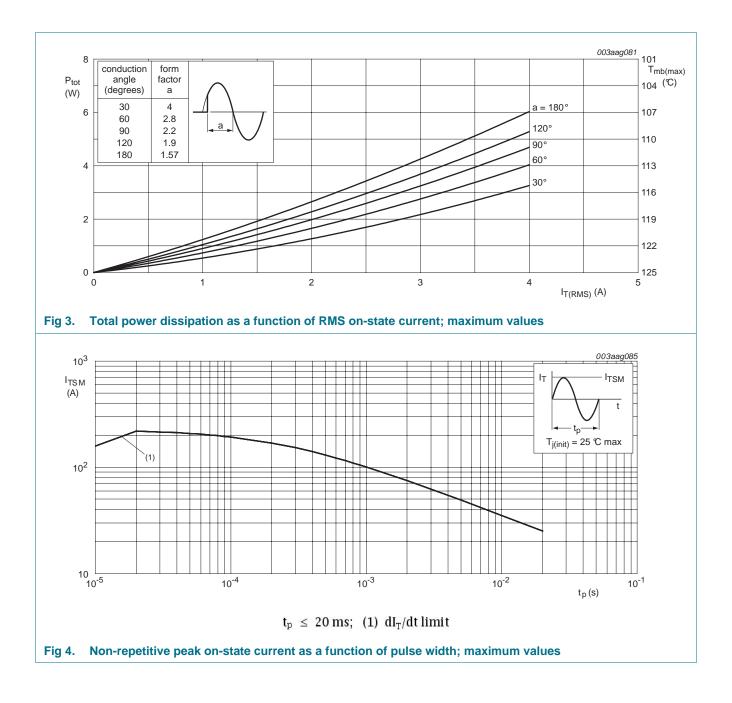


BTA204-800C

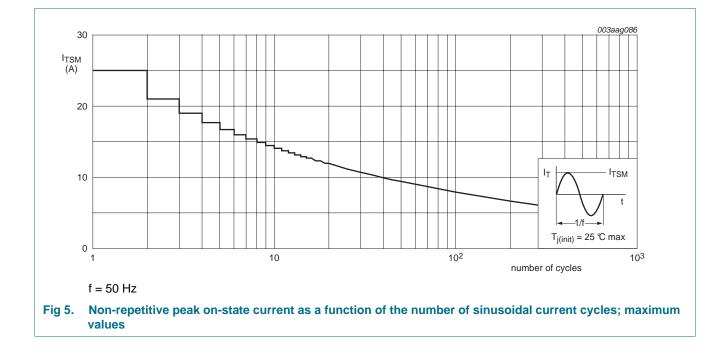

3Q Hi-Com Triac

Thermal characteristics 5.

Table 5.	Thermal characteristics					
Symbol	Parameter	Conditions	Min	Тур	Max	Unit
R _{th(j-mb)}	thermal resistance from junction to mounting base	full cycle; see Figure 6	-	-	3	K/W
		half cycle; see Figure 6	-	-	3.7	K/W
R _{th(j-a)}	thermal resistance from junction to ambient	in free air	-	60	-	K/W

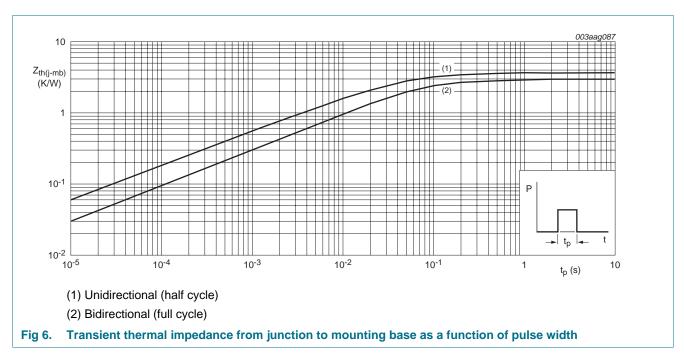


3Q Hi-Com Triac


6. Characteristics

Characteristics					
Parameter	Conditions	Min	Тур	Max	Unit
aracteristics					
gate trigger current	$V_D = 12 \text{ V}; I_T = 0.1 \text{ A}; \text{ T2+ G+}; \text{T}_j = 25 ^{\circ}\text{C};$ see <u>Figure 7</u>	-	-	35	mA
	$V_D = 12 \text{ V}; I_T = 0.1 \text{ A}; \text{ T2+ G-}; \text{T}_j = 25 ^{\circ}\text{C};$ see Figure 7	-	-	35	mA
	$V_D = 12 \text{ V}; \text{ I}_T = 0.1 \text{ A}; \text{ T2- G-}; \text{ T}_j = 25 ^{\circ}\text{C};$ see Figure 7	-	-	35	mA
latching current	V _D = 12 V; I _G = 0.1 A; T2+ G+; T _j = 25 °C; see <u>Figure 8</u>	-	-	20	mA
	$V_D = 12 \text{ V}; \text{ I}_G = 0.1 \text{ A}; \text{ T2+ G-}; \text{ T}_j = 25 \ ^{\circ}\text{C};$ see Figure 8		30	mA	
	$V_D = 12 \text{ V}; \text{ I}_G = 0.1 \text{ A}; \text{ T2- G-}; \text{ T}_j = 25 \ ^{\circ}\text{C};$ see Figure 8	-	-	20	mA
holding current	$V_D = 12 \text{ V}; \text{ T}_j = 25 \text{ C}; \text{ see } Figure 9$	-	-	20	mA
on-state voltage	$I_T = 5 \text{ A}; T_j = 25 \text{ C}; \text{ see } Figure 10$	-	1.4	1.7	V
gate trigger voltage	V _D = 12 V; I _T = 0.1 A; T _j = 25 ℃; see <u>Figure 11</u>	-	0.7	1.5	V
	V _D = 400 V; I _T = 0.1 A; T _j = 125 ℃; see <u>Figure 11</u>	0.25	0.4	-	V
off-state current	$V_{\rm D}$ = 800 V; $T_{\rm j}$ = 125 °C	-	0.1	0.5	mA
characteristics					
rate of rise of off-state voltage	V_{DM} = 536 V; T _j = 125 °C; exponential waveform; gate open circuit	1000	-	-	V/µs
rate of change of commutating current	$ V_D = 400 \text{ V}; \text{T}_j = 125 \text{C}; \text{I}_{\text{T}(\text{RMS})} = 4 \text{A}; \\ dV_{\text{com}}/\text{dt} = 20 \text{V}/\mu\text{s}; \text{snubberless} \\ condition; \text{ gate open circuit} $	3	-	-	A/ms
gate-controlled turn-on time	I_{TM} = 12 A; V _D = 800 V; I _G = 0.1 A; dI _G /dt = 5 A/µs	-	2	-	μs
	Parameter aracteristics gate trigger current latching current holding current on-state voltage gate trigger voltage off-state current characteristics rate of rise of off-state voltage rate of change of commutating current	ParameterConditionsaracteristicsgate trigger current $V_D = 12 V; I_T = 0.1 A; T2+ G+; T_j = 25 \ C;$ see Figure 7 $V_D = 12 V; I_T = 0.1 A; T2+ G-; T_j = 25 \ C;$ see Figure 7 $V_D = 12 V; I_T = 0.1 A; T2- G-; T_j = 25 \ C;$ see Figure 8Iatching current $V_D = 12 V; I_G = 0.1 A; T2+ G+;$ $T_j = 25 \ C;$ see Figure 8 $V_D = 12 V; I_G = 0.1 A; T2+ G-; T_j = 25 \ C;$ see Figure 8 $V_D = 12 V; I_G = 0.1 A; T2+ G-; T_j = 25 \ C;$ see Figure 8 $V_D = 12 V; I_G = 0.1 A; T2- G-; T_j = 25 \ C;$ see Figure 8holding current $V_D = 12 V; I_G = 0.1 A; T2- G-; T_j = 25 \ C;$ see Figure 8non-state voltage $I_T = 5 \ A; T_j = 25 \ C;$ see Figure 9on-state voltage $I_T = 5 \ A; T_j = 25 \ C;$ see Figure 10gate trigger voltage $V_D = 12 \ V; I_T = 0.1 \ A; T_j = 125 \ C;$ see Figure 11off-state current $V_D = 800 \ V; \ T_j = 125 \ C;$ see Figure 11off-state current $V_D = 536 \ V; \ T_j = 125 \ C;$ see figure 11off-state current $V_D = 400 \ V; \ T_j = 125 \ C;$ see Figure 11off-state current $V_D = 400 \ V; \ T_j = 125 \ C;$ see form 11rate of rise of off-state voltage $V_D = 400 \ V; \ T_j = 125 \ C; \ I_{T(RMS)} = 4 \ A;$ $dV_{com/dt} = 20 \ V/\mu;$ snubberless condition; gate open circuitgate-controlled turn-on time $I_{TM} = 12 \ A; \ V_D = 800 \ V; \ I_G = 0.1 \ A;$	$\begin{array}{ c c c c } \hline \mbox{Parameter} & \mbox{Conditions} & \mbox{Min} \\ \hline \mbox{practeristics} \\ \hline \mbox{gate trigger current} & V_{D} = 12 V; I_{T} = 0.1 A; T2 + G+; T_{J} = 25 \ensuremath{\mathbb{C}}; \\ \hline \mbox{see Figure 7} & \mbox{V}_{D} = 12 V; I_{T} = 0.1 A; T2 + G+; T_{J} = 25 \ensuremath{\mathbb{C}}; \\ \hline \mbox{see Figure 7} & \mbox{V}_{D} = 12 V; I_{T} = 0.1 A; T2 + G+; \\ \hline \mbox{V}_{D} = 12 V; I_{T} = 0.1 A; T2 + G+; \\ \hline \mbox{T}_{J} = 25 \ensuremath{\mathbb{C}}; \\ \hline \mbox{see Figure 8} & \mbox{V}_{D} = 12 V; I_{G} = 0.1 A; T2 + G+; \\ \hline \mbox{T}_{J} = 25 \ensuremath{\mathbb{C}}; \\ \hline \mbox{see Figure 8} & \mbox{V}_{D} = 12 V; I_{G} = 0.1 A; T2 + G+; \\ \hline \mbox{T}_{J} = 25 \ensuremath{\mathbb{C}}; \\ \hline \mbox{see Figure 8} & \mbox{V}_{D} = 12 V; I_{G} = 0.1 A; T2 + G+; \\ \hline \mbox{T}_{J} = 25 \ensuremath{\mathbb{C}}; \\ \hline \mbox{see Figure 8} & \mbox{V}_{D} = 12 V; I_{G} = 0.1 A; T2 + G-; \\ \hline \mbox{see Figure 8} & \mbox{V}_{D} = 12 V; I_{G} = 0.1 A; T2 + G-; \\ \hline \mbox{see Figure 8} & \mbox{V}_{D} = 12 V; I_{G} = 0.1 A; T2 + G-; \\ \hline \mbox{see Figure 9} & - \mbox{see Figure 8} & \mbox{V}_{D} = 12 V; I_{G} = 0.1 A; \\ \hline \mbox{see Figure 10} & - \mbox{see Figure 10} & - \mbox{see Figure 10} & - \mbox{see Figure 11} & \mbox{V}_{D} = 400 \ensuremath{V}; \\ \hline \mbox{J}_{D} = 400 \ensuremath{V}; \\ \hline \mbox{see Figure 11} & \mbox{V}_{D} = 400 \ensuremath{V}; \\ \hline \mbox{see Figure 11} & \mbox{V}_{D} = 800 \ensuremath{V}; \\ \hline \mbox{see Figure 11} & \mbox{see figure 12} \ensuremath{V}_{D} = 400 \ensuremath{V}_{D} = 400 \ensuremath{V}_{D} = 400 \ensuremath{V}_{D} = 400 \ensuremath{V}_{D} = 125 \ensuremath{C}; \\ \hline \mbox{see figure 0} & \mbox{see figure 0} \ensuremath{N}_{D} = 400 \ens$	$\begin{array}{ c c c c c c } \hline Parameter & Conditions & Min & Typ \\ \hline \mbox{tracteristics} \\ \hline \mbox{gate trigger current} & V_D = 12 V; I_T = 0.1 A; T2+ G+; T_j = 25 \mbox{C}; & - & - & - & - & - & - & - & - & - & $	$\begin{tabular}{ c c c c c } \hline Parameter & Conditions & Min & Typ & Max \\ \hline \mbox{tracteristics} & & & & & & & & & & & & & & & & & & &$

BTA204-800C

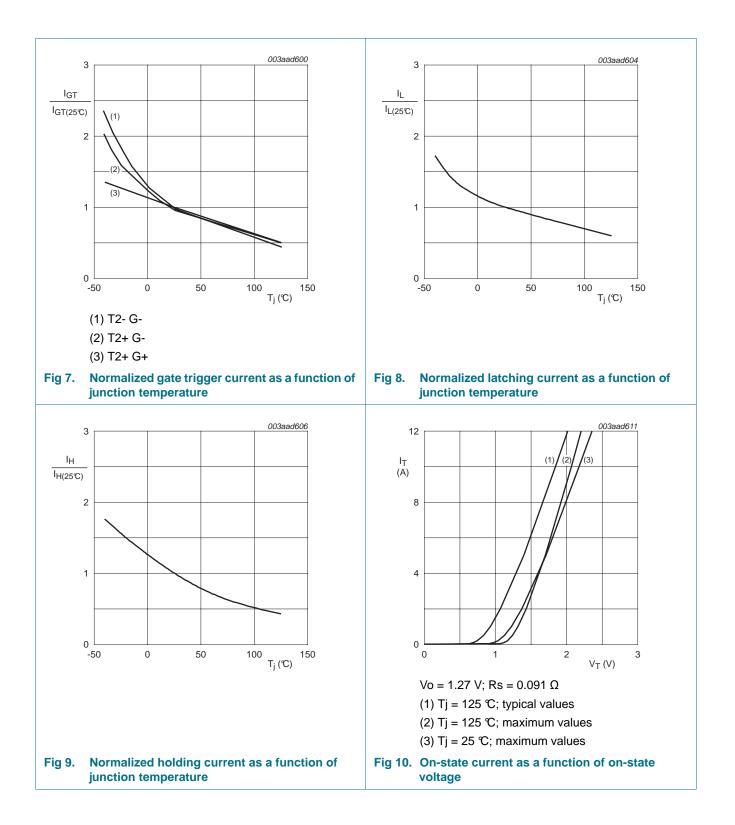

BTA204-800C

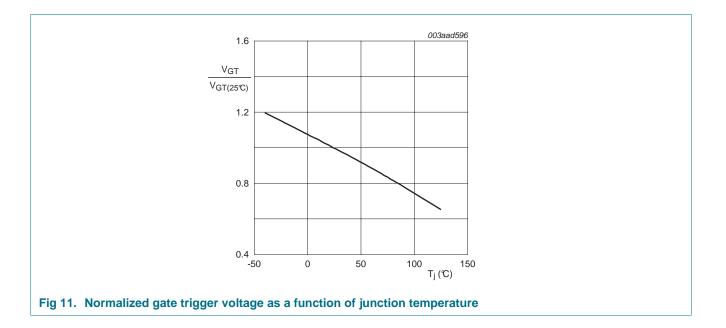

3Q Hi-Com Triac

Package outline 7.

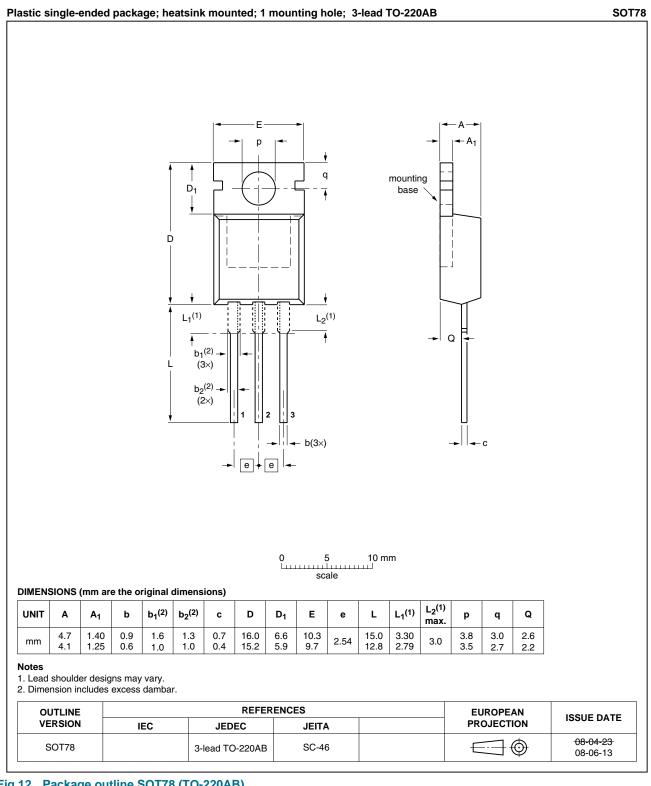


Fig 12. Package outline SOT78 (TO-220AB)

All information provided in this document is subject to legal disclaimers.

BTA204-800C

8. Revision history

Table 7. R	Revision history					
Document II	D	Release date	Data sheet status	Change notice	Supersedes	
BTA204-800	C v.3	20110509	Product data sheet	-	BTA204_SERIES_B_C v.2	
Modifications:		 The format of this data sheet has been redesigned to comply with the new identity guidelines of NXP Semiconductors. 				
		 Legal texts have 	ave been adapted to the r	new company name	where appropriate.	
		 Type number 	BTA204-800C separated	d from data sheet B	TA204_SERIES_B_C v.2.	
BTA204_SEI	RIES_B_C v.2	19981201	Product specification	-	BTA204_SERIES_B_C v.1	

11 of 14

9. Legal information

9.1 Data sheet status

Document status [1] [2]	Product status [3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <u>http://www.nxp.com</u>.

9.2 Definitions

Preview — The document is a preview version only. The document is still subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between NXP Semiconductors and its customer, unless NXP Semiconductors and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the NXP Semiconductors product is deemed to offer functions and qualities beyond those described in the Product data sheet.

9.3 Disclaimers

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of NXP Semiconductors.

Right to make changes — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors accepts no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Quick reference data — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

3Q Hi-Com Triac

Terms and conditions of commercial sale — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <u>http://www.nxp.com/profile/terms</u>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NXP Semiconductors hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NXP Semiconductors products by customer.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from national authorities.

Non-automotive qualified products — Unless this data sheet expressly states that this specific NXP Semiconductors product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. NXP Semiconductors accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

10. Contact information

For more information, please visit: <u>http://www.nxp.com</u>

For sales office addresses, please send an email to: salesaddresses@nxp.com

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without NXP Semiconductors' warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond NXP Semiconductors' specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies NXP Semiconductors for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond NXP Semiconductors' standard warranty and NXP Semiconductors' product specifications.

9.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

Adelante, Bitport, Bitsound, CoolFlux, CoReUse, DESFire, EZ-HV, FabKey, GreenChip, HiPerSmart, HITAG, I²C-bus logo, ICODE, I-CODE, ITEC, Labelution, MIFARE, MIFARE Plus, MIFARE Ultralight, MoReUse, QLPAK, Silicon Tuner, SiliconMAX, SmartXA, STARplug, TOPFET, TrenchMOS, TriMedia and UCODE — are trademarks of NXP B.V.

HD Radio and HD Radio logo — are trademarks of iBiquity Digital Corporation.

11. Contents

1	Product profile1
1.1	General description1
1.2	Features and benefits1
1.3	Applications1
1.4	Quick reference data1
2	Pinning information2
3	Ordering information2
4	Limiting values3
5	Thermal characteristics6
6	Characteristics7
7	Package outline10
8	Revision history11
9	Legal information12
9.1	Data sheet status12
9.2	Definitions12
9.3	Disclaimers
9.4	Trademarks
10	Contact information13

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

© NXP B.V. 2011.

All rights reserved.

For more information, please visit: http://www.nxp.com For sales office addresses, please send an email to: salesaddresses@nxp.com

Date of release: 9 May 2011 Document identifier: BTA204-800C