



Model Number


IUH-F190-V1-FR2-02

Read/Write head for IDENTControl -
Canada, United States and Mexico


Features

- Most flexible midrange UHF read/write head for worldwide use
- Ready-made PLC function blocks designed for quick and easy system integration
- Compact and robust housing for harsh industrial environments
- Switchable antenna polarization guarantees reliable tag detection and enhances process flow
- Multi-tag reading of up to 40 tags ensures increased productivity

Dimensions

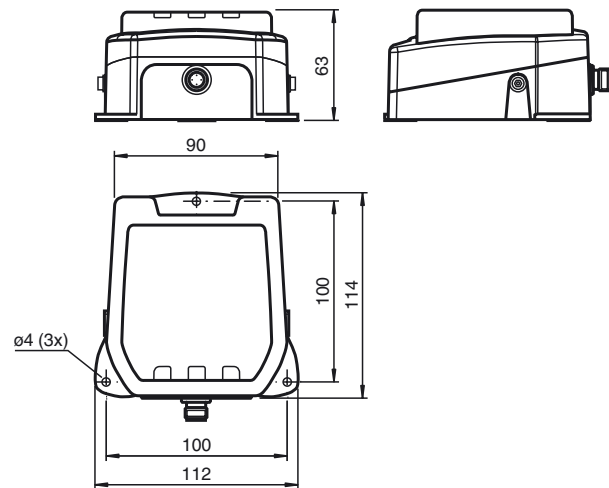

Electrical connection

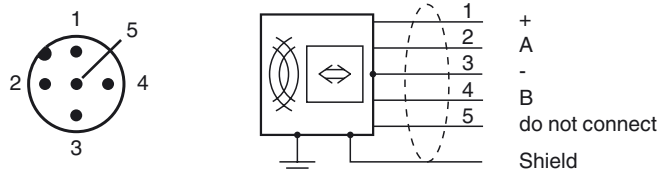

Technical data

General specifications

Operating frequency	902 ... 928 MHz
Emitted power	50 ... 500 mW EIRP adjustable
Operating distance	typ. 1 m
UL File Number	468231

Indicators/operating means

LED green	Power on
LED yellow	Read/write operation successful
LED blue	Transmission mode

Electrical specifications

Power consumption	P_0	≤ 7 W
Supply	from the IDENTControl	

Ambient conditions

Ambient temperature	-25 ... 70 °C (-13 ... 158 °F) (Operation with nontransmission periods, adjustable)
	-25 ... 50 °C (-13 ... 122 °F) (Continuous transmission mode)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)

Mechanical specifications

Degree of protection	IP67
Connection	M12 x 1 connector
Material	
Housing	PA 6
Base	diecast aluminum
Mass	approx. 900 g

Compliance with standards and directives

Standard conformity	
Electromagnetic compatibility	EN 301489-1 V1.9.2:2011 EN 301489-3 V1.4.1:2003
Safety	EN 60950-1:2006/A1:2010
Degree of protection	EN 60529:2000

Approvals and certificates

UL approval	UL 61010-1 3rd Edition CSA C22.2 NO. 61010-1-12 3rd Edition (EN 60950-, EN 60529 and IP67 are not included)
-------------	---

FCC approval

This device complies with part 15 of the FCC rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and
- (2) This device must accept any interference received, including interference that may cause undesired operation.

Caution:

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

IC approval

This device complies with Industry Canada licence-exempt RSS standard(s) and with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) this device may not cause interference, and
- (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes :

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Radio approval

USA: FCC IREIUH-F190-V1
Canada: IC 13-116260

Notes

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Function

The compact IUH-F190-V1-FR2-02 read/write head operates in the UHF frequency range and is optimized for use in industrial applications involving shorter distances. The device reads and writes passive tags according to EPC Generation 2 (ISO/IEC 18000-63). The read/write head can be operated in the USA, Canada and Mexico. The read/write head complies with the respective radio regulations.

Wide range of options supported for filtering data. The read/write head is connected to the IDENTControl interface using an M12 connector. The user can monitor the status of the read/write head using the integrated LEDs.

The read/write head has a typical detection range of approx. 1 meter; this range is determined by the tag used and can be changed by adjusting the transmission power. Other influencing factors are the application specific setup and surrounding materials, particularly metal. The read and write distances measured under ideal conditions can be found in a separate document. For the actual read and write distances under real conditions, the combination of read/write head and tag must be tested in the intended application.

Accessories**IUZ-MH12**

Mounting bracket for pole and wall mounting

V1-G-5M-PUR-ABG-V1-W

Connecting cable, M12 to M12, PUR cable 4-pin, shielded

V1-G-10M-PUR-ABG-V1-W

Connecting cable, M12 to M12, PUR cable 4-pin, shielded

IUC72-F152-M-FR2

Data carrier

IUC76-F157-M-FR2

Data carrier

IUC76-50-M-FR2

Data carrier

IUC76-50-FR2

Data carrier

IC-KP-B17-AIDA1

Control interface unit IDENTControl with Ethernet interface

IC-KP2-1HRX-2V1

Control interface unit IDENTControl Compact with serial interface

IC-KP2-2HRX-2V1

Control interface unit IDENTControl Compact with serial interface

IC-KP2-1HB6-V15B

Control interface unit IDENTControl Compact with interface for PROFIBUS DP

IC-KP2-1HB6-2V15B

Control interface unit IDENTControl Compact with interface for PROFIBUS DP

IC-KP2-2HB6-V15B

Control interface unit IDENTControl Compact with interface for PROFIBUS DP

IC-KP2-1HB17-2V1D

Control interface unit IDENTControl Compact with Ethernet interface

IC-KP2-2HB17-2V1D

Control interface unit IDENTControl Compact with Ethernet interface

IUC76-F203-M-FR2 10pcs

Data carrier

Release date: 2014-11-12 15:23 Date of issue: 2014-11-28 265719_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 4411
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com