



Features:

- Isolated output & GND for CH1,CH2
- Universal AC input / Full range
- Protections: Short circuit / Overload / Over voltage
- Cooling by free air convection
- LED indicator for power on
- 100% full load burn-in test
- All using 105[°]C long life electrolytic capacitors
- · Withstand 300VAC surge input for 5 second
- · Withstand 5G vibration test
- · High efficiency, long life and high reliability
- 3 years warranty








SPECIFICATION

	RID-85A		RID-85B	
OUTPUT NUMBER	CH1	CH2	CH1	CH2
DC VOLTAGE	5V	12V	5V	24V
RATED CURRENT	8A	4A	8A	2A
CURRENT RANGE Note.6	2 ~ 10A	0.3 ~ 5A	2 ~ 10A	0.3 ~ 2.5A
RATED POWER Note.6	88W		88W	
RIPPLE & NOISE (max.) Note.2	80mVp-p	120mVp-p	80mVp-p	120mVp-p
VOLTAGE ADJ. RANGE	CH1: 4.75 ~ 5.5V		CH1: 4.75 ~ 5.5V	
VOLTAGE TOLERANCE Note.3	±2.0%	±8.0%	±2.0%	±5.0%
LINE REGULATION Note.4	±0.5%	±1.0%	±0.5%	±1.0%
LOAD REGULATION Note.5	±1.0%	±3.0%	±1.0%	±5.0%
SETUP, RISE TIME	500ms, 20ms/230VAC 120	0ms, 30ms/115VAC at full load		
HOLD UP TIME (Typ.)	100ms/230VAC 18ms/115VAC at full load			
VOLTAGE RANGE	88 ~ 264VAC 125 ~ 373VDC (Withstand 300VAC surge for 5sec. Without damage)			
FREQUENCY RANGE	47 ~ 63Hz			
EFFICIENCY(Typ.)	80% 81%			
AC CURRENT (Typ.)	2.5A/115VAC 1.5A/230VAC			
INRUSH CURRENT (Typ.)	COLD START 40A/230VAC			
LEAKAGE CURRENT	<2mA/240VAC			
PROTECTION OVER VOLTAGE	110 ~ 150% rated output power			
	Protection type: Hiccup mode, recovers automatically after fault condition is removed			
	CH1: 5.75 ~ 6.75V			
	Protection type: Hiccup mode, recovers automatically after fault condition is removed			
WORKING TEMP.	-25 ~ +70°C (Refer to output load derating curve)			
WORKING HUMIDITY	20 ~ 90% RH non-condensing			
STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH			
TEMP. COEFFICIENT	$\pm 0.03\%$ /°C (0 ~ 50°C)on +5V output			
VIBRATION	10 ~ 500Hz, 5G 10min./1cycle, period for 60min. each along X, Y, Z axes			
SAFETY STANDARDS	UL60950-1, TUV EN60950-1 approved			
WITHSTAND VOLTAGE	I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC			
ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms/500VDC			
EMI CONDUCTION & RADIATION	Compliance to EN55022 (CISPR22) Class B			
HARMONIC CURRENT	Compliance to EN61000-3-2,-3			
EMS IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11; ENV50204, EN61000-6-2 (EN50082-2), heavy industry level, criteria A			
MTBF	239.4Khrs min. MIL-HDBK-217F (25°ℂ)			
DIMENSION	159*97*38mm (L*W*H)			
PACKING	0.6Kg; 24pcs/15.4Kg/0.7CUFT			
FOFFIL O O VVSTVSVIEFEND	RATED CURRENT CURRENT RANGE Note.6 RATED POWER Note.6 RATED POWER Note.6 RIPPLE & NOISE (max.) Note.2 VOLTAGE ADJ. RANGE VOLTAGE TOLERANCE Note.3 LINE REGULATION Note.5 SETUP, RISE TIME HOLD UP TIME (Typ.) VOLTAGE RANGE FREQUENCY RANGE EFFICIENCY (Typ.) AC CURRENT (Typ.) NRUSH CURRENT (Typ.) LEAKAGE CURRENT DVERLOAD DVER VOLTAGE WORKING TEMP. WORKING HUMIDITY STORAGE TEMP., HUMIDITY TEMP. COEFFICIENT VIBRATION SAFETY STANDARDS WITHSTAND VOLTAGE SOLATION RESISTANCE EMI CONDUCTION & RADIATION HARMONIC CURRENT EMS IMMUNITY WITBF DIMENSION	RATED CURRENT CURRENT RANGE Note.6 RATED POWER Note.6 RATED POWER Note.6 RIPPLE & NOISE (max.) Note.2 ROLTAGE ADJ. RANGE VOLTAGE TOLERANCE Note.3 LINE REGULATION Note.4 LOAD REGULATION LOAD REGULATION LOAD REGULATION ROLTAGE RANGE HOLD UP TIME (Typ.) VOLTAGE RANGE HOLD UP TIME (Typ.) VOLTAGE RANGE HOLD UP TIME (Typ.) REFICIENCY (Typ.) ROLTAGE RANGE FREQUENCY RANGE FREQUENCY RANGE LOAD START 40A/230VAC LEAKAGE CURRENT LOAD START 40A/230VAC LEAKAGE CURRENT CURRENT (Typ.) COLD START 40A/230VAC LEAKAGE CURRENT COLD START 40A/230VAC CH1: 5.75 ~ 6.75V Protection type: Hiccup mode, 1 The color of t	RATED CURRENT CURRENT RANGE Note.6 RATED POWER NOTE RANGE CH1: 4.75 ~ 5.5V VOLTAGE TOLERANCE Note.3 RATED ROW-p-p 120mvp-p 120m	December Sty

- 3. Tolerance : includes set up tolerance, line regulation and load regulation.
- 4. Line regulation is measured from low line to high line at rated load.
- 5. Load regulation is measured from 20% to 100% rated load, and other output at 60% rated load.
- 6. Each output can work within current range. But total output power can't exceed rated output power.
- 7. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets
- 8. Length of set up time is measured at cold first start. Turning ON/OFF the power supply very quickly may lead to increase of the set up time.

Chancerygate Business Centre, Cradock Road, Reading, Berkshire, RG2 0AH. Tel: 0118 931 1199 Fax: 0118 931 1145



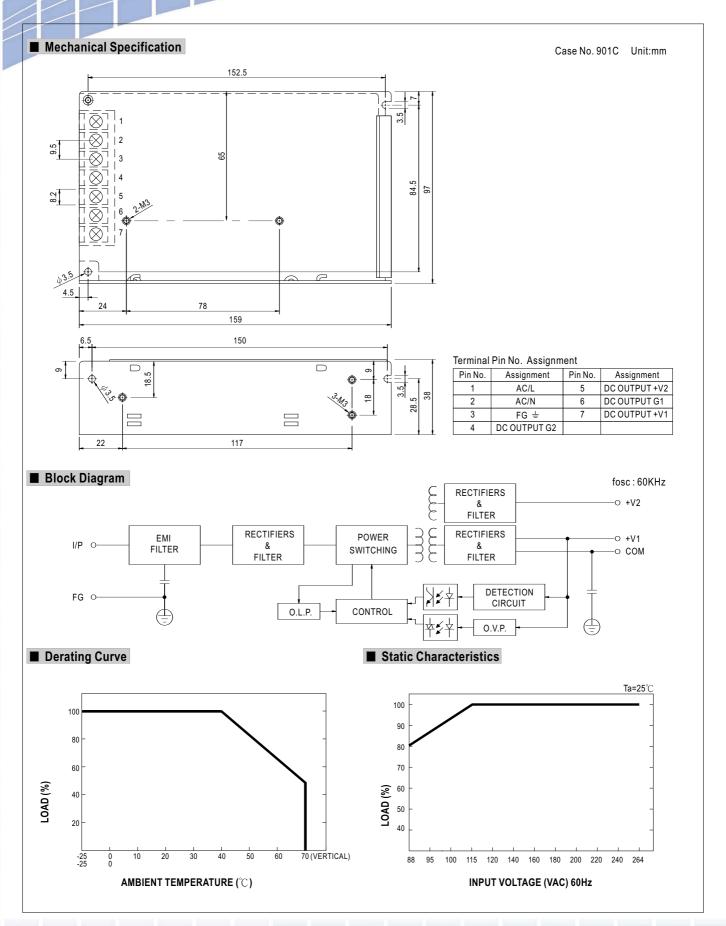

Chancerygate Business Centre, Cradock Road, Reading, Berkshire, RG2 0AH.
Tel: 0118 931 1199 Fax: 0118 931 1145

Email: info@stontronics.co.uk www.stontronics.co.uk