


Active FET Probe

P6205 Data Sheet

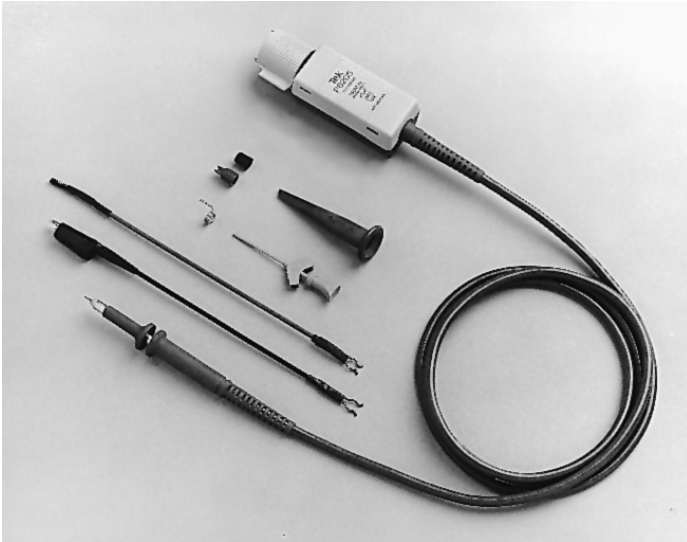

P6205 with Accessories.

Features & Benefits

P6205

- DC to 750 MHz
- 2 pF Input C
- 1 M Ω Input R
- Integral Probe Power TekProbe™ BNC

Applications

- High-speed Digital Systems Design
 - ECL
 - GaAs
 - MOS: CMOS; FastCMOS; BiCMOS; TTL
- Component Design/Characterization
 - Amplitude Levels
 - Aberrations
 - Propagation Delay and Timing
 - Bandwidths and Rise Times
- Educational Research
- Manufacturing Engineering and Test

Active FET Probes for TekProbe™ BNC Interface

The P6205 probe is part of Tektronix' line of Low Circuit Loading Signal Acquisition probes for CSA (Communications Signal Analyzers), DSA (Digitizing Signal Analyzers), 11000 Series and the TDS family of oscilloscopes.

The P6205 is designed with FET devices for its inputs, which allows very high input resistance values and low input capacitances.

Both Active FET probes provide a wide linear dynamic input range for accessing most digital device families using today's logic voltage levels.

Power for the P6205 is supplied by the CSA, DSA, TDS and 11000 Series mainframes through the TekProbe BNC Interface, eliminating the need for extra cabling and/or external power supplies.

Probe information such as type, serial number, attenuation factor, offset scale factor, input resistance, and termination resistance required is communicated through the TekProbe interface between the Active Probe and the CSA, DSA, and 11000 Series mainframes. This information is used by these oscilloscope mainframes during the scope initialization sequence and measurement analysis.

Benefit Highlights

- **Low Input C, High Input R** – Minimizes circuit under test loading
- **Probe Power Directly from CSA, DSA, TDS, or 11000 Series TekProbe™ BNC Interfaces** – Means no additional cables or power supplies required*1
- **Readout Coding for 10X Attenuation** – Reduces confusion and errors in measurement readings
- **Gold-plated Replaceable Probe Tips** – Improved electrical connections and lower maintenance costs
- **Miniature Size Accessories** – Provides wide range of circuit attachments
- **UL Listed** – UL 1244

*1 Interface/Readout/Identify Code: (TPB = TekProbe™ BNC) / (TPS = TekProbe™ SMA) / (BNC = CONVENTIONAL BNC) / (Y = Yes) / (N = No).

- ASEAN / Australasia (65) 6356 3900
- Austria 00800 2255 4835*
- Balkans, Israel, South Africa and other ISE Countries +41 52 675 3777
- Belgium 00800 2255 4835*
- Brazil +55 (11) 3759 7627
- Canada 1 800 833 9200
- Central East Europe and the Baltics +41 52 675 3777
- Central Europe & Greece +41 52 675 3777
- Denmark +45 80 88 1401
- Finland +41 52 675 3777
- France 00800 2255 4835*
- Germany 00800 2255 4835*
- Hong Kong 400 820 5835
- India 000 800 650 1835
- Italy 00800 2255 4835*
- Japan 81 (3) 6714 3010
- Luxembourg +41 52 675 3777
- Mexico, Central/South America & Caribbean 52 (55) 56 04 50 90
- Middle East, Asia, and North Africa +41 52 675 3777
- The Netherlands 00800 2255 4835*
- Norway 800 16098
- People's Republic of China 400 820 5835
- Poland +41 52 675 3777
- Portugal 80 08 12370
- Republic of Korea 001 800 8255 2835
- Russia & CIS +7 (495) 7484900
- South Africa +41 52 675 3777
- Spain 00800 2255 4835*
- Sweden 00800 2255 4835*
- Switzerland 00800 2255 4835*
- Taiwan 886 (2) 2722 9622
- United Kingdom & Ireland 00800 2255 4835*
- USA 1 800 833 9200

* European toll-free number. If not accessible, call: +41 52 675 3777

Updated 10 February 2011

Characteristics

P6205

Characteristic	Description
Nominal Cable Length in Meters	1.5
Attenuation	10X
Bandwidth at -3 dB in MHz	750
Input C in pF	2
Input R in Ω	1 M
Linear Dynamic Range in Volts	± 10
DC Offset Range in Volts	NA
Max Voltage in Volts (DC + pk AC)	± 40
Interface / Readout / Identify ^{*1}	TPB / Y / N
Recommended Instrument	11000* ² , TDS400, TDS500, TDS600, TDS700, TDS3000, TDS5000, TDS7000

*1 Interface/Readout/Identify Code: (TPB = TekProbe™ BNC) / (TPS = TekProbe™ SMA) / (BNC = CONVENTIONAL BNC) / (Y = Yes) / (N = No).

*2 11000 Series = 11A32/11A34/11A52/11A71/11A72/11A81

Ordering Information

P6205

10X, 750 MHz Active FET Probe.

Includes: Retractable hook tip (013-0107-07); 6 in. ground lead with alligator (196-3120-01); 6 in. ground lead with square-pin receptacle (196-3198-01); ground contact, spring (214-4125-00) SMT KlipChip™ adapter (206-0364-01); insulating ground cover (166-0404-01); IC test tip; carrying case; Instruction Manual (070-8202-01).

Recommended Accessories

Please see 5 mm Probe Accessories (miniature) probe system.

CE Marking Not Applicable.



Tektronix is registered to ISO 9001 and ISO 14001 by SRI Quality System Registrar.

For Further Information. Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit www.tektronix.com



Copyright © Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.

02 Oct 2011

60W-14842-1

