
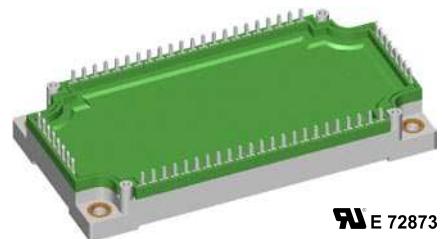


Converter - Brake - Inverter Module (CBI3) with Trench IGBT technology

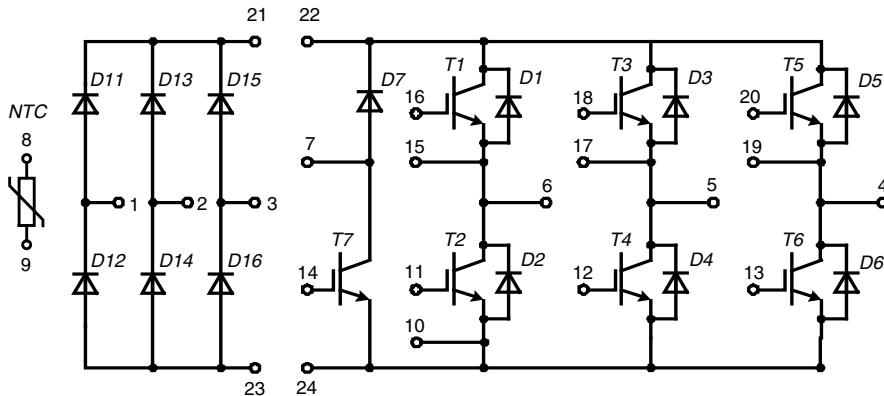

E 72873

Three Phase Rectifier	Brake Chopper	Three Phase Inverter
$V_{RRM} = 1600 \text{ V}$	$V_{CES} = 1200 \text{ V}$	$V_{CES} = 1200 \text{ V}$
$I_{FAVM} = 65 \text{ A}$	$I_{C25} = 55 \text{ A}$	$I_{C25} = 110 \text{ A}$
$I_{FSM} = 1100 \text{ A}$	$V_{CE(sat)} = 1.7 \text{ V}$	$V_{CE(sat)} = 1.7 \text{ V}$

Input Rectifier Bridge D11 - D16

Symbol	Conditions	Maximum Ratings		
V_{RRM}		1600		V
I_{FAV}	$T_c = 80^\circ\text{C}$; sine 180°	65		A
I_{DAVM}	$T_c = 80^\circ\text{C}$; rectangular; $d = 1/3$; bridge	180		A
I_{FSM}	$T_c = 25^\circ\text{C}$; $t = 10 \text{ ms}$; sine 50 Hz	1100		A
P_{tot}	$T_c = 25^\circ\text{C}$	155		W

Symbol Conditions

Characteristic Values

(T_{VJ} = 25°C, unless otherwise specified)

Symbol	Conditions		Characteristic Values		
			min.	typ.	max.
V_F	$I_F = 75 \text{ A}$; $T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$			1.15 1.05	1.3 V V
I_R	$V_R = V_{RRM}$; $T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$			0.05 0.8	mA mA
R_{thJC}	(per diode)			0.8	K/W

Application: AC motor drives with

- Input from single or three phase grid
- Three phase synchronous or asynchronous motor
- Electric braking operation

Features

- High level of integration - only one power semiconductor module required for the whole drive
- IGBT technology with low saturation voltage, low switching losses and tail current, high RBSOA and short circuit ruggedness
- Epitaxial free wheeling diodes with Hiperfast and soft reverse recovery
- Industry standard package with insulated copper base plate and soldering pins for PCB mounting
- Temperature sense included

Output Inverter T1 - T6

Symbol	Conditions	Maximum Ratings		
V_{CES}	$T_{VJ} = 25^\circ\text{C}$ to 150°C	1200		V
V_{GES}	Continuous	± 20		V
I_{C25}	$T_C = 25^\circ\text{C}$	110		A
I_{C80}	$T_C = 80^\circ\text{C}$	75		A
I_{CM}	$T_C = 80^\circ\text{C}; t_p = 1 \text{ ms}$	150		A
P_{tot}	$T_C = 25^\circ\text{C}$	355		W

Symbol Conditions Characteristic Values(T_{VJ} = 25°C, unless otherwise specified)

			min.	typ.	max.	
$V_{CE(sat)}$	$I_C = 75 \text{ A}; V_{GE} = 15 \text{ V}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$		1.7 2.0	2.15	V
$V_{GE(th)}$	$I_C = 3 \text{ mA}; V_{GE} = V_{CE}$		5	5.8	6.5	V
I_{CES}	$V_{CE} = V_{CES}; V_{GE} = 0 \text{ V}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$			4 1	mA mA
I_{GES}	$V_{CE} = 0 \text{ V}; V_{GE} = \pm 20 \text{ V}$				400	nA
C_{ies}	$V_{CE} = 25 \text{ V}; V_{GE} = 0 \text{ V}; f = 1 \text{ MHz}$			5.35		nF
Q_{Gon}	$V_{CE} = 600 \text{ V}; V_{GE} = 15 \text{ V}; I_C = 75 \text{ A}$			700		nC
$t_{d(on)}$ t_r $t_{d(off)}$ t_f E_{on} E_{off}	Inductive load, $T_{VJ} = 125^\circ\text{C}$ $V_{CE} = 600 \text{ V}; I_C = 75 \text{ A}$ $V_{GE} = \pm 15 \text{ V}; R_G = 4.7 \Omega$			290 50 520 90 7 9.5		ns ns ns ns mJ mJ
RBSOA		$V_{CEK} \leq V_{CES} - L_S \frac{di}{dt}$				V
$R_G = 4.7 \Omega; T_{VJ} = 125^\circ\text{C}$						
t_{sc} (SCSOA)		$V_{CE} = 720 \text{ V}; V_{GE} = \pm 15 \text{ V}; R_G = 4.7 \Omega$ $t_p \leq 10 \mu\text{s}; \text{non-repetitive}; T_{VJ} = 125^\circ\text{C}$		300		A
R_{thJC}					0.35	K/W

Output Inverter D1 - D6

Symbol	Conditions	Maximum Ratings		
I_{F25}	$T_C = 25^\circ\text{C}$	155		A
I_{F80}	$T_C = 80^\circ\text{C}$	75		A

Symbol Conditions Characteristic Values

			min.	typ.	max.	
V_F	$I_F = 75 \text{ A}; T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$			2.1 1.6	2.6	V
I_{RM} Q_{rr} t_{rr} E_{rec}	$I_F = 75 \text{ A}; di_F/dt = -1500 \text{ A}/\mu\text{s};$ $T_{VJ} = 125^\circ\text{C}; V_R = 600 \text{ V}; V_{GE} = 0 \text{ V}$			135 15 160 6		A μC ns mJ
R_{thJC}		(per diode)			0.4	K/W

Brake Chopper T7

Symbol	Conditions	Maximum Ratings		
V_{CES}	$T_{VJ} = 25^\circ\text{C}$ to 150°C	1200		V
V_{GES}	Continuous	± 20		V
I_{C25}	$T_C = 25^\circ\text{C}$	55		A
I_{C80}	$T_C = 80^\circ\text{C}$	35		A
I_{CM}	$T_C = 80^\circ\text{C}; t_p = 1 \text{ ms}$	70		A
P_{tot}	$T_C = 25^\circ\text{C}$	200		W

Symbol Conditions Characteristic Values(T_{VJ} = 25°C, unless otherwise specified)

			min.	typ.	max.	
$V_{CE(\text{sat})}$	$I_C = 35 \text{ A}; V_{GE} = 15 \text{ V}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$		1.7 2.0	2.15	V
$V_{GE(\text{th})}$	$I_C = 1.5 \text{ mA}; V_{GE} = V_{CE}$		5	5.8	6.5	V
I_{CES}	$V_{CE} = V_{CES}; V_{GE} = 0 \text{ V}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$			0.25 0.3	mA mA
I_{GES}	$V_{CE} = 0 \text{ V}; V_{GE} = \pm 20 \text{ V}$				400	nA
C_{ies}	$V_{CE} = 25 \text{ V}; V_{GE} = 0 \text{ V}; f = 1 \text{ MHz}$			2.5		nF
Q_{Gon}	$V_{CE} = 600 \text{ V}; V_{GE} = 15 \text{ V}; I_C = 35 \text{ A}$			330		nC
$t_{d(on)}$ t_r $t_{d(off)}$ t_f E_{off}	Inductive load, $T_{VJ} = 125^\circ\text{C}$ $V_{CE} = 600 \text{ V}; I_C = 35 \text{ A}$ $V_{GE} = \pm 15 \text{ V}; R_G = 27 \Omega$			90 50 520 90 4.8		ns ns ns ns mJ
RBSOA		$I_C = I_{CM}; V_{GE} = 15 \text{ V}$ $R_G = 27 \Omega; T_{VJ} = 125^\circ\text{C}$	$V_{CEK} \leq V_{CES} - L_S \frac{di}{dt}$			V
t_{sc} (SCSOA)		$V_{CE} = 720 \text{ V}; V_{GE} = \pm 15 \text{ V}; R_G = 27 \Omega$ $t_p \leq 10 \mu\text{s}; \text{non-repetitive}; T_{VJ} = 125^\circ\text{C}$		140		A
R_{thJC}					0.62	K/W

Brake Chopper D7

Symbol	Conditions	Maximum Ratings		
V_{RRM}	$T_{VJ} = 25^\circ\text{C}$ to 150°C	1200		V
I_{F25}	$T_C = 25^\circ\text{C}$	50		A
I_{F80}	$T_C = 80^\circ\text{C}$	30		A

Symbol Conditions Characteristic Values

			min.	typ.	max.	
V_F	$I_F = 35 \text{ A}; T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$			2.5 2.0	3.3	V
I_R	$V_R = V_{RRM}; T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$				0.25 0.5	mA mA
R_{thJC}	(per diode)				1.2	K/W

Temperature Sensor NTC

Symbol	Conditions	Characteristic Values		
		min.	typ.	max.
R_{25}	$T = 25^\circ\text{C}$	4.75	5.0	5.25
$B_{25/50}$			3375	$\text{k}\Omega$ K


Module

Symbol	Conditions	Maximum Ratings		
T_{VJ}	operating	-40...+125	$^\circ\text{C}$	
T_{JM}		+150	$^\circ\text{C}$	
T_{stg}		-40...+125	$^\circ\text{C}$	
V_{ISO}	$I_{ISOL} \leq 1 \text{ mA}; 50/60 \text{ Hz}$	2500	V~	
M_d	Mounting torque (M5)	3 - 6	Nm	

Symbol Conditions

Symbol	Conditions	Characteristic Values		
		min.	typ.	max.
$R_{therm-chip}$	Resistance terminal to chip		5	$\text{m}\Omega$
d_s	Creepage distance on surface	6		mm
d_A	Strike distance in air	6		mm
R_{thCH}	with heatsink compound		0.01	K/W
Weight			300	g

Dimensions in mm (1 mm = 0.0394")

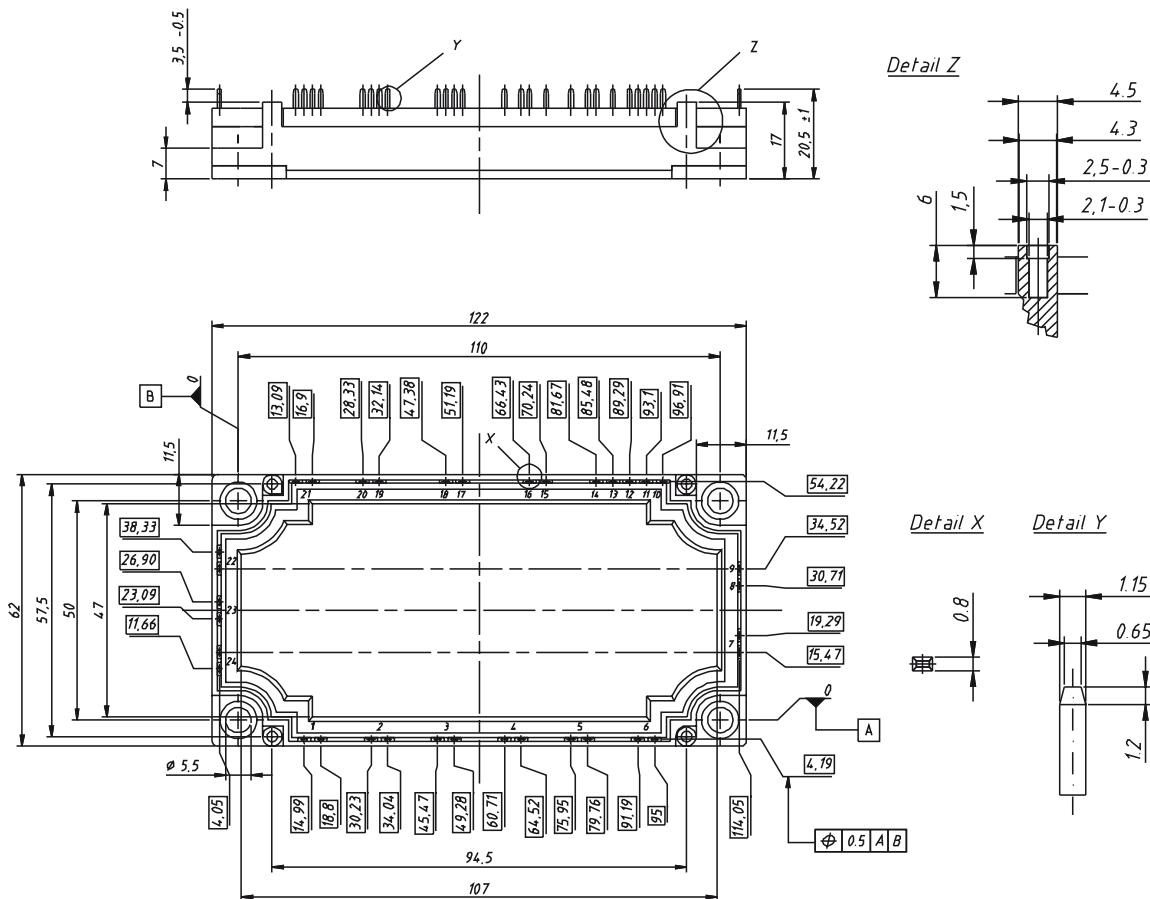

IXYS reserves the right to change limits, test conditions and dimensions.

© 2006 IXYS All rights reserved

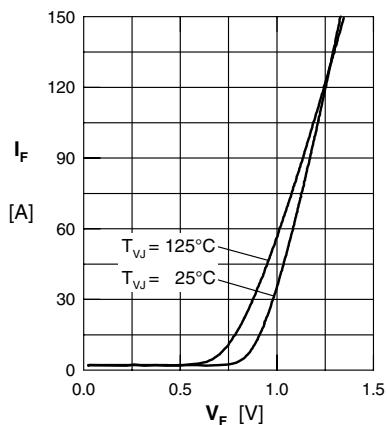
Input Rectifier Bridge D11 - D16

Fig. 1 Typ. forward current vs.
voltage drop per diode

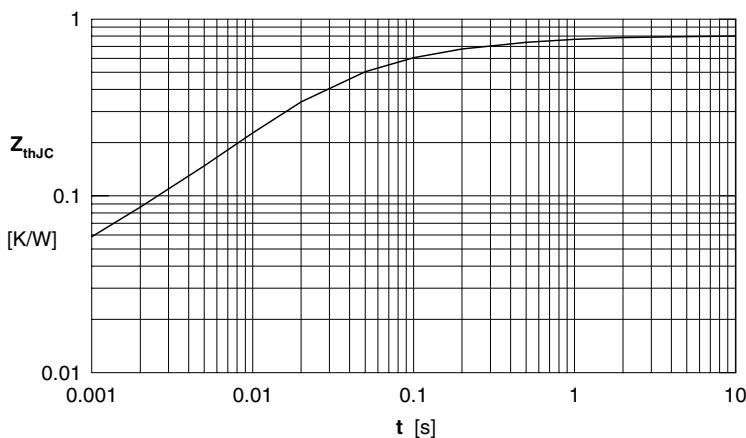


Fig. 2 Transient thermal impedance junction to case

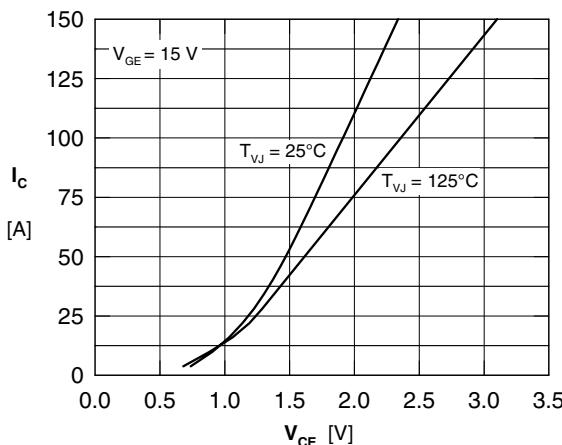
Output Inverter T1 - T6 / D1 - D6


Fig. 3 Typical output characteristic

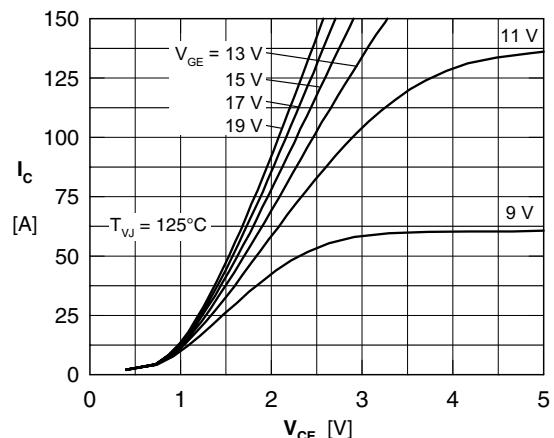


Fig. 4 Typical output characteristic

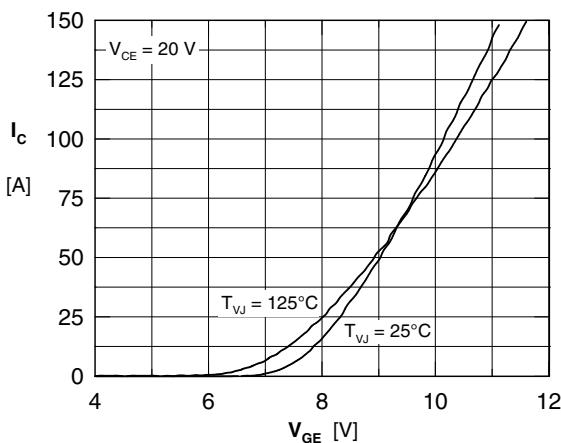


Fig. 5 Typical transfer characteristic

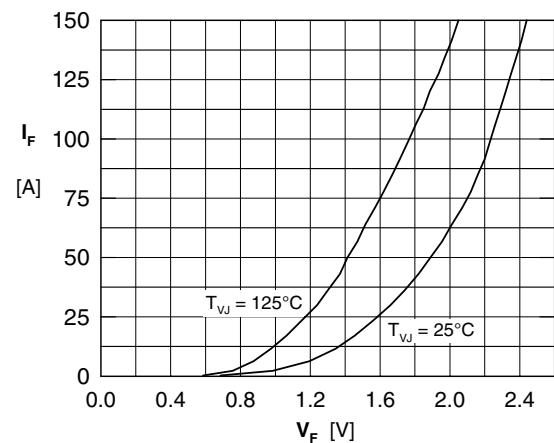


Fig. 6 Typical forward characteristic of free wheeling diode

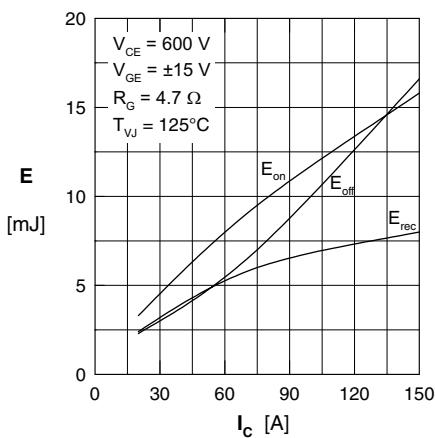


Fig. 7 Typical switching losses vs. collector current

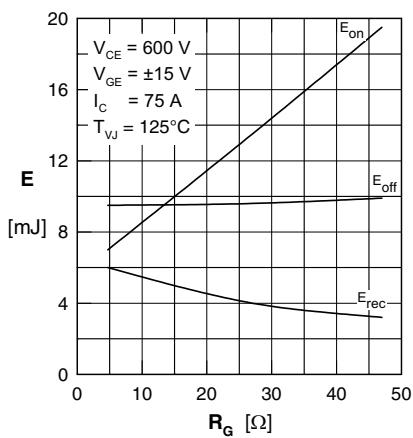


Fig. 8 Typ. switching losses vs. gate resistance

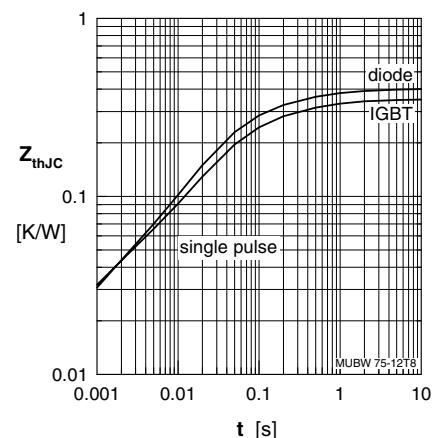


Fig. 9 Transient thermal impedance

IXYS reserves the right to change limits, test conditions and dimensions.

© 2006 IXYS All rights reserved

0646

6 - 7

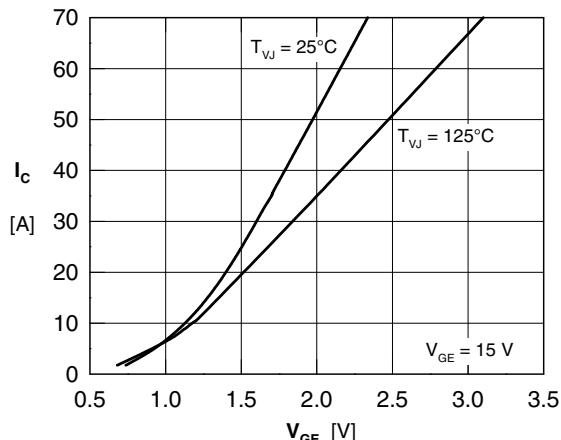
Brake Chopper T7 / D7


Fig. 10 Typical output characteristics

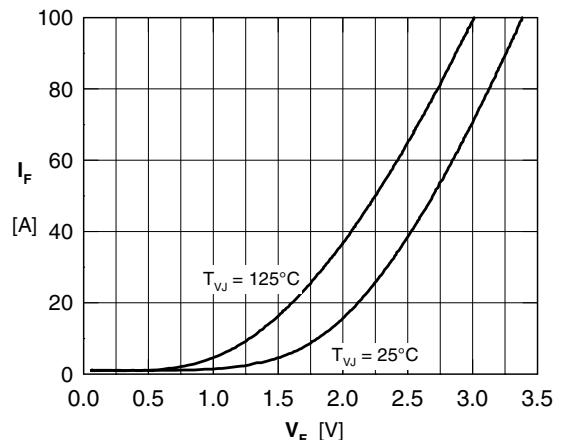


Fig. 11 Typical forward characteristics of free wheeling diode

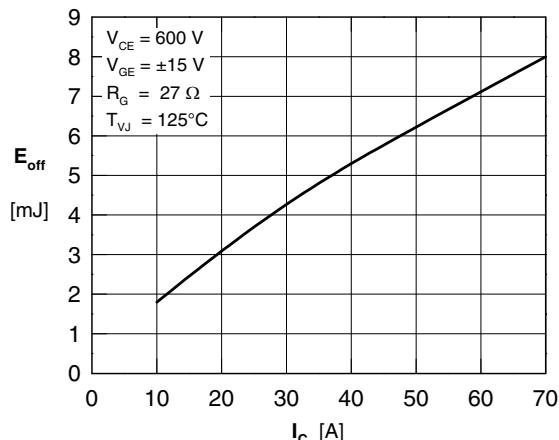


Fig. 12 Typ. turn off energy vs. collector current

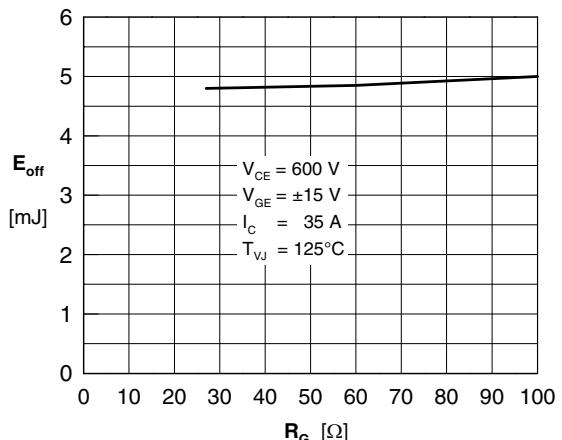


Fig. 13 Typ. turn off energy vs. gate resistor

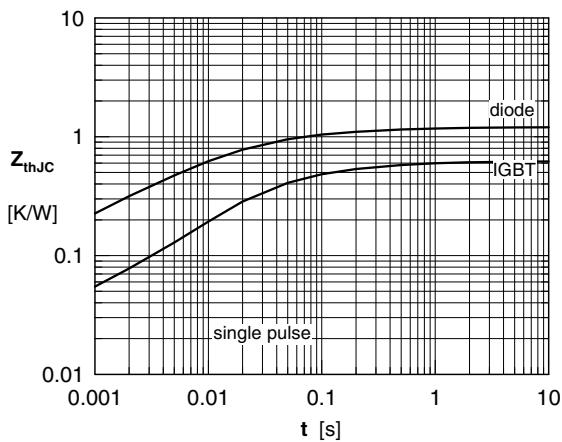


Fig. 14 Transient thermal impedance

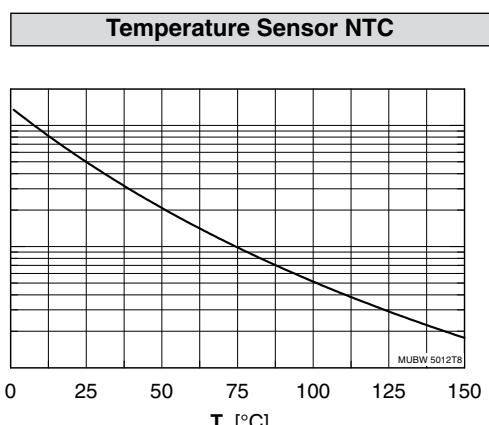


Fig. 15 Typ. termistor resistance versus temperature