

# RadHard-by-Design

## RHD5931 Digital-to-Analog Converter

### 11-Bit Buffered Output

www.aeroflex.com/RHDseries


May 15, 2012



**AEROFLEX**  
A passion for performance.

#### FEATURES

- Radiation performance
  - Total dose: >1 Mrad(Si), Dose rate = 50 - 300 rads(Si)/s
  - ELDRS Immune
  - SEL Immune: >100 MeV-cm<sup>2</sup>/mg
  - Neutron Displacement Damage: >10<sup>14</sup> neutrons/cm<sup>2</sup>
- 11-Bit DAC
- Buffered Output
- Single power supply operation at +3.3V to +5V
- Low Power
- Full 4-quadrant multiplying DAC
- CMOS/TTL inputs
- Full military temperature range
- Designed for aerospace and high reliability space applications
- Packaging – Hermetic ceramic SOIC
  - 16 leads, 0.411"L x 0.293"W x 0.090"Ht
  - Typical Weight 0.8 grams

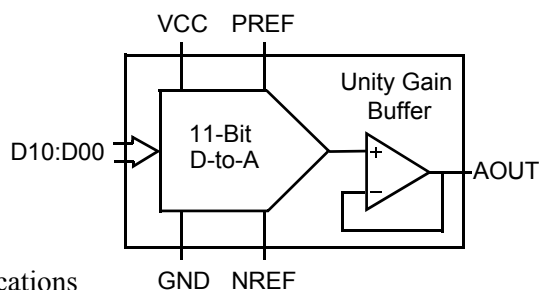

#### SCHEMATIC SYMBOL

- Aeroflex Plainview's Radiation Hardness Assurance Plan is DLA Certified to MIL-PRF-38534, Appendix G.

#### GENERAL DESCRIPTION

The Aeroflex 11-Bit DAC is a standard CMOS R/2R Kelvin resistor network with a buffered output. The digital inputs, D10(MSB) through D00(LSB), are buffered to drive single-pole double-throw CMOS switches to apply either the PREF or NREF signals to the 2R legs of the resistor network.

PREF and NREF inputs can be any static or dynamic voltage within the power supply range. The nominal values for R and 2R are 5K and 10K respectively. The characteristic impedance of the resistor network is approximately 5K.

The voltage-output configuration of the integrated circuit can be thought of as a digitally controlled voltage with a value of PREF-NREF with a high output impedance. The output will swing rail-to-rail if unloaded.

Applications include digital potentiometers, programmable voltage sources and a large variety of other circuits that can be found in many industry references.

## ABSOLUTE MAXIMUM RATINGS

Parameter	Range	Units
Case Operating Temperature Range	-55 to +125	°C
Storage Temperature Range	-65 to +150	°C
Junction Temperature	+150	°C
Lead Temperature (soldering, 10 seconds)	300	°C
Thermal Resistance, Junction to Case, $\theta_{jc}$	10	°C/W
Supply Voltage +VCC	+6.0	V
PREF relative to NREF	+6.0	V
Digital Input Voltage	VCC +0.4 GND -0.4	V
ESD Rating	2.0	KV
Power @25°C	200	mW

NOTICE: Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress rating only; functional operation beyond the "Operation Conditions" is not recommended and extended exposure beyond the "Operation Conditions" may affect device reliability.

## RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Typical	Units
+VCC	Power Supply Voltage	3.3 to 5.0	V

## ELECTRICAL PERFORMANCE CHARACTERISTICS 1/ (Tc = -55°C to +125°C, +Vcc = +5.0V -- Unless otherwise specified)


Parameter	Symbol	Conditions	Min	Typ	Max	Units
Supply Current	ICC				5	mA
Resolution	N				11	Bits
Relative Accuracy	RA				0.25	% of FSR
Gain Error	AE				0.1	% of FSR
Output Leakage <u>2/</u>	IOL				N/A	nA
Output Settling Time	TD				2	us
PREF Input Z <u>2/</u>	ZP				5K	$\Omega$
NREF Input Z <u>2/</u>	ZR				5K	$\Omega$
Input Hi Voltage	VIH		70% VCC			V
Input Lo Voltage	VIL				30% VCC	V
Input Leakage <u>2/</u>	IIL, IIH				100	pA

Note: 1/ Specification derated to reflect Total Dose exposure to 1 Mrad(Si) @ +25°C.


2/ Not Tested. Shall be guaranteed by design, characterization, or correlation to other test parameters.

## ORDERING INFORMATION

Model	DLA SMD #	Screening	Package
RHD5931-7	-	Commercial Flow, +25°C testing only	16-pin SOIC Package
RHD5931-S	-	Military Temperature, -55°C to +125°C Screened in accordance with the individual Test Methods of MIL-STD-883 for Space Applications	
RHD5931-201-1S	5962-1120802KXC	DLA SMD Pending	
RHD5931-201-2S	5962-1120802KXA		
RHD5931-901-1S	5962H1120802KXC	DLA SMD and Radiation Certification Pending	
RHD5931-901-2S	5962H1120802KXA		

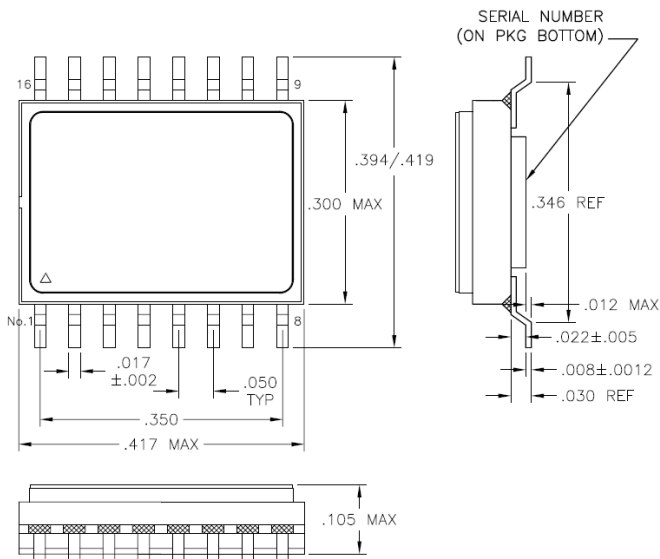

**PACKAGE OUTLINE**

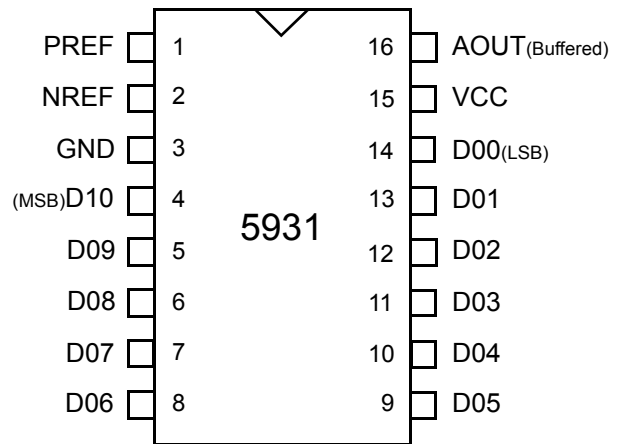

**PACKAGE PINOUT**

**EXPORT CONTROL:**

*This product is controlled for export under the International Traffic in Arms Regulations (ITAR). A license from the U.S. Department of State is required prior to the export of this product from the United States.*

**EXPORT WARNING:**

*Aeroflex's military and space products are controlled for export under the International Traffic in Arms Regulations (ITAR) and may not be sold or proposed or offered for sale to certain countries. (See ITAR 126.1 for complete information.)*

**PLAINVIEW, NEW YORK**  
Toll Free: 800-THE-1553  
Fax: 516-694-6715

**INTERNATIONAL**  
Tel: 805-778-9229  
Fax: 805-778-1980

**NORTHEAST**  
Tel: 603-888-3975  
Fax: 603-888-4585

**SE AND MID-ATLANTIC**  
Tel: 321-951-4164  
Fax: 321-951-4254

**WEST COAST**  
Tel: 949-362-2260  
Fax: 949-362-2266

**CENTRAL**  
Tel: 719-594-8017  
Fax: 719-594-8468

[www.aeroflex.com](http://www.aeroflex.com)    [info-ams@eroflex.com](mailto:info-ams@eroflex.com)



Aeroflex Microelectronic Solutions reserves the right to change at any time without notice the specifications, design, function, or form of its products described herein. All parameters must be validated for each customer's application by engineering. No liability is assumed as a result of use of this product. No patent licenses are implied.



Our passion for performance is defined by three attributes represented by these three icons: solution-minded, performance-driven and customer-focused