

# RadHard-by-Design RHD5912 Quad Comparator Open Drain Outputs

[www.aeroflex.com/RHDseries](http://www.aeroflex.com/RHDseries)

May 21, 2012



## FEATURES

- Single power supply operation at 3.3V or 5.0V
- Radiation performance
  - Total dose:  $> 1 \text{ Mrad(Si)}$ ; Dose rate = 50 - 300 rads(Si)/s
  - ELDRS Immune
  - SEL Immune  $> 100 \text{ MeV-cm}^2/\text{mg}$
  - Neutron Displacement Damage  $> 10^{14} \text{ neutrons/cm}^2$
- Short Circuit Tolerant
- Full military temperature range
- Designed for aerospace and high reliability space applications
- Packaging – Hermetic ceramic SOIC
  - 16-pin, .411"L x .293"W x .090"Ht
  - Weight - 0.8 grams max
- **Aeroflex Plainview's Radiation Hardness Assurance Plan is DLA Certified to MIL-PRF-38534, Appendix G.**

## GENERAL DESCRIPTION

Aeroflex's RHD5912 is a radiation hardened, single supply, quad comparator with open drain outputs in a 16-pin SOIC package. The RHD5912 design uses specific circuit topology and layout methods to mitigate total ionizing dose effects and single event latchup. These characteristics make the RHD5912 especially suited for the harsh environment encountered in Deep Space missions. It is guaranteed operational from  $-55^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ . Available screened in accordance with MIL-PRF-38534 Class K, the RHD5912 is ideal for demanding military and space applications.



## ORGANIZATION AND APPLICATION

The RHD5912 quad comparator is intended for operation with dynamic signals on either or both inputs. Comparison is 'continuous', that is, the circuit functions as high gain open loop amplifiers with a digital output. For slow input signals with small input differences the comparators can be expected to respond to small noise signals at the inputs. Although there is internal hysteresis, feedback hysteresis is the responsibility of the user to avoid 'chattering' on system noise.

The comparator will accept signals anywhere in the included power supply range. The circuit delay is specified for a half-volt single ended or differential input step of either polarity ending in an input polarity reversal of 10mV. See Switching Diagrams.

CMOS device drive has a negative temperature coefficient and the devices are therefore inherently tolerant to momentary shorts, although on chip thermal shutdown is not provided. All inputs and outputs are diode protected

The devices will not latch with SEU events above  $100 \text{ Mev-cm}^2/\text{mg}$ . Total dose degradation is minimal to above  $1 \text{ Mrad(Si)}$ . Displacement damage environments to neutron fluence equivalents in the mid  $10^{14}$  neutrons per  $\text{cm}^2$  range are readily tolerated. There is no sensitivity to low-dose rate (ELDRS) effects. SEU effects are application dependant.

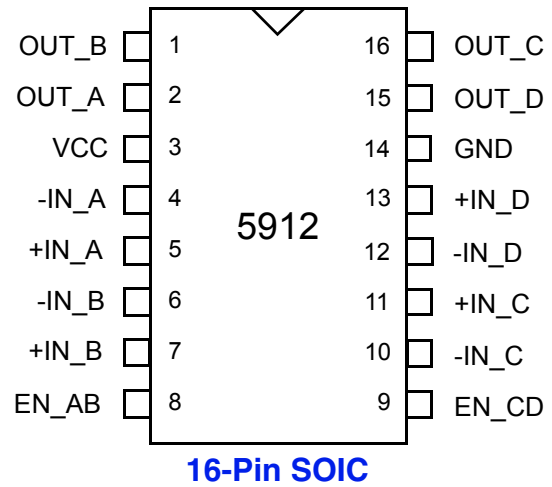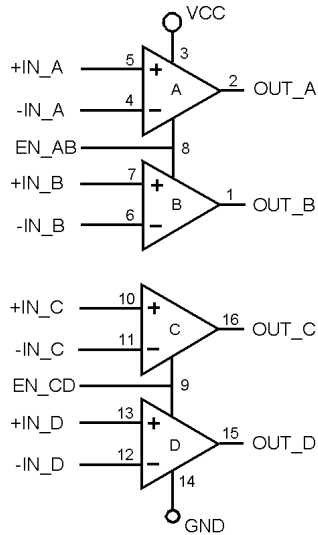

## BLOCK DIAGRAM

## PACKAGE PIN-OUT

### Notes:

1. Package and Lid are electrically isolated from signal pads.
2. It is recommended that the Lid be grounded to prevent any ESD or static buildup.
3. EN\_AB enables Comparators A & B. EN\_CD enables Comparators C & D.

Pin	Signal Name	Definition
1	OUT_B	Output of Comparator B.
2	OUT_A	Output of Comparator A.
3	VCC	DC Supply Voltage.
4	-IN_A	Inverting input of Comparator A.
5	+IN_A	Non-Inverting input of Comparator A.
6	-IN_B	Inverting input of Comparator B.
7	+IN_B	Non-Inverting input of Comparator B.
8	EN_AB	A Logic Low will disable Comparator A & B so that the outputs are high impedance.
9	EN_CD	A Logic Low will disable Comparator C & D so that the outputs are high impedance.
10	-IN_C	Inverting input of Comparator C.
11	+IN_C	Non-Inverting input of Comparator C.
12	-IN_D	Inverting input of Comparator D.
13	+IN_D	Non-Inverting input of Comparator D.
14	GND	DC Supply Return.
15	OUT_D	Output of Comparator D.
16	OUT_C	Output of Comparator C.

## PIN-OUT DESCRIPTION

## ABSOLUTE MAXIMUM RATINGS

Parameter	Range	Units
Case Operating Temperature Range	-55 to +125	°C
Storage Temperature Range	-65 to +150	°C
Junction Temperature	+150	°C
Supply Voltage +V <sub>CC</sub>	+6.0	V
Input Voltage	V <sub>CC</sub> +0.4 GND -0.4	V V
Lead Temperature (soldering, 10 seconds)	300	°C
ESD Rating	2.0	KV
Power @ 25°C	250	mW

NOTICE: Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress rating only; functional operation beyond the "Operation Conditions" is not recommended and extended exposure beyond the "Operation Conditions" may affect device reliability.

## RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Typical	Units
+V <sub>CC</sub>	Power Supply Voltage	3.3 to 5.0	V
V <sub>CM</sub>	Input Common Mode Range	V <sub>CC</sub> to GND	V

## ELECTRICAL PERFORMANCE CHARACTERISTICS

(T<sub>C</sub> = -55°C TO +125°C, +V<sub>CC</sub> = +5.0V -- UNLESS OTHERWISE SPECIFIED)

Parameter	Symbol	Conditions	Min	Max	Units
Input Offset Voltage <u>1/</u>	V <sub>OS</sub>		-2	2	mV
Input Offset Current <u>2/</u>	I <sub>OS</sub>	T <sub>C</sub> = +25°C, -55°C	-100	100	pA
		T <sub>C</sub> = +125°C	-500	500	
Input Bias Current <u>2/</u>	I <sub>B</sub>	T <sub>C</sub> = +25°C, -55°C	-100	100	pA
		T <sub>C</sub> = +125°C	-1000	1000	
Input Offset TempCo <u>2/</u>	V <sub>I<sub>OS</sub>T</sub>			10	μV/C
Common Mode Rejection Ratio <u>1/</u>	CMRR		70		dB
Power Supply Rejection Ratio <u>1/</u>	PSRR		70		dB
Output Voltage High <u>1/</u>	V <sub>OH</sub>	I <sub>OUT</sub> = 5mA	4.9		V
Output Voltage Low <u>1/</u>	V <sub>OL</sub>	I <sub>OUT</sub> = 5mA		0.1	V
Gain <u>2/</u>	A		5		V/mV
Input Voltage - Enable (EN_AB, EN_CD)	V <sub>HI</sub>	High (Enabled)	70%V <sub>CC</sub>		V
	V <sub>LO</sub>	Low (Disabled)		30%V <sub>CC</sub>	V
Input Current - Enable (EN_AB, EN_CD)	I <sub>EN</sub>			100	nA
Quiescent Supply Current <u>1/</u>	I <sub>CCQ</sub>			7	mA

Notes: 1/ Specification derated to reflect Total Dose exposure to 1 Mrad(Si) @ 25°C.

2/ Not tested. Shall be guaranteed by design, characterization or correlation to other test parameters.



## SWITCHING CHARACTERISTICS

(Tc = -55°C TO +125°C, +Vcc = +5.0V -- UNLESS OTHERWISE SPECIFIED)

Parameter	Symbol	Conditions	Min	Max	Units
Output Delay (Switching)	TOUT	1/		25	ns
Output Delay (Enabled)	t <sub>ONEN</sub>			100	ns
Output Delay (Disabled)	t <sub>OFFEN</sub>			100	ns

Note:

1/ The circuit delay is specified for a half-volt single ended or differential input step, of either polarity, ending in an input polarity reversal of 10mV.

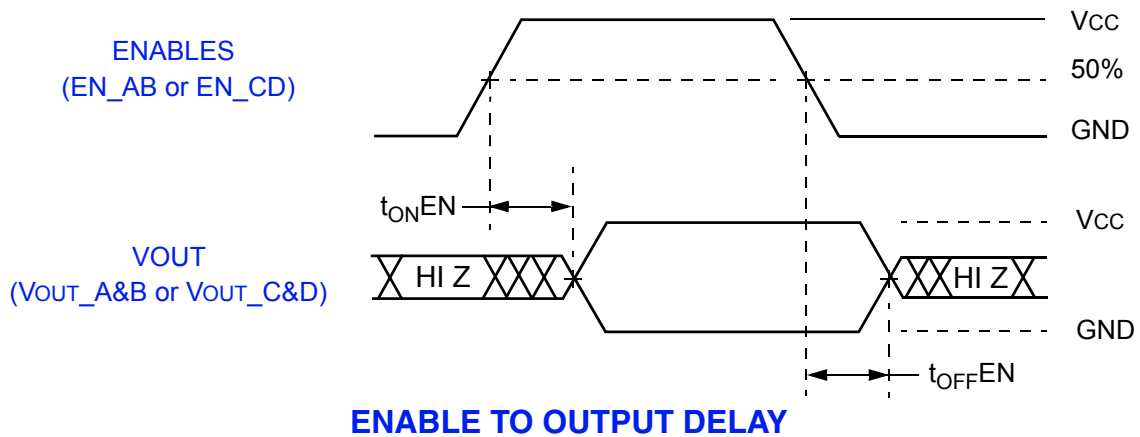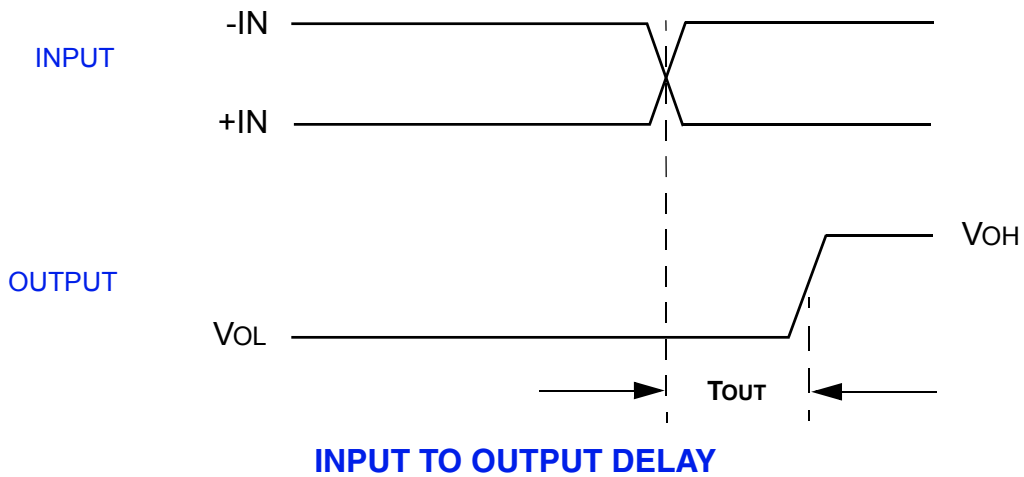


## RHD5912 SWITCHING DIAGRAMS

**Threshold Voltage**


$$V_{TH} = V_{CC} \frac{R2}{R1 + R2}$$

**Hysteresis Calculation**

$$HYS = V_O \frac{R2}{R2 + R3}$$

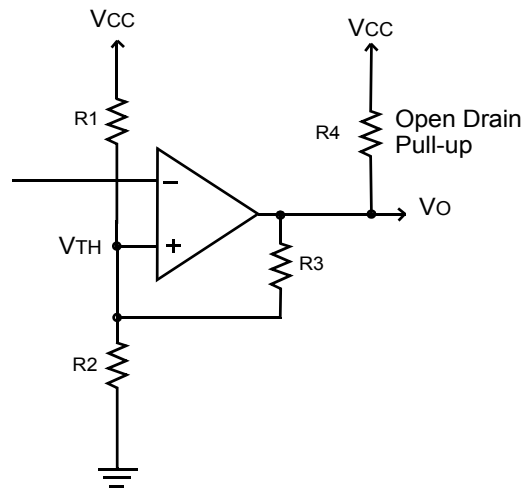

**APPLICATION NOTE 1: HYSTERESIS**

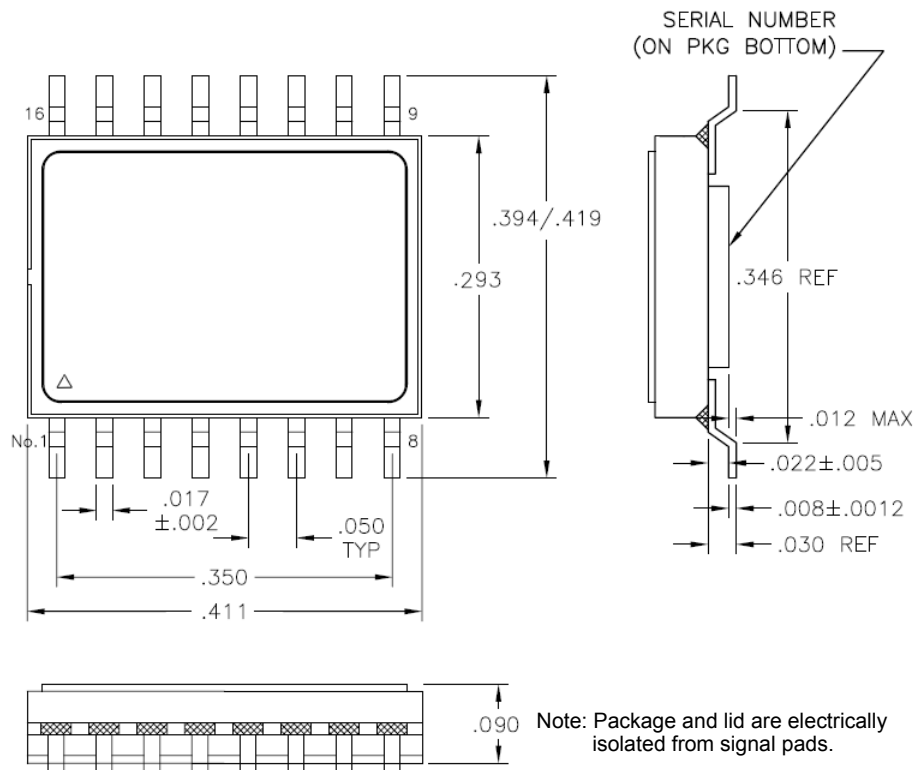

**PACKAGE OUTLINE**

## ORDERING INFORMATION

Model	DSCC SMD #	Screening	Package
RHD5912-7	-	Commercial Flow, +25°C testing only	16-pin SOIC Package
RHD5912-S	-	Military Temperature, -55°C to +125°C Screened in accordance with the individual Test Methods of MIL-STD-883 for Space Applications	
RHD5912-201-1S	5962-1024203KXC	DSCC SMD Pending	
RHD5912-201-2S	5962-1024203KXA		
RHD5912-901-1S	5962H1024203KXC	DSCC SMD and Radiation Certification Pending	
RHD5912-901-2S	5962H1024203KXA		

**EXPORT CONTROL:**

*This product is controlled for export under the International Traffic in Arms Regulations (ITAR). A license from the U.S. Department of State is required prior to the export of this product from the United States.*

**EXPORT WARNING:**

*Aeroflex's military and space products are controlled for export under the International Traffic in Arms Regulations (ITAR) and may not be sold or proposed or offered for sale to certain countries. (See ITAR 126.1 for complete information.)*

**PLAINVIEW, NEW YORK**

Toll Free: 800-THE-1553  
Fax: 516-694-6715

**INTERNATIONAL**

Tel: 805-778-9229  
Fax: 805-778-1980

**NORTHEAST**

Tel: 603-888-3975  
Fax: 603-888-4585

**SE AND MID-ATLANTIC**

Tel: 321-951-4164  
Fax: 321-951-4254

**WEST COAST**

Tel: 949-362-2260  
Fax: 949-362-2266

**CENTRAL**

Tel: 719-594-8017  
Fax: 719-594-8468

[www.aeroflex.com](http://www.aeroflex.com)    [info-ams@aeroflex.com](mailto:info-ams@aeroflex.com)



Aeroflex Microelectronic Solutions reserves the right to change at any time without notice the specifications, design, function, or form of its products described herein. All parameters must be validated for each customer's application by engineering. No liability is assumed as a result of use of this product. No patent licenses are implied.



Our passion for performance is defined by three attributes represented by these three icons: solution-minded, performance-driven and customer-focused