

Technical Data Sheet

Luminosity white Color LED

59-146UTD/TR8

Features

- Super luminosity white LED.
- Built in 4 LED chips.
- Wide viewing angle.
- Soldering methods: Reflow soldering.
- High performance.
- Package in 12mm tape on 7" diameter reel.
- Pb-free.
- The product itself will remain within RoHS compliant version.




- The 59-146 SMD LED is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications. etc.



- Amusement equipment.
- Information boards.
- Flashlight for digital camera of cellular phone.
- Lighting for small size device.


Device Selection Guide

Chip			
Material	Emitted Color	Resin Color	
InGaN	White	Yellow diffused	



Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1.1 Page: 1 of 10

Package Outline Dimensions

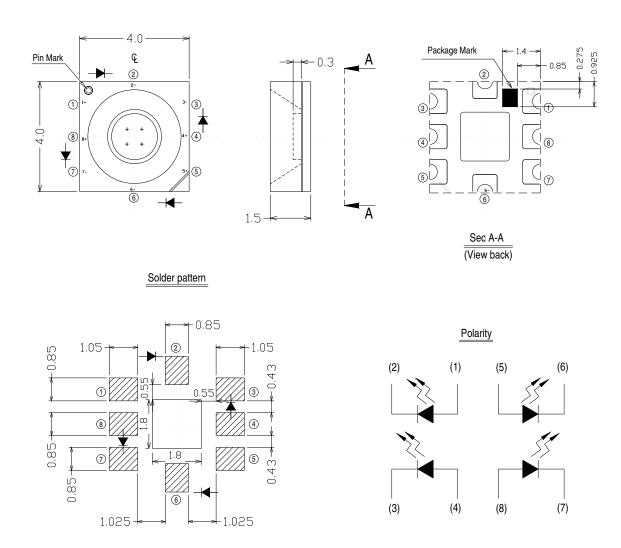

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd.

Device No.:DES-596

http://www.everlight.com

Rev. 1.1

Page: 2 of 10

Prepared date: 03-Apr-2007

Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Reverse Voltage	V_R	5	V
Forward Current	IF	30	mA
Peak Forward Current (Duty 1/10 @ 400ms)	Ifp	100	mA
Power Dissipation	Pd	110	mW
Electrostatic Discharge(HBM)	ESD	1000	V
Electrostatic Discharge (CDM)	ESD	500	V
Operating Temperature	Topr	-40 ~ +85	$^{\circ}$
Storage Temperature	Tstg	-40 ~ +90	$^{\circ}$
Soldering Temperature	Tsol		: 260 °C for 10 sec. : 350 °C for 3 sec.

^{*} The value are base d on the 1-die performance.

Electro-Optical Characteristics (Ta=25°C)

need o-Optical Characteristics (1a-25 C)						
Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
		5.0	8.5	15.0		$I_F=20mA*2$
Luminous Intensity*1	Iv	10.0	25.0	45.0	cd	I _{FP} =100mA* ₂ (Duty 1/10 @ 400ms)
Viewing Angle*1	$2 heta_{1/2}$		50		deg	I _F =20mA*2
		2.0	2.4	2.8		$I_F = 0.1 \text{mA} *_2$
Forward Voltage*2	V_{F}	2.8	3.2	3.7	V	I _F =20mA*2
Forward Voltage*2 -25°C < T < 30°C	•	3.6	4.3	5.2		I _{FP} =100mA* ₂ (Duty 1/10 @ 400ms)
Reverse Current*2	I_R			50	μ A	$V_R=5V*2$

^{*1} When 4 LED dies are operated simultaneously.

Note: The products are sensitive to static electricity and care must be fully taken when handling products.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1.1 Page: 3 of 10

^{*2} For each die.

EVERLIGHT ELECTRONICS CO.,LTD.

59-146UTD/TR8

Color Ranks

	Rank B3				
X	0.327	0.323	0.344	0.347	
У	0.335	0.345	0.370	0.355	

	Rank B4				
X	0.347	0.344	0.370	0.370	
у	0.355	0.370	0.400	0.379	


		Rank B5				
2	X	0.336	0.327	0.347	0.351	
	y	0.316	0.335	0.355	0.334	

	Rank B6				
X	0.351	0.347	0.370	0.370	
y	0.334	0.355	0.379	0.358	

	Rank C0				
X	0.370	0.370	0.401	0.396	
у	0.358	0.400	0.425	0.391	

^{*}The C.I.E. 1931 chromaticity diagram (Tolerance ± 0.01).

CIE Chromaticity Diagram

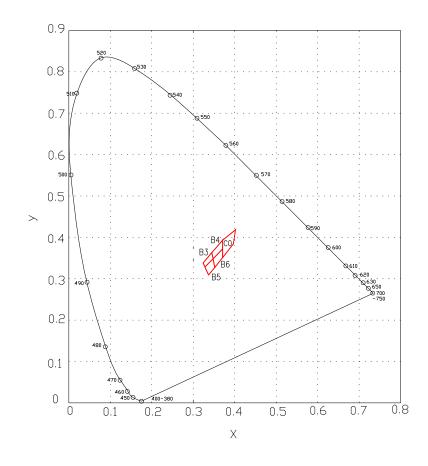

Everlight Electronics Co., Ltd.

Device No.:DES-596


http://www.everlight.com


Prepared date: 03-Apr-2007


Rev. 1.1


Page: 4 of 10


Typical Electro-Optical Characteristics Curves















Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1.1 Page: 5 of 10


Label explanation

CAT: Luminous Intensity Rank HUE: Chromaticity Coordinates REF: Forward Voltage Rank

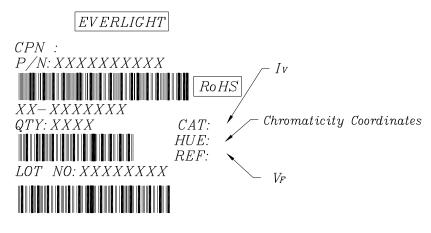

MADE IN TAIWAN


Reel Dimensions

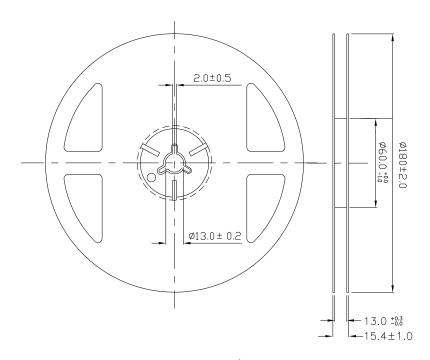

Note: The tolerance unless mentioned is ± 0.1 mm, unit is mm


Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1.1 Page: 6 of 10 Device No.:DES-596 Prepared date: 03-Apr-2007

Carrier Tape Dimensions: Taping Quantity: 800pcs

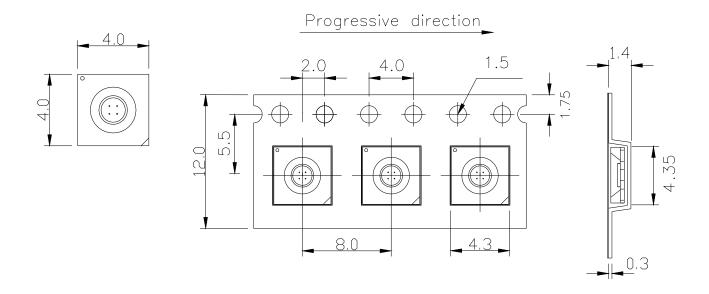

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Moisture Resistant Packaging

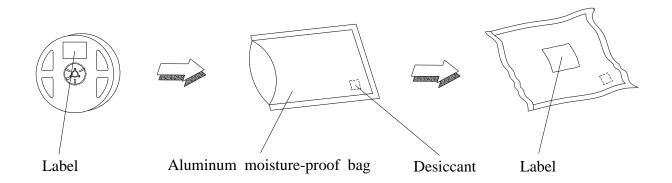

Everlight Electronics Co., Ltd.

Device No.:DES-596

http://www.everlight.com

Prepared date: 03-Apr-2007

Rev. 1.1

Page: 7 of 10



Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 5sec.	6 Min.	22 PCS.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min $\int 5 \text{ min}$ $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	$H: +100^{\circ}\mathbb{C}$ 5min $\int 10 \sec$ $L: -10^{\circ}\mathbb{C}$ 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°ℂ	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85%RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1.1 Page: 8 of 10


Precautions For Use

1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

- 2. Storage
- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package: The LEDs should be kept at 30°C or less and 90%RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under 30°C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

 Baking treatment: 60±5°C for 24 hours.
- 3. Soldering Condition
- 3.1 Pb-free solder temperature profile

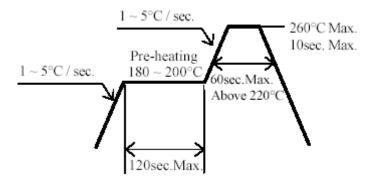

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1.1 Page: 9 of 10




4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

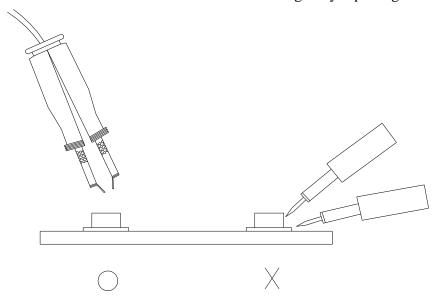

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev. 1.1 Page: 10 of 10