



# AK2922T

## Zero Drift operational amplifiers

### Feature

AK2922T is the dual channel CMOS operational amplifiers which is available to output with very low input offset voltage ( $\pm 1.0\mu\text{V}$ ) and near zero input offset drift.


It's operated with very small current consumptions, 1.05mA typ./ch (VDD:5.0V), which is available to operate full swing signals in output.

AK2922T is appropriated to Sensor Pre Amp. applications.

- Low Voltage, Single Supply Operation : 2.7V ~ 5.5V
- Very Low Input Offset Voltage :  $\pm 1.0\mu\text{V}$  typ.
- Near Zero Dirft over time and temperature :  $\pm 2.0\text{nV}/^\circ\text{C}$  typ.
- Full Swing Outputs to 10k $\Omega$  Load
- Power Supply Current : 1.05mA typ./ch (VDD: 5.0V, No Load)
- Gain Bandwidth : 4MHz typ.
- Operating Temperature Range :  $-40 \sim 125^\circ\text{C}$
- Package : TMSOP8

| Part Name | Channel Number | Package |
|-----------|----------------|---------|
| AK2922T   | 2              | TMSOP8  |

### Pin Location

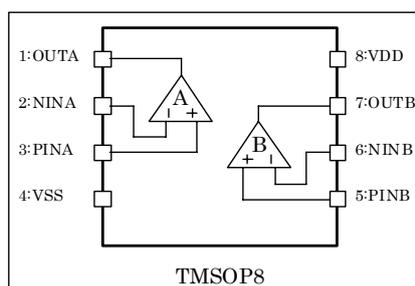

(AK2922T)

|                                  |
|----------------------------------|
| <b>Pin Function Descriptions</b> |
|----------------------------------|

| Pin number | Name | I/O note) | Function                      |
|------------|------|-----------|-------------------------------|
| 1          | OUTA | AO        | Amplifier A Output            |
| 2          | NINA | AI        | Amplifier A Inverted Input    |
| 3          | PINA | AI        | Amplifier A No Inverted Input |
| 4          | VSS  | PWR       | Power Supply Ground           |
| 5          | PINB | AI        | Amplifier B No Inverted Input |
| 6          | NINB | AI        | Amplifier B Inverted Input    |
| 7          | OUTB | AO        | Amplifier B Output            |
| 8          | VDD  | PWR       | Positive Power Supply         |

Note)

PWR : Power Supply  
 AI : Analog Input  
 AO : Analog Output

|                                 |
|---------------------------------|
| <b>Absolute Maximum Ratings</b> |
|---------------------------------|

VSS=0V ; Note

| Parameter                 | Symbol           | Min  | Max       | Units |
|---------------------------|------------------|------|-----------|-------|
| Supply Voltage            | VDD              | -0.3 | 6.5       | V     |
| Input Voltage             | V <sub>TD</sub>  | -0.3 | VDD + 0.3 | V     |
| Input Current             | I <sub>IN</sub>  | -10  | +10       | mA    |
| Storage Temperature Range | T <sub>stg</sub> | -55  | 150       | °C    |

Note : All voltage with respect to ground

WARNING :

Operational at or beyond these limits may result in permanent damage to the device. Normal operation is not guaranteed at these extremes.

|   |
|---|
| <b>Recommended Operating Conditions</b> |
|---|

| Parameter                      | Symbol         | Min. | Typ. | Max. | Units | Conditions                     |
|--------------------------------|----------------|------|------|------|-------|--------------------------------|
| Operationg Temperature Range 1 | T <sub>a</sub> | -40  |      | 85   | °C    | There is no limitation in use. |
| Operationg Temperature Range 2 | T <sub>a</sub> | 85   |      | 125  | °C    | There is limitation in use.    |
| Supply Voltage                 | VDD            | 2.7  |      | 5.5  | V     |                                |

Note : Please refer to directions in P.4.

\*We asuumes no responsibility for the usage beyond the conditions in this datasheet.

|                                   |
|-----------------------------------|
| <b>Electrical Characteristics</b> |
|-----------------------------------|

 DC Characteristics

VDD:5V, Ta: -40 to 125°C, unless otherwise noted (Note)

| Parameter                    | Min. | Typ.               | Max. | Units | Conditions                   |
|------------------------------|------|--------------------|------|-------|------------------------------|
| Input Voltage Offset         |      | ± 1                | ± 10 | μV    |                              |
| Input Voltage Offset Drift   |      | ± 2                | ± 20 | nV/°C |                              |
| Input Bias Current           |      | ± 50               |      | pA    | Ta=25°C                      |
| Input Common Mode Range      |      | 0.0 ~<br>VDD-0.2   |      | V     |                              |
| Output Voltage Swing         |      | 0.05 ~<br>VDD-0.05 |      | V     | RL ≥ 10kΩ connected to VDD/2 |
| Common Mode Rejection Ratio  | 100  | 130                |      | dB    |                              |
| Power Supply Rejection Ratio | 100  | 130                |      | dB    |                              |
| Large Signal Voltage Gain    | 100  | 130                |      | dB    | RL ≥ 10kΩ connected to VDD/2 |
| Short Circuit Current        |      | ± 50               |      | mA    |                              |
| Output Current               |      | ± 25               |      | mA    |                              |
| Power Supply Current         |      | 1.05               | 2.1  | mA/ch | VDD=5.0V, No Load            |

Note : Please refer to directions in P.4.

 AC Characteristics

VDD:5V, Ta: -40 to 125°C, unless otherwise noted (Note)

| Parameter                 | Min.         | Typ. | Max. | Units         | Conditions   |
|---------------------------|--------------|------|------|---------------|--|
| Gain Bandwidth            |              | 4    |      | MHz           | Av:1V/V  |
| Slew Rate                 |              | 5    |      | V/μs          | Av:1V/V  |
| Input Voltage Noise       |              | 25   |      | nVrms<br>/√Hz | f:1kHz   |
|                           | 0.1 – 10Hz   | 0.9  |      | μVpp          |  |
|                           | 0.1 – 1Hz    | 0.3  |      | μVpp          |  |
| Overload Recovery Time    |              | 0.02 |      | msec          | Av:50V/V   |
| Input Capacitance         | Differential | 1.5  |      | pF            |  |
|                           | Common Mode  | 12   |      | PF            |  |
| Maximum Capacitance Loads |              |      | 150  | pF            | Inverter : 0dB and more<br>Non-inverter : 6dB and more<br>(Please, not use Voltage-Follower circuit) |

Note : Please refer to directions in P.4.


**Directions**

AK2922T has the directions point about the Operating Temperature Range (Ta).

- 40°C ≤ Ta ≤ +85°C : There is no limitation in use.
- +85°C < Ta ≤ +125°C : There is limitation in use.


1. Use without problem : The difference input uses in the state of Imaginary Short.

- At use with the amplifier, the filter usage, and the buffer, etc.

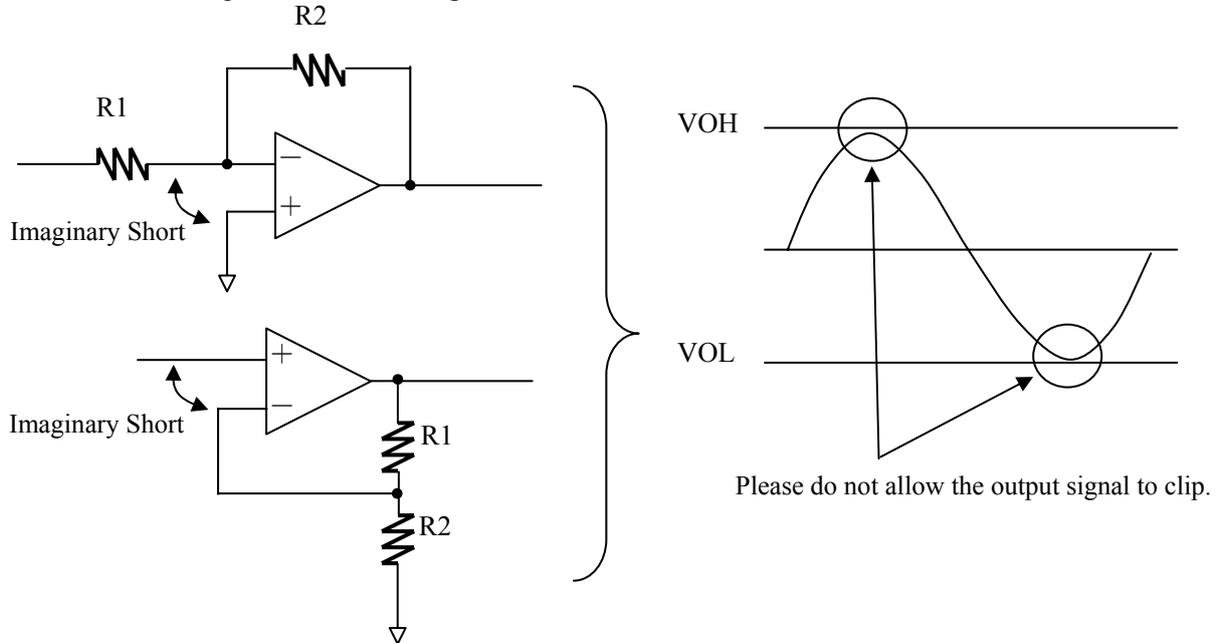


2. Use with possibility that problem occurs : A long term, when the potential difference exists in the difference input

- In case of using it as a comparator

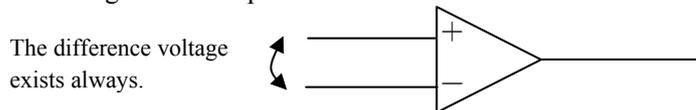


- Usage to which output regularly does clip in amplifying circuit etc. The problem is not in a transitional clip.

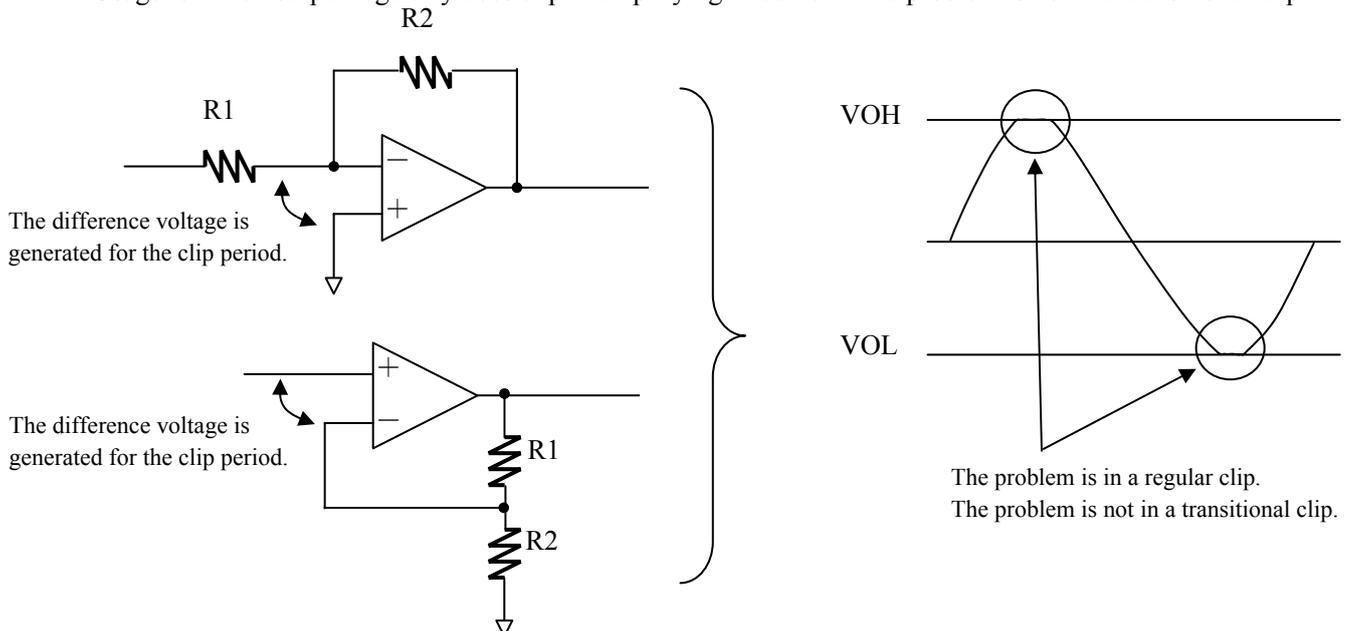


**Typical Operating Characteristics**


□ Supply Current vs. Temperature  
( $V_{in}: 1/2V_{DD}$ )

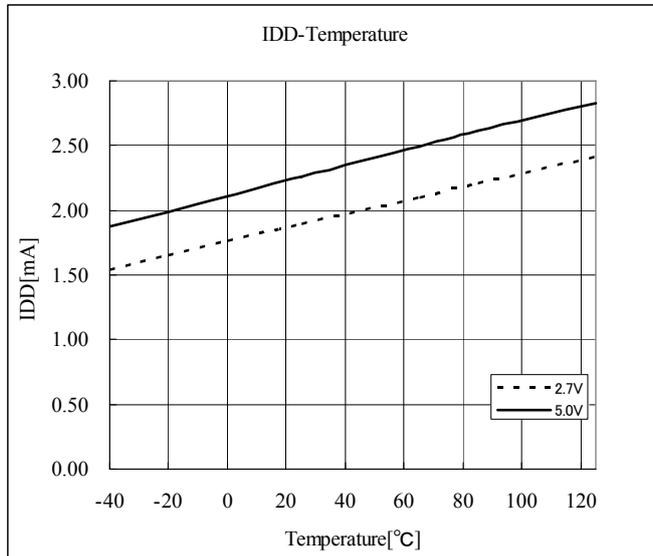


□ Supply Current vs. Supply Voltage  
( $V_{in}: 1/2V_{DD}$ )

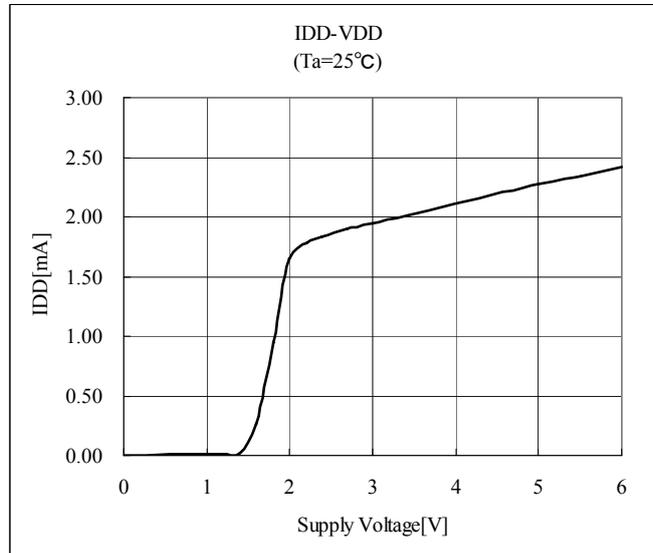


□ Output voltage vs. Load current  
(VDD=2.7V, Ta=25°C)

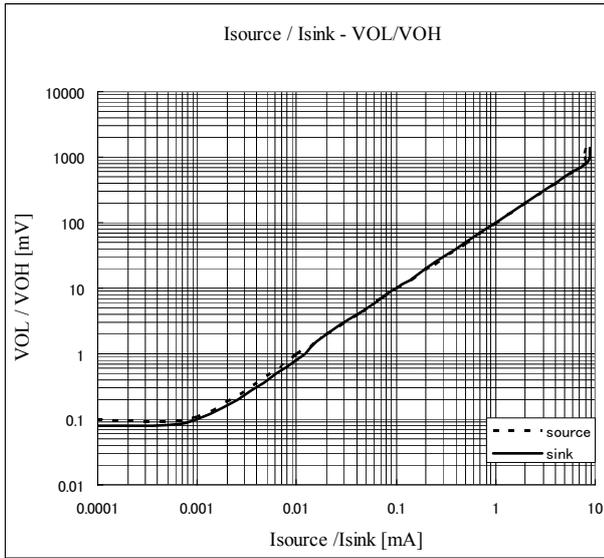


□ Output voltage vs. Load current  
(VDD=5V, Ta=25°C)

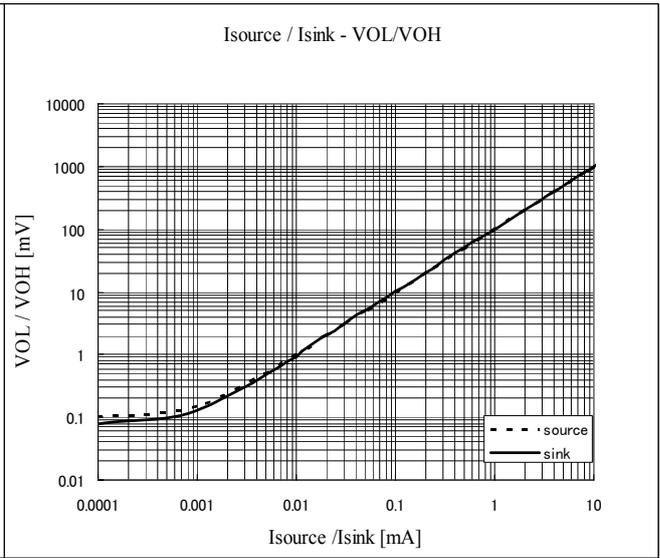


□ Closed loop gain vs. Frequency  
(VDD=2.7V, Ta=25°C)

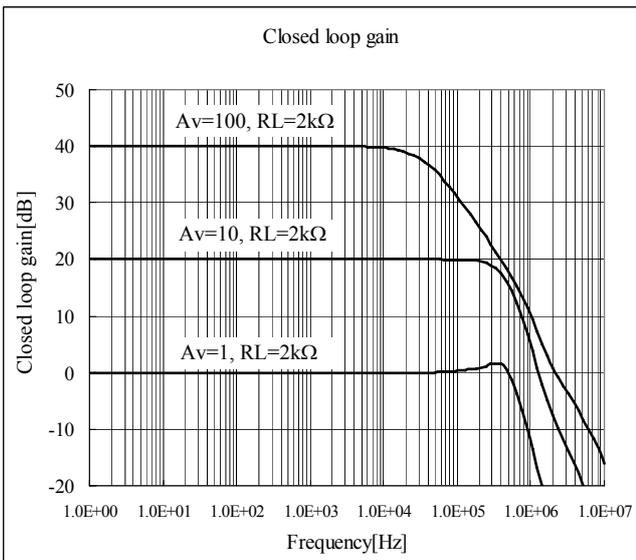


□ Closed loop gain vs. Frequency  
(VDD=5V, Ta=25°C)

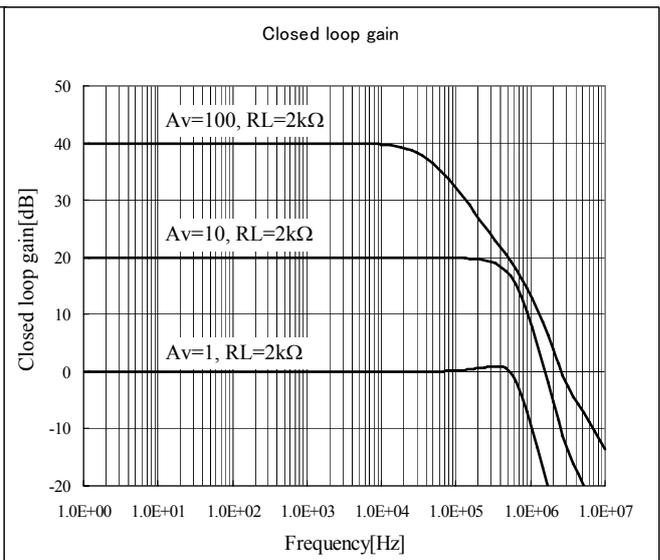


□ Open loop gain and Phase vs. Frequency  
(VDD=2.7V, Ta=25°C)

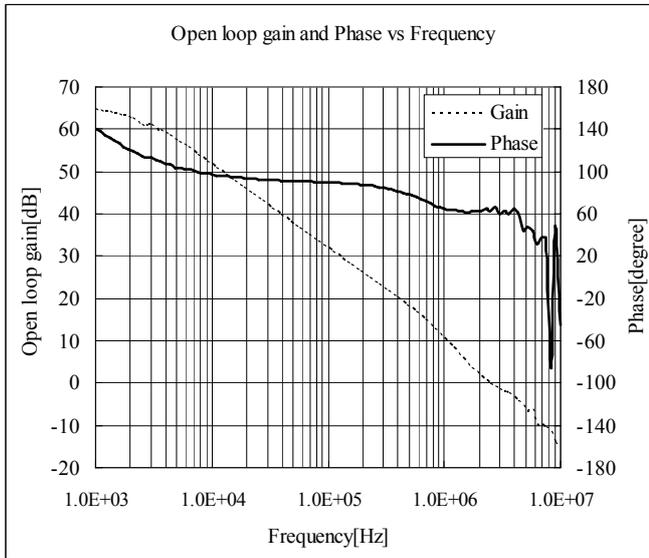


□ Open loop gain and Phase vs. Frequency  
(VDD=5V, Ta=25°C)

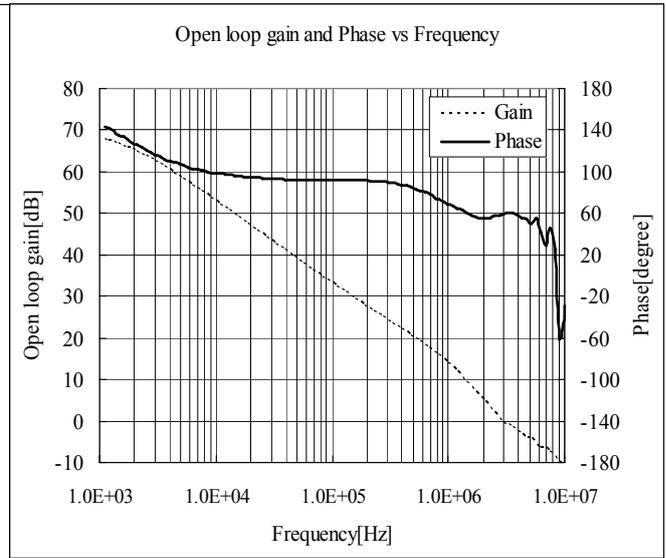

□ Output impedance vs. Frequency  
(VDD=2.7V, Ta=25°C)

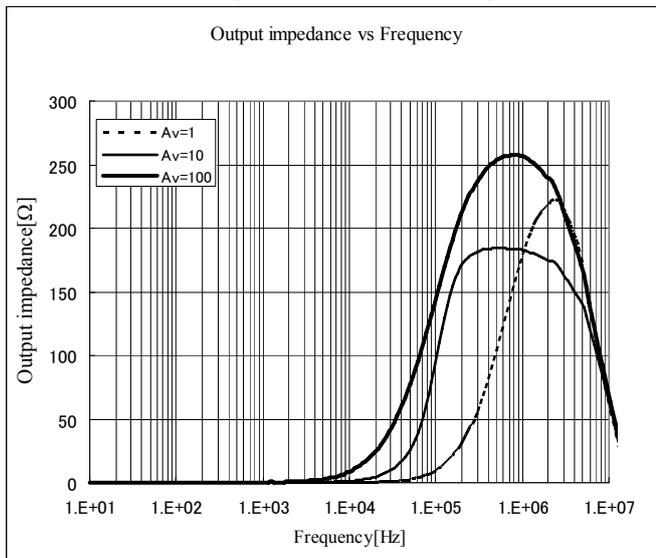


□ Output impedance vs. Frequency  
(VDD=5V, Ta=25°C)

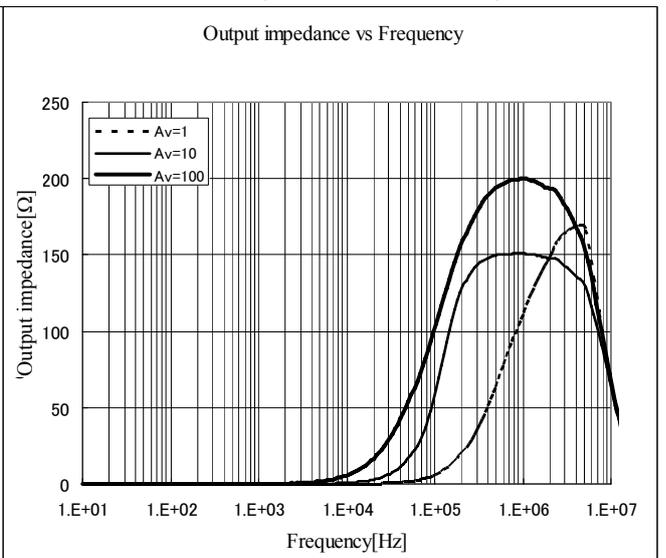



□ Small signal overshoot vs. Load Capacitance  
(VDD=2.7V, Ta=25°C)

□ Small signal overshoot vs. Load Capacitance  
(VDD=5V, Ta=25°C)

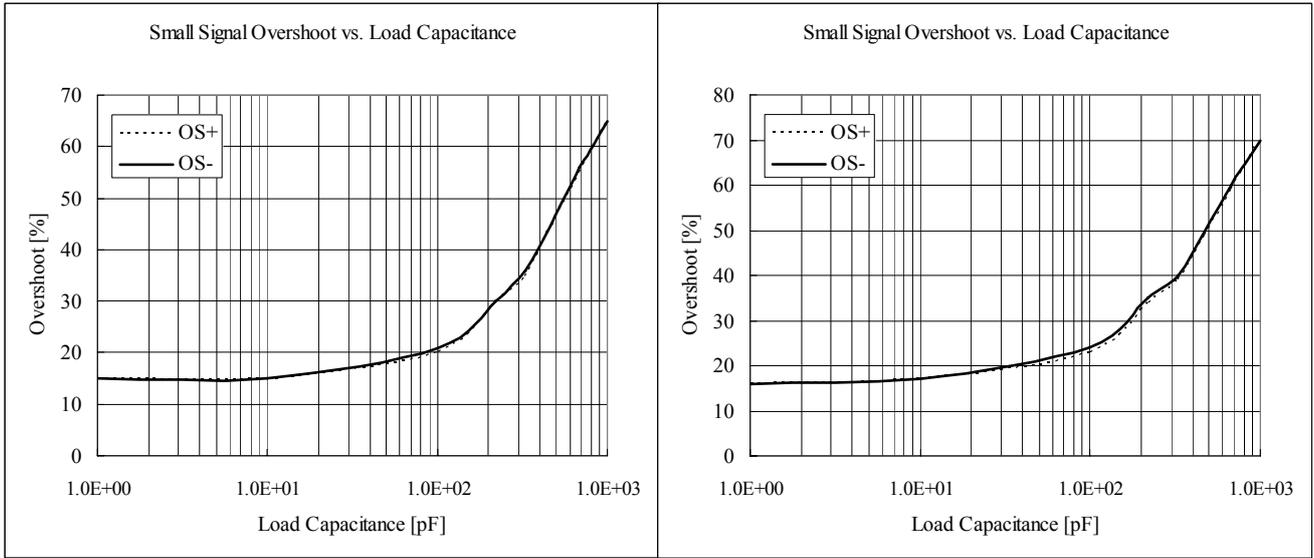


□ Positive overvoltage recovery  
(VDD/VSS = +2.5V/-2.5V, Ta = 25°C)


□ Negative overvoltage recovery  
(VDD/VSS = +2.5V/-2.5V, Ta = 25°C)

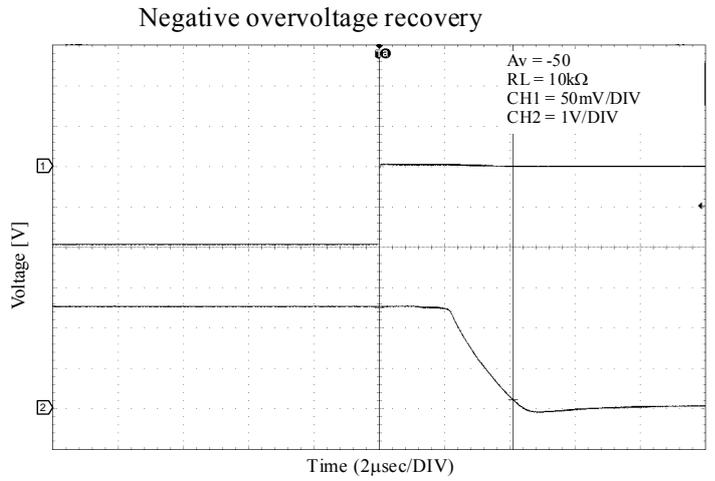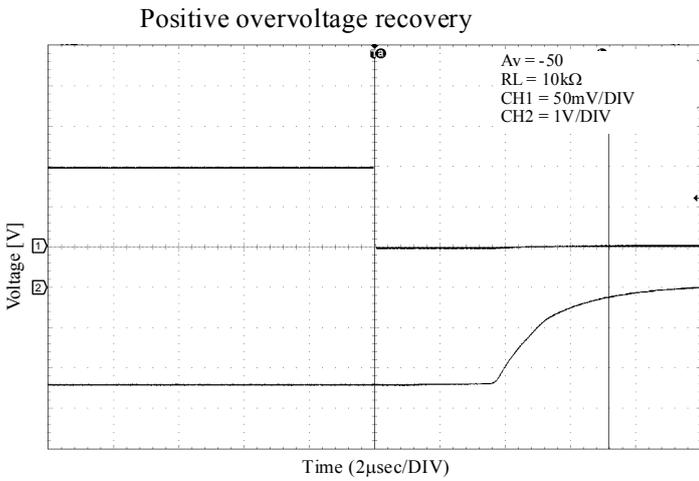


□ Common Mode Rejection Ratio vs. Frequency(Av=10)

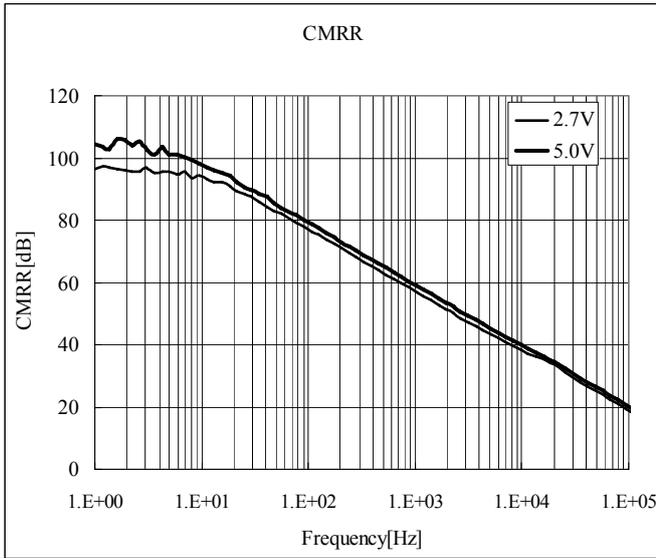

□ Power Supply Rejection Ratio vs. Frequency  
(VDD=2.7V, Ta=25°C)

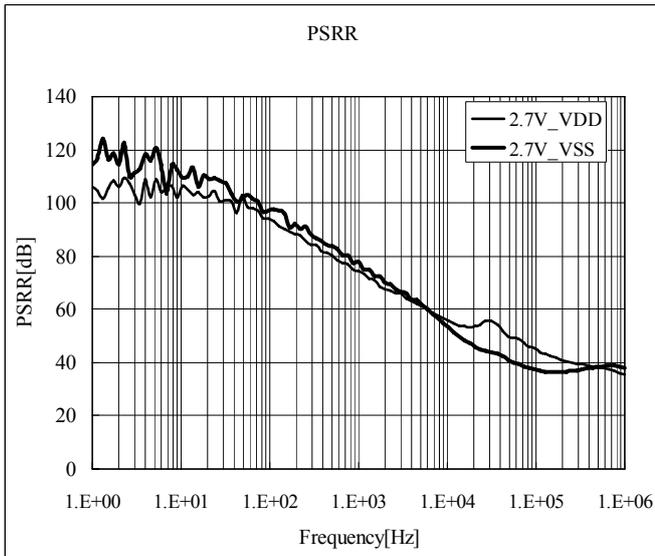


□ Power Supply Rejection Ratio vs. Frequency  
(VDD=5V, Ta=25°C)

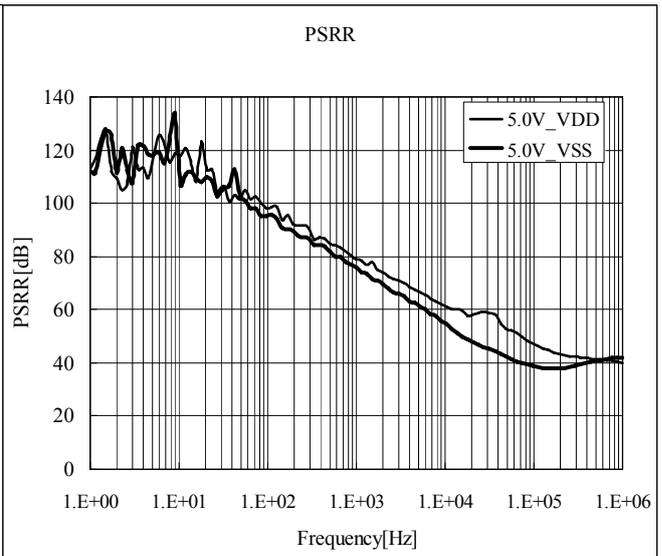


□ Maximum output swing vs. Frequency  
 (VDD=2.7V, Ta=25°C, Av = 1, RL = 10kΩ)


□ Maximum output swing vs. Frequency  
 (VDD=5V, Ta=25°C, Av = 1, RL = 10kΩ)

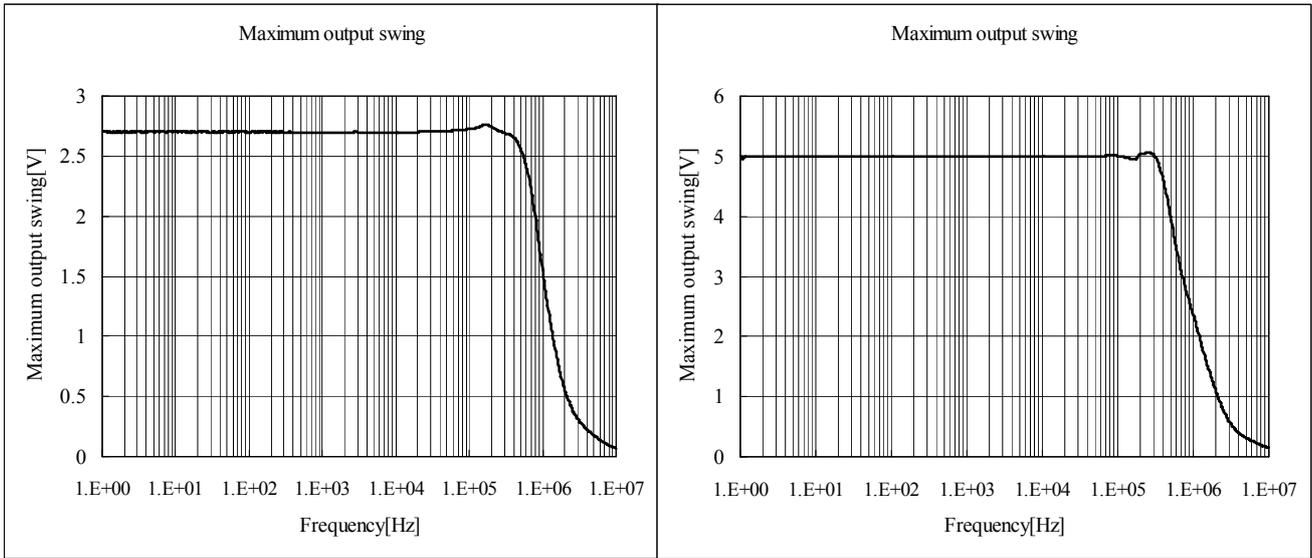


Voltage noise density  
(VDD=2.7V, Ta=25°C, f=0~2.5kHz)

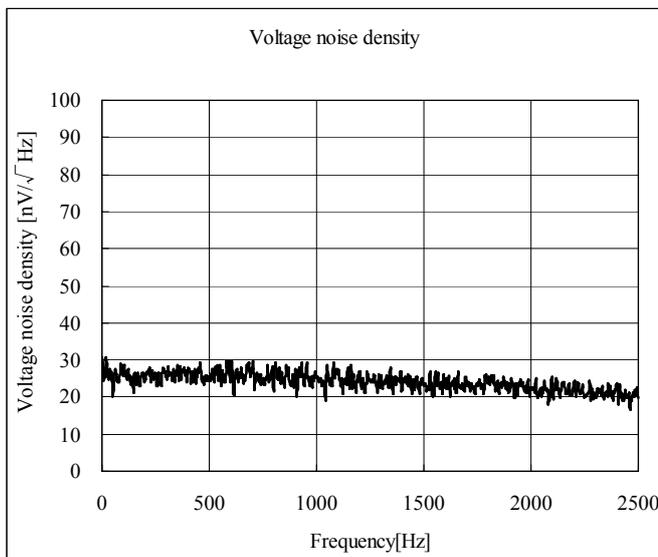


Voltage noise density  
(VDD=5V, Ta=25°C, f=0~2.5kHz)

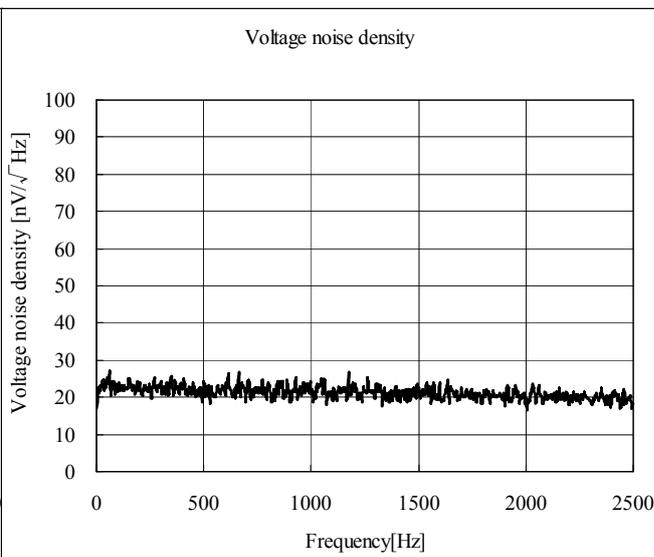


Voltage noise density  
(VDD=2.7V, Ta=25°C, f=0~20kHz)

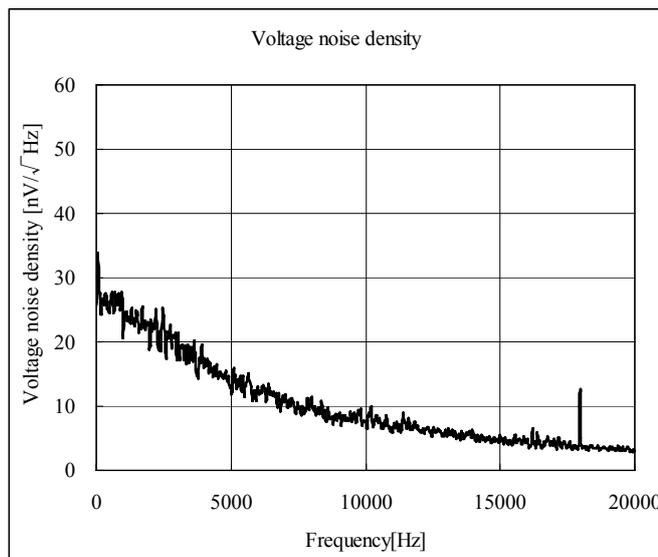


Voltage noise density  
(VDD=5V, Ta=25°C, f=0~20kHz)

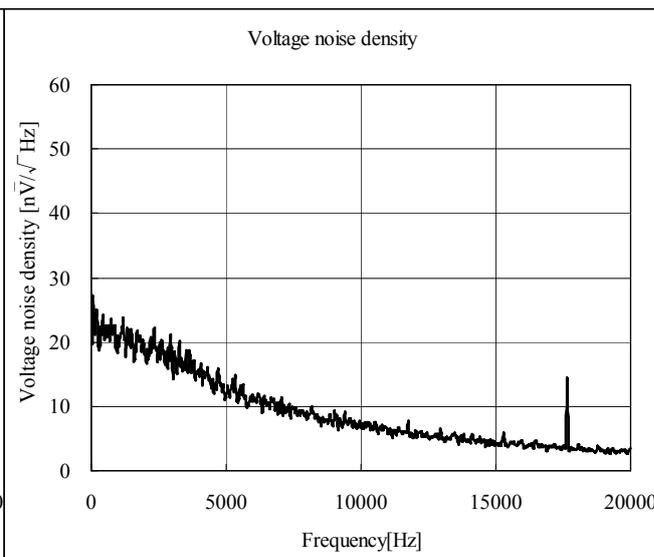


- Voltage noise density  
(VDD=5V, Ta=25°C, f=1~10kHz)

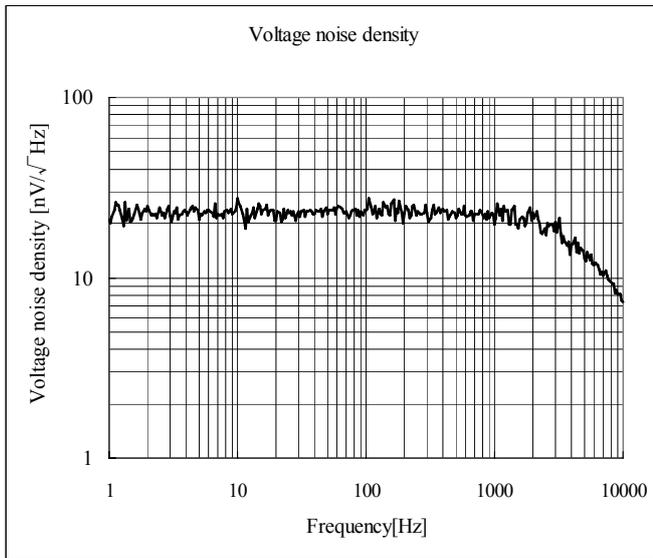


- Voltage noise  
(VDD=2.7V, Ta=25°C, f=0.1~10Hz)
- 0.1Hz to 10Hz Noise

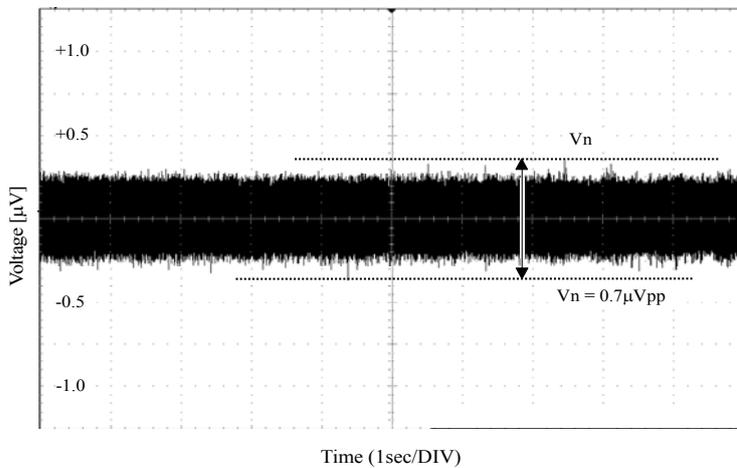


- Voltage noise  
(VDD=5V, Ta=25°C, f=0.1~10Hz)
- 0.1Hz to 10Hz Noise

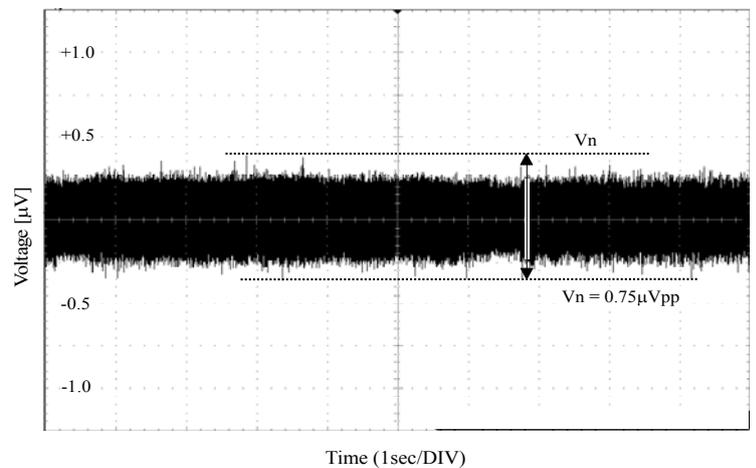


□ Output short-circuit current vs. Temperature  
(VDD= 2.7V, Ta= -40 to 85°C)

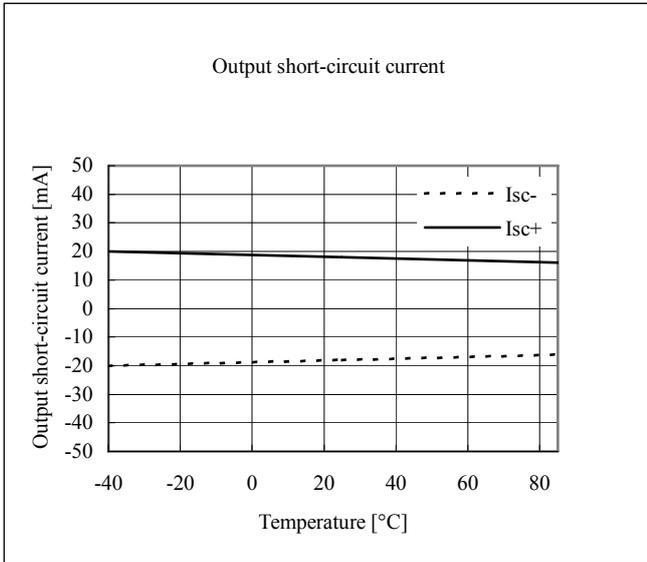

□ Maximum output swing vs. Frequency  
(VDD=5V, Ta=25°C, Ta= -40 to 85°C)

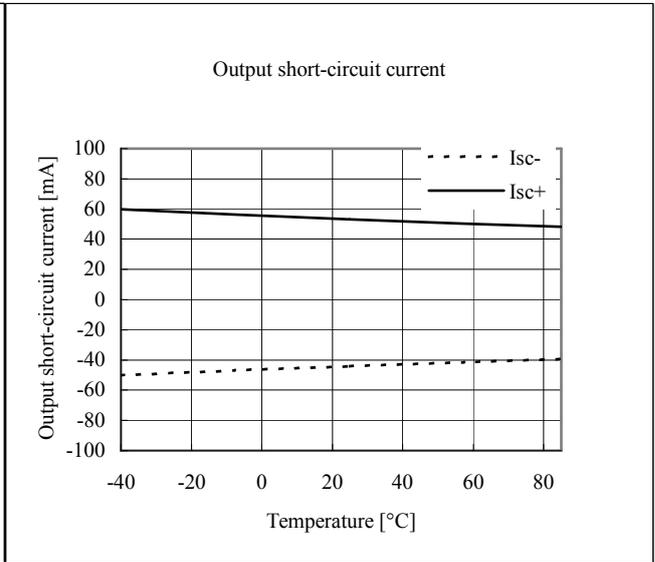


□ Input offset voltage drift(VDD=5V, Ta= -40 to 125°C)

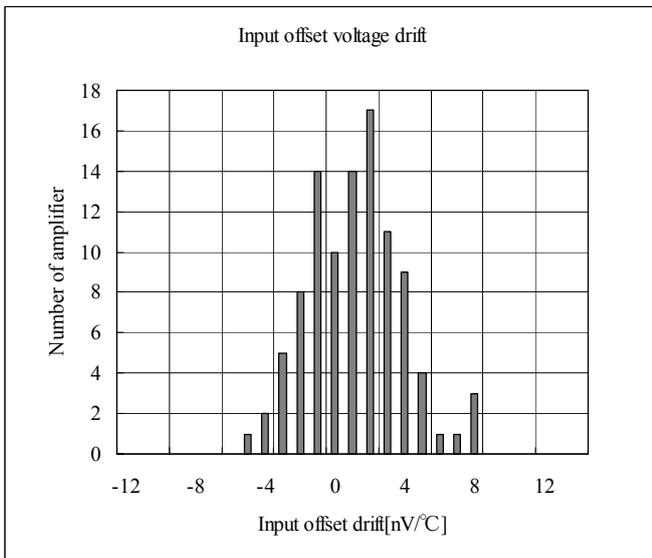

Package

1. Marking


1.1 TMSOP8

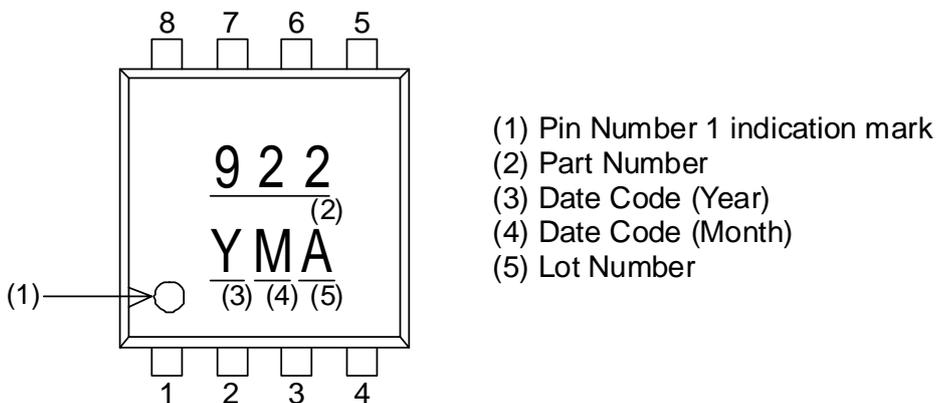

2. Outline Dimensions

2.1 TMSOP8 Package Outline

(UNIT:mm)

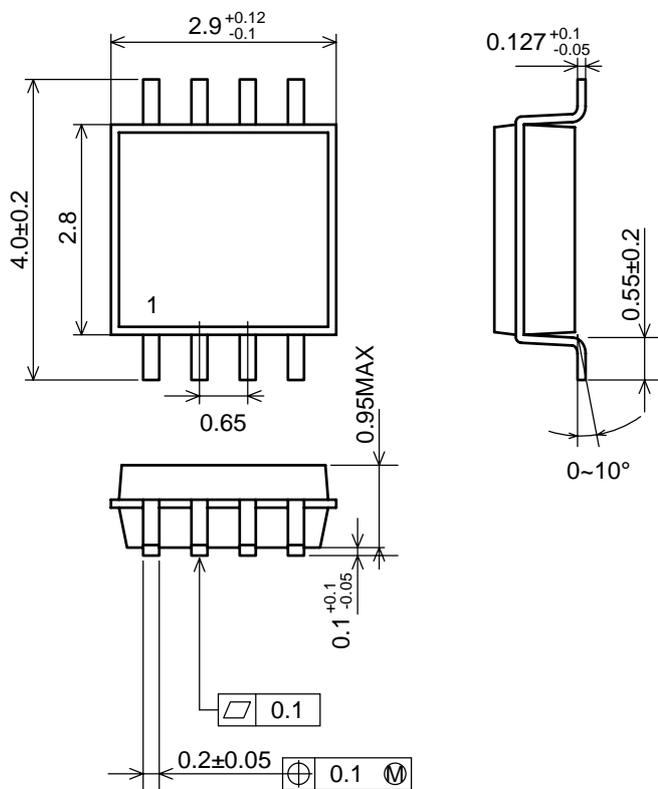

## IMPORTANT NOTICE

- These products and their specifications are subject to change without notice. When you consider any use or application of these products, please make inquiries the sales office of Asahi Kasei Microdevices Corporation (AKM) or authorized distributors as to current status of the products.
- Descriptions of external circuits, application circuits, software and other related information contained in this document are provided only to illustrate the operation and application examples of the semiconductor products. You are fully responsible for the incorporation of these external circuits, application circuits, software and other related information in the design of your equipments. AKM assumes no responsibility for any losses incurred by you or third parties arising from the use of these information herein. AKM assumes no liability for infringement of any patent, intellectual property, or other rights in the application or use of such information contained herein.
- Any export of these products, or devices or systems containing them, may require an export license or other official approval under the law and regulations of the country of export pertaining to customs and tariffs, currency exchange, or strategic materials.
- AKM products are neither intended nor authorized for use as critical components<sup>Note1)</sup> in any safety, life support, or other hazard related device or system<sup>Note2)</sup>, and AKM assumes no responsibility for such use, except for the use approved with the express written consent by Representative Director of AKM. As used here:
  - Note1) A critical component is one whose failure to function or perform may reasonably be expected to result, whether directly or indirectly, in the loss of the safety or effectiveness of the device or system containing it, and which must therefore meet very high standards of performance and reliability.
  - Note2) A hazard related device or system is one designed or intended for life support or maintenance of safety or for applications in medicine, aerospace, nuclear energy, or other fields, in which its failure to function or perform may reasonably be expected to result in loss of life or in significant injury or damage to person or property.
- It is the responsibility of the buyer or distributor of AKM products, who distributes, disposes of, or otherwise places the product with a third party, to notify such third party in advance of the above content and conditions, and the buyer or distributor agrees to assume any and all responsibility and liability for and hold AKM harmless from any and all claims arising from the use of said product in the absence of such notification.