

DC BLOCKS, Between Series

BNC / SMA, 10 MHz - 4 GHz, Inner Only

SPECIFICATIONS:


Models: 8313

RoHS
Compliant


Electrical:	
Frequency Range	10 MHz - 4 GHz
VSWR	1.35:1 Max.
Impedance	50 Ohms
Insertion Loss	0.5 dB Max.
Voltage Rating	100 Volts Max.
Operating Temp. Range	-65°C to +125°C
Mechanical:	
SMA Connectors	Passivated Stainless Steel
Mates with MILSTD-348	
BNC Connectors	Nickel Plated Brass
Mates with MILSTD-348	
Conductors	Gold Plated Beryllium Copper




Model Number: **8313MM**
BNC Male / SMA Male

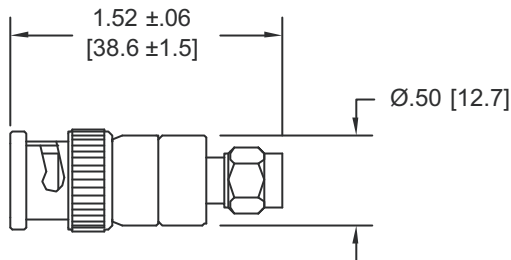


Model Number: **8313MF**
BNC Male / SMA Female

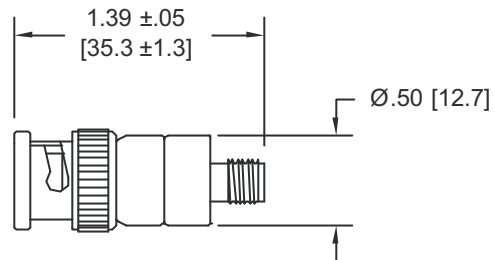

Model Number: **8313FM**
BNC Female / SMA Male

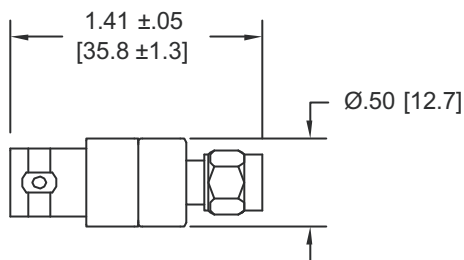

Model Number: **8313FF**
BNC Female / SMA Female

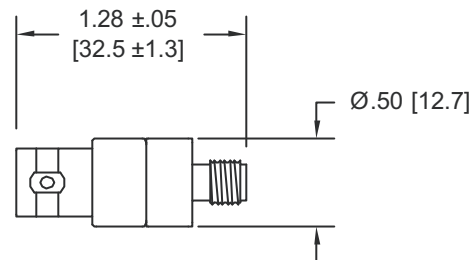

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.

8313: REVA



Aeroflex / Inmet, Inc. • 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.
888-244-6638 or 734-426-5553 • FAX: 734-426-5557
www.aeroflex.com/inmet • inmet@aeroflex.com