

DC BLOCKS

BNC (75Ω), 100 MHz - 4 GHz, 200 Volts

SPECIFICATIONS:

Models: 8181, 8182, 8183

RoHS
Compliant

Electrical:

Frequency Range _____ 100 MHz - 4 GHz
Insertion Loss _____ 0.5 dB Max.
VSWR _____ 1.35:1 Max.
Impedance _____ 75 Ohms
Voltage Rating _____ 200 Volts
Operating Temp Range _____ -65°C to +125°C

Materials:


*Connectors _____ Nickel Plated Brass
Center Conductors _____ Gold Plated Beryllium Copper

*75 Ohm BNC Connectors Mate Only with Other 75 Ohm BNC Series.
Mating with 50 Ohm BNC Connectors may cause Damage.

Model Number: **8181**
DC Block Type _____ Inner Only

Model Number: **8182**
DC Block Type _____ Outer Only

Model Number: **8183**
DC Block Type _____ Inner / Outer

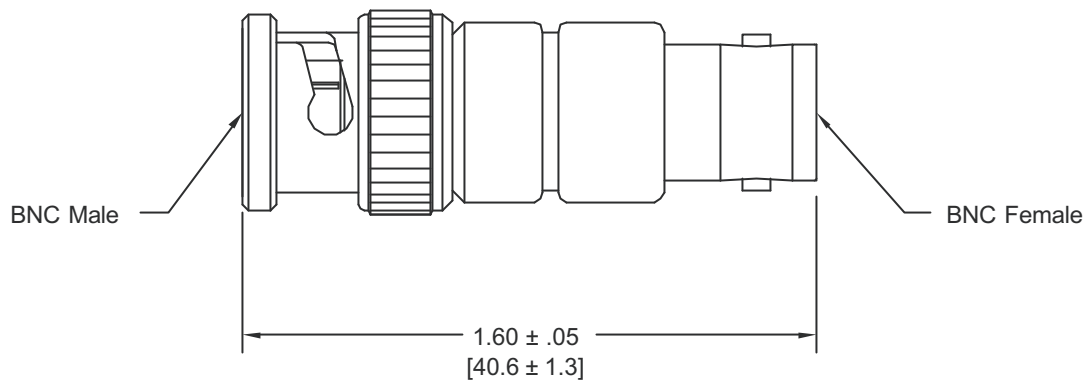

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.

8181: REV B



Aeroflex / Inmet, Inc. • 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.
888-244-6638 or 734-426-5553 • FAX: 734-426-5557
www.aeroflex-inmet.com • inmet-sales@aeroflex.com

