

Data Sheet May 21, 2007 FN6394.2

Dual, 500MHz Triple, Multiplexing Amplifiers

The ISL59483 contains a gain of 1 triple 4:1 MUX amplifier (MUX1), and a second gain of 2 triple 4:1 MUX amplifier (MUX2). Each feature high slew rate and excellent bandwidth for RGB video switching. They contain separate binary coded, channel select logic inputs (S0, S1), and separate logic inputs for High Impedance output (HIZ) and power-down ($\overline{\text{EN}}$) modes. The HIZ state presents a high impedance at the output so that both RGB MUX outputs can be wired together to form an 8:1 RGB MUX amplifier or they can be used in R-R, G-G, and B-B pairs to form a 4:1 differential input/output MUX. Separate power-down mode controls ($\overline{\text{EN1}}$, $\overline{\text{EN2}}$) are included to turn off unneeded circuitry in power sensitive applications. With both $\overline{\text{EN}}$ pins pulled high, the ISL59483 enters a standby power mode, consuming just 36mW.

Ordering Information

PART NUMBER (Note)	PART MARKING	TAPE & REEL	PACKAGE (Pb-free)	PKG. DWG. #
ISL59483IRZ	ISL59483 IRZ	-	48 Ld Exposed Pad 7x7 QFN	L48.7x7B
ISL59483IRZ-T13	ISL59483 IRZ	13"	48 Ld Exposed Pad 7x7 QFN	L48.7x7B
ISL59483EVAL1Z	Evaluation PC	В		

NOTE: Intersil Pb-free plus anneal products employ special Pb-free material sets; molding compounds/die attach materials and 100% matte tin plate termination finish, which are RoHS compliant and compatible with both SnPb and Pb-free soldering operations. Intersil Pb-free products are MSL classified at Pb-free peak reflow temperatures that meet or exceed the Pb-free requirements of IPC/JEDEC J STD-020.

TABLE 1. CHANNEL SELECT LOGIC TABLE ISL59483

S1-1, 2	S0-1, 2	EN1, EN2	HIZ1, 2	OUTPUT1, 2
0	0	0	0	IN0 (A, B, C)
0	1	0	0	IN1 (A, B, C)
1	0	0	0	IN2 (A, B, C)
1	1	0	0	IN3 (A, B, C)
Х	Х	1	Х	Power-down
Х	Х	0	1	High Z


Features

- Separate gain of 1 and gain of 2, triple 4:1 multiplexers for RGB
- Externally configurable for various video MUX circuits including
 - 8:1 RGB MUX with selectable gains of 1 or 2
 - Two separate 4:1 RGB MUX with gains of 1 and 2
- High impedance outputs (HIZ)
- Power-down mode (EN)
- ±5V operation
- $\pm 870 \text{V/}\mu\text{s}$ slew rate (G = 1), $\pm 1600 \text{V/}\mu\text{s}$ slew rate (G = 2)
- 500MHz bandwidth
- Supply current 16mA/CH
- Pb-free plus anneal (RoHS compliant)

Applications


- HDTV/DTV analog inputs
- · Video projectors
- Computer monitors
- · Set-top boxes
- Security video
- Broadcast video equipment

Pinout

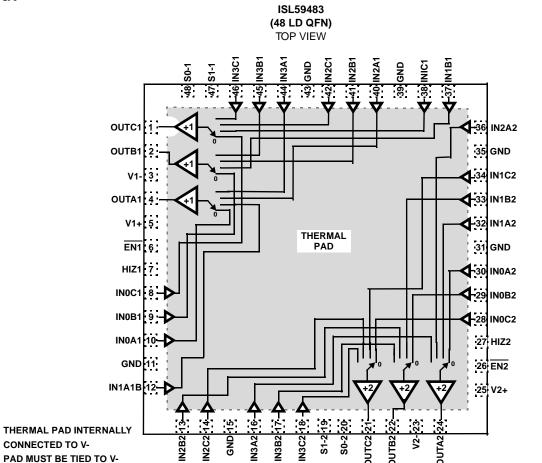

Functional Diagram ISL59483

PAD MUST BE TIED TO V-

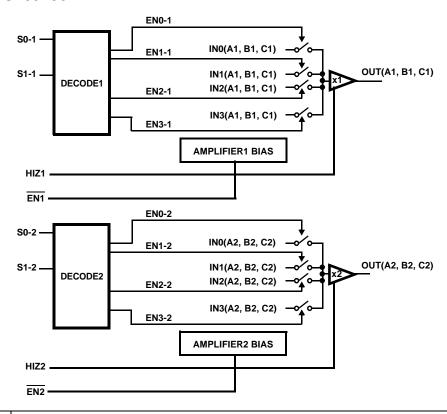

Absolute Maximum Ratings (T_A = +25℃)

Supply Voltage (V+ to V-)11V
Input Voltage
Supply Turn-on Slew Rate
Digital and Analog Input Current (Note 1) 50mA
Output Current (Continuous) 50mA
ESD Rating
Human Body Model (Per MIL-STD-883 Method 3015.7)2500V
Machine Model

Thermal Information

Storage Temperature Range	65℃ to +150℃
Ambient Operating Temperature	40℃ to +85℃
Operating Junction Temperature	40℃ to +125℃
Power Dissipation	See Curves
Pb-free reflow profile	see link below
http://www.intersil.com/pbfree/Pb-FreeReflow.asp	

CAUTION: Stresses above those listed in "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress only rating and operation of the device at these or any other conditions above those indicated in the operational sections of this specification is not implied.

NOTE:

- 1. If an input signal is applied before the supplies are powered up, the input current must be limited to these maximum values.
- 2. θ_{JA} is measured in free air with the component mounted on a high effective thermal conductivity test board with "direct attach" features. See Tech Brief TB379.

IMPORTANT NOTE: All parameters having Min/Max specifications are guaranteed. Typical values are for information purposes only. Unless otherwise noted, all tests are at the specified temperature and are pulsed tests, therefore: $T_J = T_C = T_A$

Electrical Specifications V1+=V2+=+5V, V1-=V2-=-5V, GND=0V, $T_A=+25$ °C, Input Video = $1V_{P-P}$ and $R_L=500\Omega$ to GND, $C_L=5pF$ unless otherwise specified.

PARAMETER	DESCRIPTION	CONDITIONS	MIN	TYP	MAX	UNIT
GENERAL						
+I _S Enabled Enabled Supply Current		No load, V _{IN} = 0V, EN1, EN2 Low	75	92	100	mA
-I _S Enabled	Enabled Supply Curren	No load, V _{IN} = 0V, EN1, EN2 Low	-96	-87	-68	mA
+I _S Disabled	Disabled Supply Current	No load, V _{IN} = 0V, EN1, EN2 High	4	6.5	8	μА
-I _S Disabled	Disabled Supply Current	No load, V _{IN} = 0V, EN1, EN2 High	-200	-10		μΑ
V _{OUT}	MUX1: Positive and Negative Output Swing	$V_{IN} = \pm 3.5 V$, $R_L = 500 \Omega$	3.1	3.4		V
	MUX2: Positive and Negative Output Swing	$V_{IN} = \pm 2.5V; R_L = 500\Omega$	3.8	4.0	4.2	V
lout	Output Current	$R_L = 10\Omega$ to GND	80	125		mA
Vos	MUX1: Output Offset Voltage	V _{IN} = 0V	-10	2	14	mV
	MUX2: Output Offset Voltage	V _{IN} = 0V	-60	-25	20	mV
lb	Input Bias Current	V _{IN} = 0V	-10	-2	+10	μΑ
R _{OUT}	MUX1: HIZ Output Resistance	HIZ = Logic High		1.2		МΩ
	MUX2: HIZ Output Resistance	HIZ = Logic High	700	1000	1300	Ω
R _{OUT}	Enabled Output Resistance	HIZ = Logic Low		0.1		Ω
R _{IN}	Input Resistance	V _{IN} = ±3.5V		10		МΩ
A _{CL} or A _V	MUX1: Voltage Gain	$V_{IN} = \pm 1.5 V, R_{L} = 500 \Omega$	0.98	0.99	1.02	V/V
	MUX2: Voltage Gain	$V_{IN} = \pm 1.5 V, R_{L} = 500 \Omega$	1.94	1.99	2.04	V/V
I _{HIZ}	MUX1: Output Current in High Impedance State	V _{OUT} = 0V		-9		μA
LOGIC						
V _{IH}	Input High Voltage (Logic Inputs)		2			V
V _{IL} Input Low Voltage (Logic Inputs)					0.8	V
I _{IH} Input High Current (Logic Inputs) V _H = 5V		V _H = 5V	200	270	320	μΑ
I _{IL} Input Low Current (Logic Inputs)		V _L = 0V	-10	-1	+10	μΑ

intersil FN6394.2 May 21, 2007 **Electrical Specifications** V1+=V2+=+5V, V1-=V2-=-5V, GND=0V, $T_A=+25$ °C, Input Video = $1V_{P-P}$ and $R_L=500\Omega$ to GND, $C_L=5pF$ unless otherwise specified. **(Continued)**

PARAMETER	DESCRIPTION	CONDITIONS	MIN	TYP	MAX	UNIT
AC GENERAL						
PSRR	MUX1: Power Supply Rejection Ratio	DC, PSRR V+ and V- combined	52	56		dB
	MUX2: Power Supply Rejection Ratio	DC, PSRR V+ and V- combined	45	53		dB
ISO	Channel Isolation	$f = 10MHz$, Ch-Ch X-Talk and Off Isolation, $C_L = 1.5pF$	75			dB
dG	MUX1: Differential Gain Error	NTC-7, RL = 150, C _L = 1.5pF		0.02		%
	MUX2: Differential Gain Error	NTC-7, R _L = 150, C _L = 1.2pF		0.008		%
dP	MUX1: Differential Phase Error	NTC-7, RL = 150, C _L = 1.5pF		0.02		0
	MUX2: Differential Phase Error	NTC-7, R _L = 150, C _L = 1.2pF		0.01		0
BW	Small Signal -3dB Bandwidth	$V_{OUT} = 0.2V_{P-P}$; $C_L = 1.5pF R_L = 500\Omega$		500		MHz
FBW	MUX1: 0.1dB Bandwidth	$C_L = 1.5 pF R_L = 500 \Omega$		60		MHz
		$C_L = 4.7 pF R_L = 500 \Omega$		120		MHz
FBW	MUX2: 0.1dB Bandwidth	$C_L = 1.1 pF R_L = 500 \Omega$		160		MHz
		$C_L = 1.1 pF R_L = 150 \Omega$		50		MHz
SR	MUX1: Slew Rate	25% to 75%, R _L = 150Ω, Input Enabled, C _L = 1.5pF		±870		V/µs
	MUX2: Slew Rate	25% to 75%, R _L = 150Ω, Input Enabled, C _L = 1.5pF		±1600		V/µs
WITCHING CH	HARACTERISTICS			1	l	•
V _{GLITCH}	Channel-to-Channel Switching Glitch	V _{IN} = 0V C _L = 1.2pF		40		mV _{P-F}
MUX1:	EN Switching Glitch	V _{IN} = 0V C _L = 1.2pF		300		mV _{P-F}
	HIZ Switching Glitch	V _{IN} = 0V C _L = 1.2pF		200		mV _{P-F}
V _{GLITCH}	Channel-to-Channel Switching Glitch	$V_{IN} = 0V, R_L = 150\Omega; C_L = 2.1pF$		15		mV _{P-F}
MUX2:	EN Switching Glitch	$V_{IN} = 0V, R_L = 150\Omega; C_L = 2.1pF$		1800		mV _{P-F}
	HIZ Switching Glitch	$V_{IN} = 0V$, $R_L = 150\Omega$; $C_L = 2.1pF$		340		mV _{P-F}
t _{SW-L-H}	Channel Switching Time Low to High	1.2V logic threshold to 10% movement of analog output		22		ns
t _{SW-H-L}	Channel Switching Time High to Low	1.2V logic threshold to 10% movement of analog output		25		ns
tr, tf	Rise and Fall Time	10% to 90%; V_{IN} = 1V R_L =500Ω C_L = 1.2pF		1.2		ns
		10% to 90%; V_{IN} = 0.1V R_L =500Ω C_L =1.2pF		0.7		ns
ts	0.1% Settling Time	$V_{IN} = 1V R_L = 500\Omega C_L = 1.2pF$		22		ns
tpd	Propagation Delay	10% to 10%		0.73		ns

FN6394.2 May 21, 2007 intersil

Typical Performance Curves $V_S = \pm 5V$, $R_L = 500\Omega$ to GND, $T_A = +25$ °C, unless otherwise specified.




FIGURE 1. MUX1: GAIN vs FREQUENCY vs CL




FIGURE 2. MUX1: GAIN vs FREQUENCY vs RL




FIGURE 3. MUX2: SMALL SIGNAL GAIN vs FREQUENCY vs C_{L} INTO 500Ω LOAD




FIGURE 4. MUX2: SMALL SIGNAL GAIN vs FREQUENCY vs $\mathbf{C_L}$ INTO 150 Ω LOAD




FIGURE 5. MUX1: 0.1dB GAIN vs FREQUENCY




FIGURE 6. MUX1: ROUT vs FREQUENCY

Typical Performance Curves $V_S = \pm 5V$, $R_L = 500\Omega$ to GND, $T_A = +25$ °C, unless otherwise specified. (Continued)




FIGURE 7. MUX2: LARGE SIGNAL GAIN vs FREQUENCY vs ${\rm C_L~INTO~500\Omega~LOAD}$




FIGURE 8. MUX2: LARGE SIGNAL GAIN vs FREQUENCY vs ${
m C_L}$ INTO 150 Ω LOAD




FIGURE 9. MUX2: GAIN vs FREQUENCY vs RL




FIGURE 10. MUX2: 0.1dB GAIN FLATNESS




FIGURE 11. MUX2: Z_{OUT} vs FREQUENCY - ENABLED




FIGURE 12. MUX2: Z_{OUT} vs FREQUENCY - HIZ

 $\textbf{Typical Performance Curves} \ \, \text{V}_{\text{S}} = \pm 5 \, \text{V}, \, \text{R}_{\text{L}} = 500 \Omega \, \, \text{to GND}, \, \text{T}_{\text{A}} = +25 \, \text{C}, \, \text{unless otherwise specified}. } \ \, \textbf{(Continued)}$




FIGURE 13. MUX1: CROSSTALK AND OFF ISOLATION




FIGURE 14. MUX 2: CROSSTALK AND OFF ISOLATION




FIGURE 15. MUX1: INPUT NOISE vs FREQUENCY




FIGURE 16. MUX2: INPUT NOISE vs FREQUENCY




FIGURE 17. MUX 1: PSRR vs FREQUENCY




FIGURE 18. MUX 2: PSRR vs FREQUENCY

Typical Performance Curves $V_S = \pm 5V$, $R_L = 500\Omega$ to GND, $T_A = +25$ °C, unless otherwise specified. (Continued)




FIGURE 19. MUX 2: DIFFERENTIAL GAIN AND PHASE; $V_{OUT} = 0.2 V_{P-P}, \, F_O = 3.58 \text{MHz}, \, R_L = 500 \Omega$




FIGURE 20. MUX 2: DIFFERENTIAL GAIN AND PHASE; $V_{OUT} = 0.2 V_{P-P}, \, F_O = 3.58 \text{MHz}, \, R_L = 150 \Omega$




FIGURE 21. MUX 1: SMALL SIGNAL TRANSIENT RESPONSE




FIGURE 22. MUX 2: SMALL SIGNAL TRANSIENT RESPONSE; $R_L = 500\Omega \label{eq:RL}$




FIGURE 23. MUX 2: SMALL SIGNAL TRANSIENT RESPONSE; R_L = 150 Ω

Typical Performance Curves $V_S = \pm 5V$, $R_L = 500\Omega$ to GND, $T_A = +25$ °C, unless otherwise specified. (Continued)




FIGURE 24. MUX2 : LARGE SIGNAL TRANSIENT RESPONSE; $\mathbf{R_L} = \mathbf{500}\Omega$




FIGURE 25. MUX 2: LARGE SIGNAL TRANSIENT RESPONSE; $R_L = 150\Omega \label{eq:RL}$




FIGURE 26. MUX 2: PULSE OVERSHOOT vs V $_{\mbox{OUT}},$ $\mbox{C}_{\mbox{L}};$ $\mbox{R}_{\mbox{L}}\!=\!500\Omega$




FIGURE 27. MUX 2: PULSE OVERSHOOT vs $\text{V}_{\mbox{OUT}}, \text{C}_{\mbox{L}}; \\ R_{\mbox{L}} = \mbox{150}\Omega$




FIGURE 28. MUX 1: CHANNEL TO CHANNEL SWITCHING GLITCH $\,\mathrm{V_{IN}} = 0\,\mathrm{V}$




FIGURE 29. MUX 2: CHANNEL TO CHANNEL SWITCHING GLITCH $V_{IN} = 0V$

Typical Performance Curves $V_S = \pm 5V$, $R_L = 500\Omega$ to GND, $T_A = +25$ °C, unless otherwise specified. (Continued)




FIGURE 30. MUX 1: CHANNEL TO CHANNEL TRANSIENT RESPONSE $V_{IN} = 1V$




FIGURE 31. MUX 2: CHANNEL TO CHANNEL TRANSIENT RESPONSE $V_{IN} = 1V$




FIGURE 32. MUX 1: ENABLE SWITCHING GLITCH VIN = 0V




FIGURE 33. MUX 2: ENABLE SWITCHING GLITCH VIN = 0V




FIGURE 34. MUX 1: ENABLE TRANSIENT RESPONSE VIN = 1V




FIGURE 35. MUX 2: ENABLE TRANSIENT RESPONSE VIN = 1V

 $\textbf{Typical Performance Curves} \ \, \text{V}_{\text{S}} = \pm 5 \, \text{V}, \ \, \text{R}_{\text{L}} = 500 \Omega \ \, \text{to GND}, \ \, \text{T}_{\text{A}} = +25 \, \text{C}, \ \, \text{unless otherwise specified}. }$




FIGURE 36. MUX 1: HIZ SWITCHING GLITCH VIN = 0V




FIGURE 37. MUX 2: HIZ SWITCHING GLITCH VIN = 0V




FIGURE 38. MUX 1: HIZ TRANSIENT RESPONSE $V_{IN} = 1V$




FIGURE 39. MUX 2: HIZ TRANSIENT RESPONSE $V_{IN} = 1V$




FIGURE 40. PACKAGE POWER DISSIPATION VS AMBIENT TEMPERATURE

11





FIGURE 41. PACKAGE POWER DISSIPATION VS AMBIENT TEMPERATURE

Pin Description

1	ISL59483 (48 LD QFN)	PIN NAME	EQUIVALENT CIRCUIT	DESCRIPTION
3,23 V1-, V2- Circuit 4A 4 OUTA1 Circuit 3 5,25 V14-, V2+ Circuit 4A 6 ENT 6 ENT 6 ENT 7 Circuit 2 7 HIZ1 7 Circuit 2 8 INDC1 Circuit 3 1 Circuit 4A 6 ENT 7 HIZ2 7 HIZ2 8 INDC1 Circuit 4A 6 Circuit 5 8 INDC1 Circuit 4A 6 Circuit 5 9 INDB1 Circuit 5 1 Channel 0 input for amplifier C1 1 Channel 0 input for amplifier B1 1 Circuit 1 1 Channel 0 input for amplifier B1 1 INDA1 Circuit 1 1 Channel 0 input for amplifier B1 1 INDA1 Circuit 1 1 Channel 1 input for amplifier B2 1 INDA2 Circuit 1 1 Channel 2 input for amplifier B2 1 INDA2 Circuit 1 1 Channel 3 input for amplifier B2 1 INDA2 Circuit 1 1 Channel 3 input for amplifier B2 1 INDA2 Circuit 1 1 Channel 3 input for amplifier B2 1 INDA2 Circuit 1 1 Channel 3 input for amplifier B2 1 INDA2 Circuit 1 1 Channel 3 input for amplifier B2 1 INDA2 Circuit 1 1 Channel 3 input for amplifier B2 1 INDA2 Circuit 1 1 Channel 3 input for amplifier B2 1 INDA2 Circuit 1 1 Channel 3 input for amplifier B2 1 INDA2 Circuit 1 1 Channel 3 input for amplifier B2 1 INDA2 Circuit 1 1 Channel 3 input for amplifier B2 1 INDA2 Circuit 1 1 Channel 3 input for amplifier B2 1 INDA2 Circuit 1 1 Channel 3 input for amplifier B2 1 INDA2 Circuit 1 1 Channel 3 input for amplifier B2 1 INDA2 Circuit 1 1 Channel 3 input for amplifier B2 1 INDA2 Circuit 1 1 Channel 3 input for amplifier B2 1 INDA2 Circuit 1 1 Channel 3 input for amplifier B2 1 INDA2 Circuit 1 1 Channel 3 input for amplifier B2 2 Channel 3 input for amplifier B2 3 Circuit 1 3 Channel 3 input for amplifier B2 3 Circuit 1 3 Channel 3 input for amplifier B2 3 Circuit 1 3 Channel 3 input for amplifier B2 3 Circuit 1 4 Channel 3 input for amplifier B2 3 Circuit 1 5 Channel 3 input for amplifier B2 3 Circuit 1 5 Channel 3 input for amplifier B2 3 Circuit 1 5 Channel 3	1	OUTC1	Circuit 3	Output of amplifier C1
4 OUTA1 Circuit 3 Output of amplifier A1 5.25 V1+, V2+ Circuit 4 Positive Power Supply #1 and #2 6 ENT 26 ENT 27 Grout 2 Discrete reads (active low) with internal pull-down resistor. A logic High puts device into power-down mode leaving the logic circuity active. This state is not recommended for logic control where more than one MUX-amp share the same video output line. 7 HI21 Circuit 2 Output disable (active high) with internal pull-down resistor. A logic high puts the output in a high impedance state. Use this state when more than one MUX-amp share the same video output line. 8 INOC1 Circuit 1 Channel 0 input for amplifier C1 9 IN081 Circuit 1 Channel 0 input for amplifier B1 10 IN0A1 Circuit 1 Channel 0 input for amplifier A1 11 GND Circuit 4A Ground pin for amplifier A1 12 IN1A1 Circuit 1 Channel 1 input for amplifier B2 14 IN282 Circuit 1 Channel 2 input for amplifier B2 14 IN282 Circuit 1 Channel 2 input for amplifier B2 15 GND Circuit 4B Ground pin for amplifier C2 16 IN3A2 Circuit 1 Channel 3 input for amplifier B2 17 IN3B2 Circuit 1 Channel 3 input for amplifier B2 18 IN3C2 Circuit 1 Channel 3 input for amplifier B2 19 47 S1-2, S1-1 Circuit 2 Channel 3 input for amplifier B2 19 47 S1-2, S1-1 Circuit 2 Channel 3 input for amplifier B2 19 47 S1-2, S1-1 Circuit 2 Channel 3 input for amplifier B2 20 OUTB2 Circuit 1 Channel 3 input for amplifier B2 21 OUTC2 Circuit 2 Channel 3 input for amplifier B2 22 OUTB2 Circuit 1 Channel 3 input for amplifier B2 23 IN1B2 Circuit 1 Channel 3 input for amplifier B2 24 OUTA2 Circuit 1 Channel 3 input for amplifier B2 25 INNOB2 Circuit 1 Channel 3 input for amplifier B2 26 INNOB2 Circuit 1 Channel 3 input for amplifier B2 27 OUTB2 Circuit 1 Channel 0 input for amplifier B2 28 INNOB2 Circuit 1 Channel 0 input for amplifier B2 39 INNOB2 Circuit 1 Channel 0 input for amplifier B2 30 INNOB2 Circuit 1 Channel 0 input for amplifier B2 31 GND Circuit 4B Ground pin for amplifier B2 32 INNA2 Circuit 1 Channel 1 input for amplifier B2 33 INNOB2 Circuit 1 Channel 1 input for amplifi	2	OUTB1	Circuit 3	Output of amplifier B1
S. 25	3, 23	V1-, V2-	Circuit 4A	Negative power supply #1 and #2
Beauty Circuit 2 Device enable (active low) with internal pull-down resistor. A logic High puts device into power-down mode leaving the logic circuity active. This state is not recommended for logic control where more with the part of the p	4	OUTA1	Circuit 3	Output of amplifier A1
mode leaving the logic circuitry active. This state is not recommended for logic control where more than one MUX-amp share the same video output line. 7 HIZ1 Circuit 2 Output disable (active high) with internal pull-down resistor. A logic high puts the output in a high impediance state. Use this state when more than one MUX-amp share the same video output line. 8 INOC1 Circuit 1 Channel 0 input for amplifier C1 9 INOB1 Circuit 1 Channel 0 input for amplifier A1 10 INOA1 Circuit 1 Channel 1 input for amplifier A1 11 GND Circuit 4A Ground pin for amplifier A1 12 IN11A1 Circuit 1 Channel 2 input for amplifier B2 13 IN2B2 Circuit 1 Channel 2 input for amplifier C2 15 GND Circuit 4B Ground pin for amplifier C2 16 IN3A2 Circuit 1 Channel 3 input for amplifier B2 18 IN3C2 Circuit 1 Channel 3 input for amplifier B2 18 IN3C2 Circuit 1 Channel 3 input for amplifier B2 19 47 S1-2, S1-1 Circuit 2 Channel 3 input for amplifier B2 19 47 S1-2, S1-1 Circuit 2 Channel 3 input for amplifier B2 19 47 S1-2, S1-1 Circuit 2 Channel asleet pin MSB (binary logic code) for amplifiers A2, B2, C2 (S1-2) and A1, B1, C1 (S1-1) 20, 48 S0-2, S0-1 Circuit 2 Channel select pin MSB (binary logic code) for amplifiers A2, B2, C2 (S0-2) and A1, B1, C1 (S0-1) 21 OUTC2 Circuit 2 Output of amplifier B2 24 OUTB2 Circuit 1 Channel 6 input for amplifier A2 28 INOC2 Circuit 1 Channel 6 input for amplifier A2 30 IN18A2 Circuit 1 Channel 0 input for amplifier B2 31 GND Circuit 4B Ground pin for amplifier B2 33 IN18A2 Circuit 1 Channel 0 input for amplifier B2 34 IN1C2 Circuit 1 Channel 0 input for amplifier B2 35 GND Circuit 4B Ground pin for amplifier B2 36 INDA2 Circuit 1 Channel 0 input for amplifier B2 37 IN18H Circuit 1 Channel 1 input for amplifier B2 38 IN1C1 Circuit 1 Channel 1 input for amplifier B1 39 GND Circuit 4A Ground pin for amplifier B1 40 IN2A1 Circuit 1 Channel 1 input for amplifier B1 41 IN2B1 Circuit 1 Channel 2 input for amplifier C1 42 IN2C1 Circuit 1 Channel 2 input for amplifier C1 43 GND Circuit 4A G	5, 25	V1+, V2+	Circuit 4A	Positive Power Supply #1 and #2
than one MUX-amp share the same video output line. 7 HIZ1 Circuit 2 Output disable (active high) with internal pull-down resistor. A logic high puts the output in a high impedance state. Use this state when more than one MUX-amp share the same video output line. 8 INOC1 Circuit 1 Channel 0 input for amplifier C1 9 INOB1 Circuit 1 Channel 0 input for amplifier B1 10 INOA1 Circuit 4 Ground pin for amplifier A1 11 GND Circuit 4A Ground pin for amplifier A1 12 IN1A1 Circuit 1 Channel 2 input for amplifier A1 13 IN2B2 Circuit 1 Channel 2 input for amplifier B2 14 IN2C2 Circuit 1 Channel 2 input for amplifier B2 15 GND Circuit 4B Ground pin for amplifier C2 16 IN3A2 Circuit 1 Channel 3 input for amplifier B2 17 IN3B2 Circuit 1 Channel 3 input for amplifier B2 18 IN3C2 Circuit 1 Channel 3 input for amplifier B2 19 47 S1-2, S1-1 Circuit 2 Channel 3 input for amplifier B2 19 48 S0-2, S0-1 Circuit 2 Channel select pin MS8 (binary logic code) for amplifiers A2, B2, C2 (S1-2) and A1, B1, C1 (S1-1) 20 48 S0-2, S0-1 Circuit 2 Channel select pin LSB (binary logic code) for amplifiers A2, B2, C2 (S0-2) and A1, B1, C1 (S0-1) 21 OUTC2 Circuit 2 Output of amplifier B2 24 OUTS2 Circuit 1 Output of amplifier B2 25 INOB2 Circuit 1 Channel 0 input for amplifier B2 36 INOA2 Circuit 1 Channel 0 input for amplifier B2 37 INIB1 Circuit 1 Channel 0 input for amplifier B2 38 INIB2 Circuit 1 Channel 0 input for amplifier B2 39 INOB2 Circuit 1 Channel 0 input for amplifier B2 30 INOA2 Circuit 1 Channel 0 input for amplifier B2 31 GND Circuit 4B Ground pin for amplifier B2 32 INIA2 Circuit 1 Channel 0 input for amplifier B2 33 INIB2 Circuit 1 Channel 0 input for amplifier B2 34 INIB1 Circuit 1 Channel 0 input for amplifier B2 35 GND Circuit 4B Ground pin for amplifier B1 36 INIA2 Circuit 1 Channel 1 input for amplifier B1 37 INIB1 Circuit 1 Channel 1 input for amplifier B1 38 INITC1 Circuit 1 Channel 1 input for amplifier B1 40 INIA21 Circuit 1 Channel 2 input for amplifier C1 41 INIA31 Circuit 1 Channel 2 inp	6	EN1	Circuit 2	
impedance state. Use this state when more than one MUX-amp share the same video output line. Note	26	EN2		
Rincol	7		Circuit 2	
9 INOB1 Circuit 1 Channel 0 input for amplifier B1 10 INOA1 Circuit 1 Channel 0 input for amplifier A1 11 GND Circuit 4A Ground pin for amplifier A1 12 IN1A1 Circuit 1 Channel 1 input for amplifier A1 13 IN2B2 Circuit 1 Channel 2 input for amplifier B2 14 IN2C2 Circuit 1 Channel 2 input for amplifier C2 15 GND Circuit 4B Ground pin for amplifier C2 16 IN3A2 Circuit 1 Channel 3 input for amplifier C2 17 IN3B2 Circuit 1 Channel 3 input for amplifier B2 18 IN3C2 Circuit 1 Channel 3 input for amplifier B2 19 47 S1-2, S1-1 Circuit 2 Channel 3 input for amplifier B2 20 48 S0-2, S0-1 Circuit 2 Channel select pin MSB (binary logic code) for amplifiers A2, B2, C2 (S1-2) and A1, B1, C1 (S1-1) 21 OUTC2 Circuit 2 Channel select pin LSB (binary logic code) for amplifiers A2, B2, C2 (S0-2) and A1, B1, C1 (S0-1) 21 OUTC2 Circuit 2 Output of amplifier B2 24 OUTA2 Circuit 1 Output of amplifier B2 25 INOC2 Circuit 1 Channel 0 input for amplifier A2 26 INOC2 Circuit 1 Channel 0 input for amplifier B2 27 INOB2 Circuit 1 Channel 0 input for amplifier B2 30 INOA2 Circuit 1 Channel 0 input for amplifier B2 31 GND Circuit 4B Ground pin for amplifier B2 32 IN1A2 Circuit 1 Channel 1 input for amplifier B2 33 IN1B2 Circuit 1 Channel 1 input for amplifier B2 34 IN1C2 Circuit 1 Channel 1 input for amplifier B2 35 GND Circuit 4B Ground pin for amplifier B2 36 INDA2 Circuit 1 Channel 1 input for amplifier B2 37 IN1B1 Circuit 1 Channel 1 input for amplifier B2 38 IN1C1 Circuit 1 Channel 1 input for amplifier B2 39 GND Circuit 4B Ground pin for amplifier B1 40 IN2A1 Circuit 1 Channel 1 input for amplifier B1 41 IN2B1 Circuit 1 Channel 1 input for amplifier B1 42 IN2C1 Circuit 1 Channel 2 input for amplifier B1 43 GND Circuit 4A Ground pin for amplifier B1 44 IN3A1 Circuit 1 Channel 2 input for amplifier B1 45 IN3B1 Circuit 1 Channel 3 input for amplifier B1 46 IN3B1 Circuit 4 Channel 3 input for amplifier C1 47 IN3B1 Circuit 1 Channel 3 input for amplifier B1 48 IN3B1 Circuit 1 Channel 3 input for amplifier B1 49 IN3B1 Circuit 1 Channel 3 inpu	27	HIZ2		impedance state. Use this state when more than one MOX-amp share the same video output line.
10 INOA1 Circuit 1 Channel 0 input for amplifier A1 11 GND Circuit 4A Ground pin for amplifier A1 12 IN1A1 Circuit 1 Channel 1 input for amplifier A1 13 IN2B2 Circuit 1 Channel 2 input for amplifier B2 14 IN2C2 Circuit 1 Channel 2 input for amplifier C2 15 GND Circuit 4B Ground pin for amplifier C2 16 IN3A2 Circuit 1 Channel 3 input for amplifier C2 17 IN3B2 Circuit 1 Channel 3 input for amplifier B2 18 IN3C2 Circuit 1 Channel 3 input for amplifier B2 19, 47 S1-2, S1-1 Circuit 2 Channel 3 input for amplifier C2 19, 47 S1-2, S1-1 Circuit 2 Channel select pin MSB (binary logic code) for amplifiers A2, B2, C2 (S1-2) and A1, B1, C1 (S1-1) 20, 48 S0-2, S0-1 Circuit 2 Channel select pin LSB (binary logic code) for amplifiers A2, B2, C2 (S0-2) and A1, B1, C1 (S0-1) 21 OUTC2 Circuit 2 Output of amplifier C2 22 OUTB2 Circuit 1 Output of amplifier B2 24 OUTA2 Circuit 1 Output of amplifier B2 25 INOC2 Circuit 1 Channel 0 input for amplifier A2 26 INOB2 Circuit 1 Channel 0 input for amplifier A2 27 INDB2 Circuit 1 Channel 0 input for amplifier A2 30 INOA2 Circuit 1 Channel 0 input for amplifier B2 31 GND Circuit 4B Ground pin for amplifier A2 32 IN1A2 Circuit 1 Channel 1 input for amplifier B2 33 IN1B2 Circuit 1 Channel 1 input for amplifier B2 34 IN1C2 Circuit 1 Channel 1 input for amplifier B2 35 GND Circuit 4B Ground pin for amplifier B2 36 INAA2 Circuit 1 Channel 1 input for amplifier B2 37 IN1B1 Circuit 1 Channel 1 input for amplifier B2 38 IN1C1 Circuit 1 Channel 1 input for amplifier B2 39 GND Circuit 4A Ground pin for amplifier B1 40 INAA1 Circuit 1 Channel 1 input for amplifier B1 41 INAB1 Circuit 1 Channel 2 input for amplifier B1 42 INAC1 Circuit 4 Channel 2 input for amplifier B1 43 GND Circuit 4A Ground pin for amplifier B1 44 INAA1 Circuit 1 Channel 3 input for amplifier B1 45 INAB1 Circuit 4 Channel 3 input for amplifier B1 46 INAB1 Circuit 4 Channel 3 input for amplifier B1 47 INAB1 Circuit 4 Channel 3 input for amplifier B1 48 INAB1 Circuit 4 Channel 3 input for amplifier B1	8	IN0C1	Circuit 1	Channel 0 input for amplifier C1
111 GND Circuit 4A Ground pin for amplifier A1 12 IN1A1 Circuit 1 Channel 1 input for amplifier A1 13 IN2B2 Circuit 1 Channel 2 input for amplifier B2 14 IN2C2 Circuit 4 Channel 2 input for amplifier C2 15 GND Circuit 4B Ground pin for amplifier C2 16 IN3A2 Circuit 1 Channel 3 input for amplifier A2 17 IN3B2 Circuit 1 Channel 3 input for amplifier A2 18 IN3C2 Circuit 1 Channel 3 input for amplifier C2 19, 47 S1-2, S1-1 Circuit 2 Channel select pin MSB (binary logic code) for amplifiers A2, B2, C2 (S1-2) and A1, B1, C1 (S1-1) 20, 48 S0-2, S0-1 Circuit 2 Output of amplifier C2 21 OUTC2 Circuit 2 Output of amplifier B2 24 OUTA2 Circuit 1 Output of amplifier A2 28 IN0C2 Circuit 1 Channel 0 input for amplifier A2 29 IN0B2 Circuit 1 Channel 0 input for amplifier B2 30 INA2	9	IN0B1	Circuit 1	Channel 0 input for amplifier B1
12	10	IN0A1	Circuit 1	Channel 0 input for amplifier A1
13 IN2B2 Circuit 1 Channel 2 input for amplifier B2 14 IN2C2 Circuit 1 Channel 2 input for amplifier C2 15 GND Circuit 4B Ground pin for amplifier C2 16 IN3A2 Circuit 1 Channel 3 input for amplifier C2 17 IN3B2 Circuit 1 Channel 3 input for amplifier B2 18 IN3C2 Circuit 1 Channel 3 input for amplifier B2 19, 47 S1-2, S1-1 Circuit 2 Channel 3 input for amplifier C2 19, 47 S1-2, S1-1 Circuit 2 Channel select pin MSB (binary logic code) for amplifiers A2, B2, C2 (S1-2) and A1, B1, C1 (S1-1) 20, 48 S0-2, S0-1 Circuit 2 Channel select pin LSB (binary logic code) for amplifiers A2, B2, C2 (S0-2) and A1, B1, C1 (S0-1) 21 OUTC2 Circuit 2 Output of amplifier C2 22 OUTB2 Circuit 1 Output of amplifier B2 24 OUTA2 Circuit 1 Output of amplifier A2 28 INOC2 Circuit 1 Channel 0 input for amplifier B2 30 IN0A2 Circuit 1 Channel 0 input for amplifier B2 31 GND Circuit 4B Ground pin for amplifier A2 32 IN1A2 Circuit 1 Channel 0 input for amplifier A2 33 IN1B2 Circuit 1 Channel 1 input for amplifier A2 34 IN1C2 Circuit 1 Channel 1 input for amplifier B2 35 GND Circuit 4B Ground pin for amplifier B2 36 IN2A2 Circuit 1 Channel 1 input for amplifier B2 37 IN1B1 Circuit 4B Ground pin for amplifier B2 38 IN1C2 Circuit 1 Channel 1 input for amplifier B2 39 GND Circuit 4B Ground pin for amplifier B2 30 IN2A2 Circuit 1 Channel 1 input for amplifier B2 31 IN1B2 Circuit 1 Channel 1 input for amplifier B2 32 IN1A2 Circuit 1 Channel 1 input for amplifier B2 33 IN1B2 Circuit 1 Channel 1 input for amplifier B1 34 IN1C1 Circuit 1 Channel 2 input for amplifier B1 35 GND Circuit 4A Ground pin for amplifier C1 36 GND Circuit 4A Ground pin for amplifier C1 37 IN1B1 Circuit 1 Channel 2 input for amplifier C1 38 GND Circuit 4A Ground pin for amplifier C1 49 GND Circuit 1 Channel 2 input for amplifier C1 40 IN2A1 Circuit 1 Channel 2 input for amplifier C1 41 IN2B1 Circuit 1 Channel 2 input for amplifier C1 42 IN3A1 Circuit 1 Channel 3 input for amplifier C1	11	GND	Circuit 4A	Ground pin for amplifier A1
14 IN2C2 Circuit 1 Channel 2 input for amplifier C2 15 GND Circuit 4B Ground pin for amplifier C2 16 IN3A2 Circuit 1 Channel 3 input for amplifier A2 17 IN3B2 Circuit 1 Channel 3 input for amplifier B2 18 IN3C2 Circuit 1 Channel 3 input for amplifier C2 19, 47 S1-2, S1-1 Circuit 2 Channel select pin MSB (binary logic code) for amplifiers A2, B2, C2 (S1-2) and A1, B1, C1 (S1-1) 20, 48 S0-2, S0-1 Circuit 2 Channel select pin LSB (binary logic code) for amplifiers A2, B2, C2 (S0-2) and A1, B1, C1 (S0-1) 21 OUTC2 Circuit 2 Channel select pin LSB (binary logic code) for amplifiers A2, B2, C2 (S0-2) and A1, B1, C1 (S0-1) 22 OUTB2 Circuit 1 Output of amplifier B2 24 OUTA2 Circuit 1 Channel 0 input for amplifier A2 28 INOC2 Circuit 1 Channel 0 input for amplifier A2 29 IN0B2 Circuit 1 Channel 0 input for amplifier B2 30 IN0A2 Circuit 4 Channel 0 input for amplifier B2 31 GND Circuit 4B Ground pin for amplifier A2 32 IN1A2 Circuit 1 Channel 1 input for amplifier A2 33 IN1B2 Circuit 1 Channel 1 input for amplifier B2 34 IN1C2 Circuit 4 Channel 1 input for amplifier B2 35 GND Circuit 4B Ground pin for amplifier B2 36 IN2A2 Circuit 1 Channel 1 input for amplifier B2 37 IN1B1 Circuit 1 Channel 1 input for amplifier B2 38 IN1C1 Circuit 4B Ground pin for amplifier B2 39 GND Circuit 4B Ground pin for amplifier B1 40 IN2A1 Circuit 1 Channel 1 input for amplifier B1 41 IN2B1 Circuit 1 Channel 2 input for amplifier B1 42 IN2C1 Circuit 1 Channel 2 input for amplifier B1 43 IN3B1 Circuit 1 Channel 2 input for amplifier C1 44 IN3B1 Circuit 1 Channel 2 input for amplifier C1 45 IN3B1 Circuit 1 Channel 3 input for amplifier C1 46 IN3B1 Circuit 1 Channel 3 input for amplifier C1 47 Circuit 1 Channel 3 input for amplifier C1 48 IN3B1 Circuit 1 Channel 3 input for amplifier C1 49 IN3B1 Circuit 1 Channel 3 input for amplifier C1	12	IN1A1	Circuit 1	Channel 1 input for amplifier A1
15 GND Circuit 4B Ground pin for amplifier C2 16 IN3A2 Circuit 1 Channel 3 input for amplifier A2 17 IN3B2 Circuit 1 Channel 3 input for amplifier B2 18 IN3C2 Circuit 1 Channel 3 input for amplifier C2 19, 47 S1-2, S1-1 Circuit 2 Channel select pin MSB (binary logic code) for amplifiers A2, B2, C2 (S1-2) and A1, B1, C1 (S1-1) 20, 48 S0-2, S0-1 Circuit 2 Channel select pin LSB (binary logic code) for amplifiers A2, B2, C2 (S0-2) and A1, B1, C1 (S0-1) 21 OUTC2 Circuit 2 Output of amplifier C2 22 OUTB2 Circuit 1 Output of amplifier B2 24 OUTA2 Circuit 1 Output of amplifier A2 28 IN0C2 Circuit 1 Channel 0 input for amplifier A2 29 IN0B2 Circuit 1 Channel 0 input for amplifier B2 30 IN0A2 Circuit 1 Channel 0 input for amplifier C2 31 GND Circuit 4B Ground pin for amplifier A2 32 IN1A2 Circuit 1 Channel 1 input for amplifier A2 33 IN1B2 Circuit 1 Channel 1 input for amplifier B2 34 IN1C2 Circuit 1 Channel 1 input for amplifier B2 35 GND Circuit 4B Ground pin for amplifier B2 36 IN2A2 Circuit 1 Channel 1 input for amplifier B2 37 IN1B1 Circuit 1 Channel 2 input for amplifier B2 38 IN1C1 Circuit 4 Channel 1 input for amplifier B2 39 GND Circuit 4B Ground pin for amplifier B2 40 IN2A1 Circuit 1 Channel 1 input for amplifier B2 41 IN1B1 Circuit 1 Channel 2 input for amplifier B1 42 IN2A1 Circuit 1 Channel 2 input for amplifier B1 43 IN1C1 Circuit 4 Channel 2 input for amplifier B1 44 IN2B1 Circuit 1 Channel 2 input for amplifier B1 45 IN3B1 Circuit 1 Channel 3 input for amplifier C1 46 IN3A1 Circuit 1 Channel 3 input for amplifier C1	13	IN2B2	Circuit 1	Channel 2 input for amplifier B2
16 IN3A2 Circuit 1 Channel 3 input for amplifier A2 17 IN3B2 Circuit 1 Channel 3 input for amplifier B2 18 IN3C2 Circuit 1 Channel 3 input for amplifier C2 19, 47 S1-2, S1-1 Circuit 2 Channel select pin MSB (binary logic code) for amplifiers A2, B2, C2 (S1-2) and A1, B1, C1 (S1-1) 20, 48 S0-2, S0-1 Circuit 2 Channel select pin MSB (binary logic code) for amplifiers A2, B2, C2 (S0-2) and A1, B1, C1 (S0-1) 21 OUTC2 Circuit 2 Output of amplifier C2 22 OUTB2 Circuit 1 Output of amplifier B2 24 OUTA2 Circuit 1 Output of amplifier A2 28 INOC2 Circuit 1 Channel 0 input for amplifier A2 29 IN0B2 Circuit 1 Channel 0 input for amplifier B2 30 IN0A2 Circuit 1 Channel 0 input for amplifier B2 31 GND Circuit 4B Ground pin for amplifier A2 32 IN1A2 Circuit 1 Channel 1 input for amplifier A2 33 IN1B2 Circuit 1 Channel 1 input for amplifier B2 34 IN1C2 Circuit 1 Channel 1 input for amplifier B2 35 GND Circuit 4B Ground pin for amplifier B2 36 IN2A2 Circuit 1 Channel 1 input for amplifier B2 37 IN1B1 Circuit 1 Channel 2 input for amplifier B2 38 IN1C1 Circuit 1 Channel 2 input for amplifier B4 40 IN2A1 Circuit 1 Channel 1 input for amplifier B1 40 IN2A1 Circuit 1 Channel 2 input for amplifier B1 41 IN2B1 Circuit 1 Channel 2 input for amplifier B1 42 IN2C1 Circuit 1 Channel 2 input for amplifier B1 43 GND Circuit 4A Ground pin for amplifier B1 44 IN2B1 Circuit 1 Channel 2 input for amplifier B1 45 IN3B1 Circuit 1 Channel 3 input for amplifier C1	14	IN2C2	Circuit 1	Channel 2 input for amplifier C2
17 IN3B2 Circuit 1 Channel 3 input for amplifier B2 18 IN3C2 Circuit 1 Channel 3 input for amplifier C2 19, 47 S1-2, S1-1 Circuit 2 Channel select pin MSB (binary logic code) for amplifiers A2, B2, C2 (S1-2) and A1, B1, C1 (S1-1) 20, 48 S0-2, S0-1 Circuit 2 Channel select pin LSB (binary logic code) for amplifiers A2, B2, C2 (S0-2) and A1, B1, C1 (S0-1) 21 OUTC2 Circuit 1 Output of amplifier B2 22 OUTB2 Circuit 1 Output of amplifier B2 24 OUTA2 Circuit 1 Output of amplifier A2 28 IN0C2 Circuit 1 Channel 0 input for amplifier A2 29 IN0B2 Circuit 1 Channel 0 input for amplifier B2 30 IN0A2 Circuit 1 Channel 0 input for amplifier B2 31 GND Circuit 4B Ground pin for amplifier A2 32 IN1A2 Circuit 1 Channel 1 input for amplifier A2 33 IN1B2 Circuit 1 Channel 1 input for amplifier B2 34 IN1C2 Circuit 1 Channel 1 input for amplifier B2 35 GND Circuit 4B Ground pin for amplifier B2 36 IN2A2 Circuit 1 Channel 1 input for amplifier B2 37 IN1B1 Circuit 1 Channel 2 input for amplifier B2 38 IN1C1 Circuit 1 Channel 2 input for amplifier B1 39 GND Circuit 4A Ground pin for amplifier B1 40 IN2A1 Circuit 1 Channel 1 input for amplifier B1 41 IN2B1 Circuit 1 Channel 2 input for amplifier B1 42 IN2C1 Circuit 1 Channel 2 input for amplifier B1 43 GND Circuit 4A Ground pin for amplifier B1 44 IN2B1 Circuit 1 Channel 2 input for amplifier B1 45 IN3B1 Circuit 1 Channel 2 input for amplifier B1 46 IN2A1 Circuit 1 Channel 2 input for amplifier B1 47 Circuit 1 Channel 2 input for amplifier B1 48 GND Circuit 4A Ground pin for amplifier B1 49 GND Circuit 4A Ground pin for amplifier B1 40 IN2A1 Circuit 1 Channel 2 input for amplifier B1 41 IN2B1 Circuit 1 Channel 3 input for amplifier C1 43 GND Circuit 4A Ground pin for amplifier B1	15	GND	Circuit 4B	Ground pin for amplifier C2
18 IN3C2 Circuit 1 Channel 3 input for amplifier C2 19, 47 S1-2, S1-1 Circuit 2 Channel select pin MSB (binary logic code) for amplifiers A2, B2, C2 (S1-2) and A1, B1, C1 (S1-1) 20, 48 S0-2, S0-1 Circuit 2 Channel select pin LSB (binary logic code) for amplifiers A2, B2, C2 (S0-2) and A1, B1, C1 (S0-1) 21 OUTC2 Circuit 2 Output of amplifier C2 22 OUTB2 Circuit 1 Output of amplifier B2 24 OUTA2 Circuit 1 Output of amplifier A2 28 INOC2 Circuit 1 Channel 0 input for amplifier A2 29 IN0B2 Circuit 1 Channel 0 input for amplifier B2 30 IN0A2 Circuit 1 Channel 0 input for amplifier C2 31 GND Circuit 4B Ground pin for amplifier A2 32 IN1A2 Circuit 1 Channel 1 input for amplifier B2 33 IN1B2 Circuit 1 Channel 1 input for amplifier B2 34 IN1C2 Circuit 1 Channel 1 input for amplifier B2 35 GND Circuit 4B Ground pin for amplifier B2 36 IN2A2 Circuit 1 Channel 1 input for amplifier A2 37 IN1B1 Circuit 1 Channel 2 input for amplifier A2 38 IN1C1 Circuit 1 Channel 1 input for amplifier B1 39 GND Circuit 4A Circuit 1 Channel 1 input for amplifier B1 40 IN2A1 Circuit 1 Channel 2 input for amplifier C1 41 IN2B1 Circuit 1 Channel 2 input for amplifier C1 43 GND Circuit 4A Ground pin for amplifier C1 44 IN3A1 Circuit 1 Channel 3 input for amplifier C1 45 IN3B1 Circuit 1 Channel 3 input for amplifier C1 46 IN3A1 Circuit 1 Channel 3 input for amplifier C1	16	IN3A2	Circuit 1	Channel 3 input for amplifier A2
19, 47 S1-2, S1-1 Circuit 2 Channel select pin MSB (binary logic code) for amplifiers A2, B2, C2 (S1-2) and A1, B1, C1 (S1-1) 20, 48 S0-2, S0-1 Circuit 2 Channel select pin LSB (binary logic code) for amplifiers A2, B2, C2 (S0-2) and A1, B1, C1 (S0-1) 21 OUTC2 Circuit 2 Output of amplifier C2 22 OUTB2 Circuit 1 Output of amplifier B2 24 OUTA2 Circuit 1 Output of amplifier A2 28 INOC2 Circuit 1 Channel 0 input for amplifier A2 29 INOB2 Circuit 1 Channel 0 input for amplifier B2 30 INOA2 Circuit 1 Channel 0 input for amplifier C2 31 GND Circuit 4B Ground pin for amplifier A2 32 IN1A2 Circuit 1 Channel 1 input for amplifier A2 33 IN1B2 Circuit 1 Channel 1 input for amplifier B2 34 IN1C2 Circuit 1 Channel 1 input for amplifier B2 35 GND Circuit 4B Ground pin for amplifier B2 36 IN2A2 Circuit 1 Channel 1 input for amplifier B2 37 IN1B1 Circuit 1 Channel 2 input for amplifier A2 38 IN1C1 Circuit 1 Channel 1 input for amplifier B2 40 IN2A2 Circuit 1 Channel 1 input for amplifier B1 41 IN2B1 Circuit 1 Channel 1 input for amplifier B1 42 IN2C1 Circuit 1 Channel 2 input for amplifier B1 43 GND Circuit 4A Ground pin for amplifier B1 44 IN2B1 Circuit 1 Channel 2 input for amplifier B1 45 IN3B1 Circuit 1 Channel 2 input for amplifier C1 46 IN3A1 Circuit 1 Channel 3 input for amplifier C1 47 Ground pin for amplifier B1 48 IN3A1 Circuit 1 Channel 3 input for amplifier B1 49 IN3A1 Circuit 1 Channel 3 input for amplifier C1	17	IN3B2	Circuit 1	Channel 3 input for amplifier B2
20, 48 S0-2, S0-1 Circuit 2 Channel select pin LSB (binary logic code) for amplifiers A2, B2, C2 (S0-2) and A1, B1, C1 (S0-1) 21 OUTC2 Circuit 2 Output of amplifier C2 22 OUTB2 Circuit 1 Output of amplifier B2 24 OUTA2 Circuit 1 Output of amplifier A2 28 INOC2 Circuit 1 Channel 0 input for amplifier A2 29 INOB2 Circuit 1 Channel 0 input for amplifier B2 30 INOA2 Circuit 1 Channel 0 input for amplifier C2 31 GND Circuit 4B Ground pin for amplifier A2 32 IN1A2 Circuit 1 Channel 1 input for amplifier B2 33 IN1B2 Circuit 1 Channel 1 input for amplifier B2 34 IN1C2 Circuit 1 Channel 1 input for amplifier B2 35 GND Circuit 4B Ground pin for amplifier B2 36 IN2A2 Circuit 1 Channel 1 input for amplifier B2 37 IN1B1 Circuit 1 Channel 2 input for amplifier B1 38 IN1C1 Circuit 1 Channel 1 input for amplifier B1 40 IN2A1 Circuit 1 Channel 1 input for amplifier B1 41 IN2B1 Circuit 1 Channel 2 input for amplifier B1 42 IN2C1 Circuit 1 Channel 2 input for amplifier B1 43 GND Circuit 4A Ground pin for amplifier B1 44 IN3A1 Circuit 1 Channel 2 input for amplifier C1 43 GND Circuit 4A Ground pin for amplifier C1 44 IN3A1 Circuit 1 Channel 2 input for amplifier C1 45 IN3B1 Circuit 1 Channel 3 input for amplifier C1 46 IN3B1 Circuit 1 Channel 3 input for amplifier B1	18	IN3C2	Circuit 1	Channel 3 input for amplifier C2
21 OUTC2 Circuit 2 Output of amplifier C2 22 OUTB2 Circuit 1 Output of amplifier B2 24 OUTA2 Circuit 1 Output of amplifier B2 28 INOC2 Circuit 1 Channel 0 input for amplifier A2 29 INOB2 Circuit 1 Channel 0 input for amplifier B2 30 INOA2 Circuit 1 Channel 0 input for amplifier C2 31 GND Circuit 4B Ground pin for amplifier A2 32 IN1A2 Circuit 1 Channel 1 input for amplifier A2 33 IN1B2 Circuit 1 Channel 1 input for amplifier B2 34 IN1C2 Circuit 1 Channel 1 input for amplifier B2 35 GND Circuit 4B Ground pin for amplifier B2 36 IN2A2 Circuit 1 Channel 1 input for amplifier B2 37 IN1B1 Circuit 1 Channel 2 input for amplifier B1 38 IN1C1 Circuit 1 Channel 1 input for amplifier B1 39 GND Circuit 4A Ground pin for amplifier B1 40 IN2A1 Circuit 1 Channel 2 input for amplifier B1 41 IN2B1 Circuit 1 Channel 2 input for amplifier B1 42 IN2C1 Circuit 1 Channel 2 input for amplifier B1 43 GND Circuit 4A Ground pin for amplifier B1 44 IN3A1 Circuit 1 Channel 2 input for amplifier B1 45 IN3B1 Circuit 1 Channel 2 input for amplifier C1 46 IN3A1 Circuit 1 Channel 2 input for amplifier B1 47 IN3A1 Circuit 1 Channel 2 input for amplifier B1 48 IN3A1 Circuit 1 Channel 3 input for amplifier C1 49 IN3A1 Circuit 1 Channel 3 input for amplifier C1	19, 47	S1-2, S1-1	Circuit 2	Channel select pin MSB (binary logic code) for amplifiers A2, B2, C2 (S1-2) and A1, B1, C1 (S1-1)
22 OUTB2 Circuit 1 Output of amplifier B2 24 OUTA2 Circuit 1 Output of amplifier A2 28 INOC2 Circuit 1 Channel 0 input for amplifier A2 29 INOB2 Circuit 1 Channel 0 input for amplifier B2 30 INOA2 Circuit 1 Channel 0 input for amplifier C2 31 GND Circuit 4B Ground pin for amplifier A2 32 IN1A2 Circuit 1 Channel 1 input for amplifier A2 33 IN1B2 Circuit 1 Channel 1 input for amplifier B2 34 IN1C2 Circuit 1 Channel 1 input for amplifier B2 35 GND Circuit 4B Ground pin for amplifier B2 36 IN2A2 Circuit 1 Channel 1 input for amplifier B2 37 IN1B1 Circuit 1 Channel 2 input for amplifier B1 38 IN1C1 Circuit 1 Channel 1 input for amplifier B1 39 GND Circuit 4A Ground pin for amplifier B1 40 IN2A1 Circuit 1 Channel 2 input for amplifier B1 41 IN2B1 Circuit 1 Channel 2 input for amplifier B1 42 IN2C1 Circuit 1 Channel 2 input for amplifier B1 43 GND Circuit 4A Ground pin for amplifier B1 44 IN3A1 Circuit 1 Channel 2 input for amplifier C1 45 IN3B1 Circuit 1 Channel 3 input for amplifier C1 46 IN3A1 Circuit 1 Channel 3 input for amplifier C1 47 GND Circuit 4A Ground pin for amplifier C1 48 IN3A1 Circuit 1 Channel 3 input for amplifier C1 49 IN3B1 Circuit 1 Channel 3 input for amplifier B1	20, 48	S0-2, S0-1	Circuit 2	Channel select pin LSB (binary logic code) for amplifiers A2, B2, C2 (S0-2) and A1, B1, C1 (S0-1)
24 OUTA2 Circuit 1 Output of amplifier A2 28 INOC2 Circuit 1 Channel 0 input for amplifier A2 29 INOB2 Circuit 1 Channel 0 input for amplifier B2 30 INOA2 Circuit 1 Channel 0 input for amplifier C2 31 GND Circuit 4B Ground pin for amplifier A2 32 IN1A2 Circuit 1 Channel 1 input for amplifier A2 33 IN1B2 Circuit 1 Channel 1 input for amplifier B2 34 IN1C2 Circuit 1 Channel 1 input for amplifier B2 35 GND Circuit 4B Ground pin for amplifier B2 36 IN2A2 Circuit 1 Channel 1 input for amplifier B2 37 IN1B1 Circuit 1 Channel 2 input for amplifier B1 38 IN1C1 Circuit 1 Channel 1 input for amplifier B1 39 GND Circuit 4A Ground pin for amplifier B1 40 IN2A1 Circuit 1 Channel 2 input for amplifier B1 41 IN2B1 Circuit 1 Channel 2 input for amplifier B1 42 IN2C1 Circuit 1 Channel 2 input for amplifier C1 43 GND Circuit 4A Ground pin for amplifier C1 44 IN3A1 Circuit 1 Channel 2 input for amplifier C1 45 IN3B1 Circuit 1 Channel 3 input for amplifier A1 46 IN3B1 Circuit 1 Channel 3 input for amplifier A1 47 IN3B1 Circuit 1 Channel 3 input for amplifier C1 48 IN3B1 Circuit 1 Channel 3 input for amplifier B1	21	OUTC2	Circuit 2	Output of amplifier C2
28 INOC2 Circuit 1 Channel 0 input for amplifier A2 29 INOB2 Circuit 1 Channel 0 input for amplifier B2 30 INOA2 Circuit 1 Channel 0 input for amplifier C2 31 GND Circuit 4B Ground pin for amplifier A2 32 IN1A2 Circuit 1 Channel 1 input for amplifier A2 33 IN1B2 Circuit 1 Channel 1 input for amplifier B2 34 IN1C2 Circuit 1 Channel 1 input for amplifier B2 35 GND Circuit 4B Ground pin for amplifier B2 36 IN2A2 Circuit 1 Channel 2 input for amplifier A2 37 IN1B1 Circuit 1 Channel 1 input for amplifier B1 38 IN1C1 Circuit 1 Channel 1 input for amplifier B1 39 GND Circuit 4A Ground pin for amplifier B1 40 IN2A1 Circuit 1 Channel 2 input for amplifier A1 41 IN2B1 Circuit 1 Channel 2 input for amplifier B1 42 IN2C1 Circuit 1 Channel 2 input for amplifier B1 43 GND Circuit 4A Ground pin for amplifier B1 44 IN3A1 Circuit 1 Channel 2 input for amplifier B1 45 IN3B1 Circuit 1 Channel 3 input for amplifier C1	22	OUTB2	Circuit 1	Output of amplifier B2
29 IN0B2 Circuit 1 Channel 0 input for amplifier B2 30 IN0A2 Circuit 1 Channel 0 input for amplifier C2 31 GND Circuit 4B Ground pin for amplifier A2 32 IN1A2 Circuit 1 Channel 1 input for amplifier A2 33 IN1B2 Circuit 1 Channel 1 input for amplifier B2 34 IN1C2 Circuit 1 Channel 1 input for amplifier C2 35 GND Circuit 4B Ground pin for amplifier B2 36 IN2A2 Circuit 1 Channel 2 input for amplifier A2 37 IN1B1 Circuit 1 Channel 1 input for amplifier B1 38 IN1C1 Circuit 1 Channel 1 input for amplifier B1 40 IN2A1 Circuit 1 Channel 2 input for amplifier B1 40 IN2A1 Circuit 1 Channel 2 input for amplifier B1 41 IN2B1 Circuit 1 Channel 2 input for amplifier B1 42 IN2C1 Circuit 1 Channel 2 input for amplifier C1 43 GND Circuit 4A Ground pin for amplifier B1 44 IN3A1 Circuit 1 Channel 2 input for amplifier C1 45 IN3B1 Circuit 1 Channel 3 input for amplifier C1	24	OUTA2	Circuit 1	Output of amplifier A2
30 IN0A2 Circuit 1 Channel 0 input for amplifier C2 31 GND Circuit 4B Ground pin for amplifier A2 32 IN1A2 Circuit 1 Channel 1 input for amplifier A2 33 IN1B2 Circuit 1 Channel 1 input for amplifier B2 34 IN1C2 Circuit 1 Channel 1 input for amplifier C2 35 GND Circuit 4B Ground pin for amplifier B2 36 IN2A2 Circuit 1 Channel 2 input for amplifier A2 37 IN1B1 Circuit 1 Channel 1 input for amplifier B1 38 IN1C1 Circuit 1 Channel 1 input for amplifier C1 39 GND Circuit 4A Ground pin for amplifier B1 40 IN2A1 Circuit 1 Channel 2 input for amplifier B1 41 IN2B1 Circuit 1 Channel 2 input for amplifier B1 42 IN2C1 Circuit 1 Channel 2 input for amplifier C1 43 GND Circuit 4A Ground pin for amplifier C1 44 IN3A1 Circuit 1 Channel 3 input for amplifier C1 45 IN3B1 Circuit 1 Channel 3 input for amplifier A1	28	IN0C2	Circuit 1	Channel 0 input for amplifier A2
31 GND Circuit 4B Ground pin for amplifier A2 32 IN1A2 Circuit 1 Channel 1 input for amplifier A2 33 IN1B2 Circuit 1 Channel 1 input for amplifier B2 34 IN1C2 Circuit 1 Channel 1 input for amplifier C2 35 GND Circuit 4B Ground pin for amplifier B2 36 IN2A2 Circuit 1 Channel 2 input for amplifier A2 37 IN1B1 Circuit 1 Channel 1 input for amplifier B1 38 IN1C1 Circuit 1 Channel 1 input for amplifier C1 39 GND Circuit 4A Ground pin for amplifier B1 40 IN2A1 Circuit 1 Channel 2 input for amplifier B1 41 IN2B1 Circuit 1 Channel 2 input for amplifier B1 42 IN2C1 Circuit 1 Channel 2 input for amplifier C1 43 GND Circuit 4A Ground pin for amplifier C1 44 IN3A1 Circuit 1 Channel 3 input for amplifier C1	29	IN0B2	Circuit 1	Channel 0 input for amplifier B2
32 IN1A2 Circuit 1 Channel 1 input for amplifier A2 33 IN1B2 Circuit 1 Channel 1 input for amplifier B2 34 IN1C2 Circuit 1 Channel 1 input for amplifier C2 35 GND Circuit 4B Ground pin for amplifier B2 36 IN2A2 Circuit 1 Channel 2 input for amplifier A2 37 IN1B1 Circuit 1 Channel 1 input for amplifier B1 38 IN1C1 Circuit 1 Channel 1 input for amplifier C1 39 GND Circuit 4A Ground pin for amplifier B1 40 IN2A1 Circuit 1 Channel 2 input for amplifier A1 41 IN2B1 Circuit 1 Channel 2 input for amplifier B1 42 IN2C1 Circuit 1 Channel 2 input for amplifier C1 43 GND Circuit 4A Ground pin for amplifier C1 44 IN3A1 Circuit 1 Channel 3 input for amplifier C1 45 IN3B1 Circuit 1 Channel 3 input for amplifier B1	30	IN0A2	Circuit 1	Channel 0 input for amplifier C2
33 IN1B2 Circuit 1 Channel 1 input for amplifier B2 34 IN1C2 Circuit 1 Channel 1 input for amplifier C2 35 GND Circuit 4B Ground pin for amplifier B2 36 IN2A2 Circuit 1 Channel 2 input for amplifier A2 37 IN1B1 Circuit 1 Channel 1 input for amplifier B1 38 IN1C1 Circuit 1 Channel 1 input for amplifier C1 39 GND Circuit 4A Ground pin for amplifier B1 40 IN2A1 Circuit 1 Channel 2 input for amplifier A1 41 IN2B1 Circuit 1 Channel 2 input for amplifier B1 42 IN2C1 Circuit 1 Channel 2 input for amplifier C1 43 GND Circuit 4A Ground pin for amplifier C1 44 IN3A1 Circuit 1 Channel 3 input for amplifier C1 45 IN3B1 Circuit 1 Channel 3 input for amplifier B1	31	GND	Circuit 4B	Ground pin for amplifier A2
34 IN1C2 Circuit 1 Channel 1 input for amplifier C2 35 GND Circuit 4B Ground pin for amplifier B2 36 IN2A2 Circuit 1 Channel 2 input for amplifier A2 37 IN1B1 Circuit 1 Channel 1 input for amplifier B1 38 IN1C1 Circuit 1 Channel 1 input for amplifier C1 39 GND Circuit 4A Ground pin for amplifier B1 40 IN2A1 Circuit 1 Channel 2 input for amplifier A1 41 IN2B1 Circuit 1 Channel 2 input for amplifier B1 42 IN2C1 Circuit 1 Channel 2 input for amplifier C1 43 GND Circuit 4A Ground pin for amplifier C1 44 IN3A1 Circuit 1 Channel 3 input for amplifier C1 45 IN3B1 Circuit 1 Channel 3 input for amplifier B1	32	IN1A2	Circuit 1	Channel 1 input for amplifier A2
35 GND Circuit 4B Ground pin for amplifier B2 36 IN2A2 Circuit 1 Channel 2 input for amplifier A2 37 IN1B1 Circuit 1 Channel 1 input for amplifier B1 38 IN1C1 Circuit 1 Channel 1 input for amplifier C1 39 GND Circuit 4A Ground pin for amplifier B1 40 IN2A1 Circuit 1 Channel 2 input for amplifier A1 41 IN2B1 Circuit 1 Channel 2 input for amplifier B1 42 IN2C1 Circuit 1 Channel 2 input for amplifier C1 43 GND Circuit 4A Ground pin for amplifier C1 44 IN3A1 Circuit 1 Channel 3 input for amplifier C1 45 IN3B1 Circuit 1 Channel 3 input for amplifier B1	33	IN1B2	Circuit 1	Channel 1 input for amplifier B2
36 IN2A2 Circuit 1 Channel 2 input for amplifier A2 37 IN1B1 Circuit 1 Channel 1 input for amplifier B1 38 IN1C1 Circuit 1 Channel 1 input for amplifier C1 39 GND Circuit 4A Ground pin for amplifier B1 40 IN2A1 Circuit 1 Channel 2 input for amplifier A1 41 IN2B1 Circuit 1 Channel 2 input for amplifier B1 42 IN2C1 Circuit 1 Channel 2 input for amplifier C1 43 GND Circuit 4A Ground pin for amplifier C1 44 IN3A1 Circuit 1 Channel 3 input for amplifier B1 45 IN3B1 Circuit 1 Channel 3 input for amplifier B1	34	IN1C2	Circuit 1	Channel 1 input for amplifier C2
37 IN1B1 Circuit 1 Channel 1 input for amplifier B1 38 IN1C1 Circuit 1 Channel 1 input for amplifier C1 39 GND Circuit 4A Ground pin for amplifier B1 40 IN2A1 Circuit 1 Channel 2 input for amplifier A1 41 IN2B1 Circuit 1 Channel 2 input for amplifier B1 42 IN2C1 Circuit 1 Channel 2 input for amplifier C1 43 GND Circuit 4A Ground pin for amplifier C1 44 IN3A1 Circuit 1 Channel 3 input for amplifier A1 45 IN3B1 Circuit 1 Channel 3 input for amplifier B1	35	GND	Circuit 4B	Ground pin for amplifier B2
38 IN1C1 Circuit 1 Channel 1 input for amplifier C1 39 GND Circuit 4A Ground pin for amplifier B1 40 IN2A1 Circuit 1 Channel 2 input for amplifier A1 41 IN2B1 Circuit 1 Channel 2 input for amplifier B1 42 IN2C1 Circuit 1 Channel 2 input for amplifier C1 43 GND Circuit 4A Ground pin for amplifier C1 44 IN3A1 Circuit 1 Channel 3 input for amplifier A1 45 IN3B1 Circuit 1 Channel 3 input for amplifier B1	36	IN2A2	Circuit 1	Channel 2 input for amplifier A2
39 GND Circuit 4A Ground pin for amplifier B1 40 IN2A1 Circuit 1 Channel 2 input for amplifier A1 41 IN2B1 Circuit 1 Channel 2 input for amplifier B1 42 IN2C1 Circuit 1 Channel 2 input for amplifier C1 43 GND Circuit 4A Ground pin for amplifier C1 44 IN3A1 Circuit 1 Channel 3 input for amplifier B1 45 IN3B1 Circuit 1 Channel 3 input for amplifier B1	37	IN1B1	Circuit 1	Channel 1 input for amplifier B1
40 IN2A1 Circuit 1 Channel 2 input for amplifier A1 41 IN2B1 Circuit 1 Channel 2 input for amplifier B1 42 IN2C1 Circuit 1 Channel 2 input for amplifier C1 43 GND Circuit 4A Ground pin for amplifier C1 44 IN3A1 Circuit 1 Channel 3 input for amplifier A1 45 IN3B1 Circuit 1 Channel 3 input for amplifier B1	38	IN1C1	Circuit 1	Channel 1 input for amplifier C1
41 IN2B1 Circuit 1 Channel 2 input for amplifier B1 42 IN2C1 Circuit 1 Channel 2 input for amplifier C1 43 GND Circuit 4A Ground pin for amplifier C1 44 IN3A1 Circuit 1 Channel 3 input for amplifier A1 45 IN3B1 Circuit 1 Channel 3 input for amplifier B1	39	GND	Circuit 4A	Ground pin for amplifier B1
42 IN2C1 Circuit 1 Channel 2 input for amplifier C1 43 GND Circuit 4A Ground pin for amplifier C1 44 IN3A1 Circuit 1 Channel 3 input for amplifier A1 45 IN3B1 Circuit 1 Channel 3 input for amplifier B1	40	IN2A1	Circuit 1	
42 IN2C1 Circuit 1 Channel 2 input for amplifier C1 43 GND Circuit 4A Ground pin for amplifier C1 44 IN3A1 Circuit 1 Channel 3 input for amplifier A1 45 IN3B1 Circuit 1 Channel 3 input for amplifier B1	41	IN2B1	Circuit 1	Channel 2 input for amplifier B1
43 GND Circuit 4A Ground pin for amplifier C1 44 IN3A1 Circuit 1 Channel 3 input for amplifier A1 45 IN3B1 Circuit 1 Channel 3 input for amplifier B1	42		Circuit 1	·
44 IN3A1 Circuit 1 Channel 3 input for amplifier A1 45 IN3B1 Circuit 1 Channel 3 input for amplifier B1	43	GND	Circuit 4A	
45 IN3B1 Circuit 1 Channel 3 input for amplifier B1				
	45			
	46			·

intersil FN6394.2 May 21, 2007

Pin Equivalent Circuits

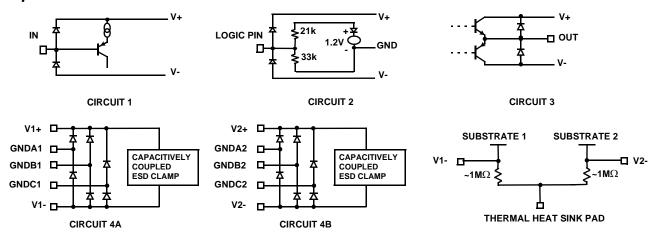

AC Test Circuits




FIGURE 42A. TEST CIRCUIT WITH OPTIMAL OUTPUT LOAD




FIGURE 42B. TEST CIRCUIT FOR MEASURING WITH 50 $\!\Omega$ OR 75 $\!\Omega$ INPUT TERMINATED EQUIPMENT




FIGURE 42C. BACKLOADED TEST CIRCUIT FOR VIDEO CABLE APPLICATION. BANDWIDTH AND LINEARITY FOR RL LESS THAN 500 Ω WILL BE DEGRADED.

FIGURE 42. TEST CIRCUITS

Figure 42A illustrates the optimum output load for testing AC performance. Figure 42B illustrates the optimum output load when connecting to 50Ω input terminated equipment.

13

Application Information

General

The ISL59483 is ideal as the matrix element of high performance switchers and routers. Key features include high impedance buffered analog inputs and excellent AC performance at output loads down to 150Ω for video cable-driving. The current feedback output amplifiers are stable operating into capacitive loads and bandwidth is optimized with a load of 5pF in parallel with a 500Ω . Total output capacitance can be split between the PCB capacitance and an external load capacitor.

Ground Connections

For the best isolation and crosstalk rejection, all GND pins must connect to the GND plane.

Power-up Considerations

The ESD protection circuits use internal diodes from all pins the V+ and V- supplies. In addition, a dV/dT-triggered clamp is connected between the V+ and V- pins, as shown in the Equivalent Circuits 1 through 4 section of the Pin Description table. The dV/dT triggered clamp imposes a maximum supply turn-on slew rate of 1V/µs. Damaging currents can flow for power supply rates-of-rise in excess of 1V/µs, such as during hot plugging. Under these conditions, additional methods should be employed to ensure the rate of rise is not exceeded.

Consideration must be given to the order in which power is applied to the V+ and V- pins, as well as analog and logic input pins. Schottky diodes (Motorola MBR0550T or equivalent) connected from V+ to ground and V- to ground (Figure 43) will shunt damaging currents away from the internal V+ and V- ESD diodes in the event that the V+ supply is applied to the device before the V- supply. One Schottky can be used to protect both V+ power supply pins, and a second for the protection of both V- pins.

intersil

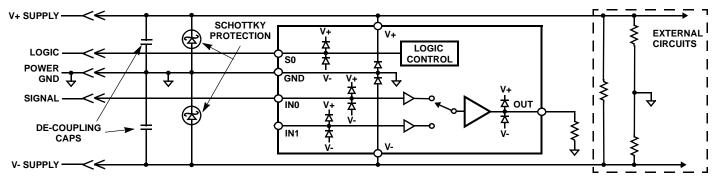


FIGURE 43. SCHOTTKY PROTECTION CIRCUIT

If positive voltages are applied to the logic or analog video input pins before V+ is applied, current will flow through the internal ESD diodes to the V+ pin. The presence of large decoupling capacitors and the loading effect of other circuits connected to V+ can result in damaging currents through the ESD diodes and other active circuits within the device. Therefore, adequate current limiting on the digital and analog inputs is needed to prevent damage during the time the voltages on these inputs are more positive than V+.

HIZ State

Each internal 4:1 triple MUX-amp has a high impedance output control pin (HIZ1 and HIZ2). Each has an internal pull-down resistor to set the output to the enabled state with no connection to the HIZ pin. The HIZ state is established within approximately 15ns by placing a logic high (>2V) on the HIZ pin. If the HIZ state is selected, the MUX 1 output is a high impedance 1.4M Ω with approximately 1.5pF in parallel with a 10 μ A bias current from the output. In the HIZ state the MUX 2 output impedance is ~900 Ω . The supply current during this state is the same as the active state.

EN and Power-down States

The $\overline{\text{EN}}$ pin is active low. An internal pull-down resistor ensures the device will be active with no connection to the $\overline{\text{EN}}$ pin. The power-down state is established within approximately 80ns if a logic high (>2V) is placed on the $\overline{\text{EN}}$ pin. In the power-down state, supply current is reduced significantly by shutting the three amplifiers off. The output presents a high impedance to the output pin, however, there is a risk that the disabled amplifier output can be back-driven at signal voltage levels exceeding ~2Vp_p. Under this condition, large incoming slew rates can cause fault currents of tens of mA. Therefore, the parallel connection of multiple outputs is not recommended unless the application can tolerate the limited power-down output impedance.

Output Capacitive Loading Considerations

High speed amplifiers may be sensitive to capacitance at the output. Excessive pulse overshoot may result from the combination of output slew rates approaching the amplifier maximum and the presence of parasitic capacitance. In applications where high slew rates are expected and PC board output pin capacitance exceeds ~5pF, series connected

resistors (ranging from 10Ω to 75Ω) may be needed close to the output pin in order to buffer the amplifer output stage from the effects of capacitive loading. When paralleling the amplifier outputs, resistance in series with MUX 1 output will form a resistor divider with the 900Ω HIZ impedance of MUX 2 when MUX 1 is enabled and MUX 2 is in the HIZ state. However, resistance in series with MUX 2 does not result in a resistor divider with MUX 1 due to the $1.4 M\Omega$ HIZ impedance. In all cases, series resistance will form a voltage divider with any downstream load resistance, therefore the effects of series resistance on throughput gain must be considered.

Limiting the Output Current

No output short circuit current limit exists on these parts. All applications need to limit the output current to less than 50mA. Adequate thermal heat sinking of the parts is also required.

PC Board Layout

The AC performance of this circuit depends greatly on the care taken in designing the PC board. The following are recommendations to achieve optimum high frequency performance from your PC board.

- The use of low inductance components such as chip resistors and chip capacitors is strongly recommended.
- Minimize signal trace lengths. Trace inductance and capacitance can easily limit circuit performance. Avoid sharp corners. Use rounded corners when possible. Vias in the signal lines add inductance at high frequency and should be avoided. PCB traces greater than 1" begin to exhibit transmission line characteristics with signal rise/fall times of 1ns or less. High frequency performance may be degraded for traces greater than one inch, unless controlled impedance (50Ω or 75Ω) strip lines or microstrips are used.
- Match channel to channel analog I/O trace lengths and layout symmetry. This will minimize propagation delay mismatches.
- Maximize use of AC de-coupled PCB layers. All signal I/O lines should be routed over continuous ground planes (i.e. no split planes or PCB gaps under these lines). Avoid vias in the signal I/O lines.

intersil FN6394.2 May 21, 2007

- Use proper value and location of termination resistors.
 Termination resistors should be as close to the device as possible.
- When testing, use good quality connectors and cables, matching cable types and keeping cable lengths to a minimum.
- A minimum of 2 power supply decoupling capacitors are recommended (1000pF, 0.01µF) as close to the devices as possible. Avoid vias between the cap and the device because vias adds unwanted inductance. Larger caps can be farther away. When vias are required in a layout, they should be routed as far away from the device as possible.
- The NIC pins are placed on both sides of the input pins.
 These pins are not internally connected to the die. It is recommended these pins be tied to ground to minimize crosstalk.

The QFN Package Requires Additional PCB Layout Rules for the Thermal Pad

The thermal pad is electrically connected to V- supply through the high resistance IC substrate. Its primary function is to provide heat sinking for the IC. However, because of the connection to the V1- and V2- supply pins through the substrate, the thermal pad must be tied to the V- supply to prevent unwanted current flow to the thermal pad. Do **not** tie this pin to GND as this could result in large back biased currents flowing between GND and the V- pins. Maximum AC performance is achieved if the thermal pad is attached to a dedicated decoupled layer in a multi-layered PC board. In cases where a dedicated layer is not possible, AC performance may be reduced at upper frequencies.

The thermal pad requirements are proportional to power dissipation and ambient temperature. A dedicated layer eliminates the need for individual thermal pad area. When a dedicated layer is not possible, an isolated thermal pad on another layer should be used. Pad area requirements should be evaluated on a case by case basis.

MUX Application Circuits

Each of the two 4:1 triple MUX amplifiers have their own binary-coded, TTL compatible channel select logic inputs (S0-1, 2, and S1-1, 2). All three amplifiers are switched simultaneously from their respective inputs with S0-1 S1-1 controlling MUX 1, and S0-2, S1-2 controlling MUX 2.

The HIZ control inputs (HIZ1, HIZ2) and device enable control inputs (EN1 and EN2) control MUX 1 and MUX 2 in a similar fashion. The individual control for each 4:1 triple MUX enables external connections to configure the device for different MUX applications.

8:1 RGB Dual Gain Video MUX

The triple input RGB 8:1 MUX (Figure 44) connects the RGB amplifier output of MUX 1 to the parallel-connected RGB amplifier output of MUX 2 to produce a single RGB video output. Input channels CH0 to CH3 are assigned to MUX 1 and have a throughput gain of 1. Channels CH4 through CH7 are assigned to MUX 2 and have a throughput gain of 2. Channels CH0 through CH3 are selected by setting S2 low, which forces HIZ1 low and HIZ2 high (enables MUX 1 and three-states MUX 2). Setting S2 high reverses the logic inputs of HIZ1, HIZ2 and switches from MUX 1 to MUX 2, enabling the selection of channels CH4 through CH7. The channel select inputs are parallel connected (S0-1 to S0-2) and S1-1 to S1-2) to form two logic controls, S0 and S1. The logic control truth table is shown in Figure 44.

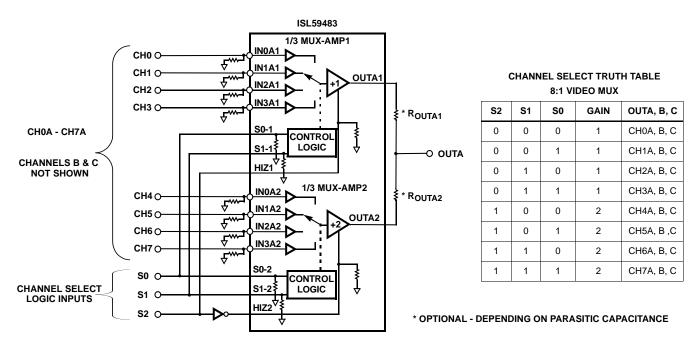


FIGURE 44. APPLICATION CIRCUIT FOR A DUAL GAIN 8:1 RGB VIDEO MUX

4:1 RGB Dual Gain Video MUX

Connecting the MUX inputs and outputs in parallel allows the 8 channel ISL59483 to be used as a 4:1 RGB MUX with selectable gains of 1 or 2 (Figure 10). In this example, the high input impedance of the MUX enables each input video line to be shared by any number of MUX input pins. The gain select

logic function is created by providing complementary logic to the HIZ1 and HIZ2 pins. Channels CH0 through CH3 are selected by connecting the MUX 1 and MUX 2 S0-1, 2 and S1-1, 2 channel select inputs together to form channel select (S0 and S1), as shown in the truth table in Figure 10.

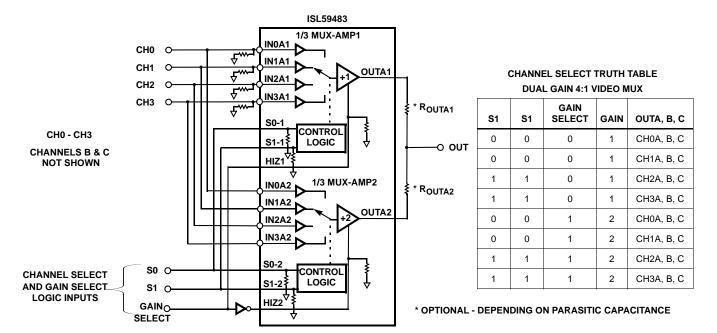


FIGURE 45. APPLICATION CIRCUIT FOR DUAL GAIN 4:1 VIDEO MUX

All Intersil U.S. products are manufactured, assembled and tested utilizing ISO9000 quality systems. Intersil Corporation's quality certifications can be viewed at www.intersil.com/design/quality

Intersil products are sold by description only. Intersil Corporation reserves the right to make changes in circuit design, software and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Intersil is believed to be accurate and reliable. However, no responsibility is assumed by Intersil or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Intersil or its subsidiaries.

For information regarding Intersil Corporation and its products, see www.intersil.com


intersil

FN6394.2

May 21, 2007

Package Outline Drawing

L48.7x7B 48 LEAD QUAD FLAT NO-LEAD PLASTIC PACKAGE Rev 0, 12/06

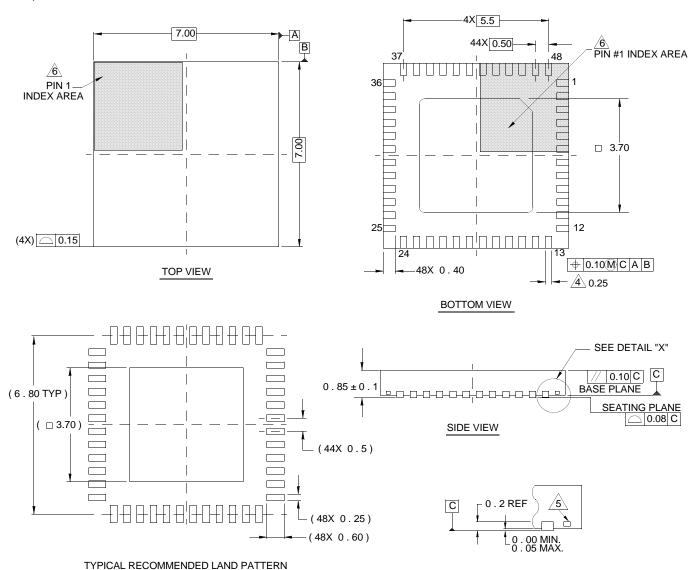

NOTES:

- Dimensions are in millimeters.
 Dimensions in () for Reference Only.
- 2. Dimensioning and tolerancing conform to AMSE Y14.5m-1994.
- 3. Unless otherwise specified, tolerance : Decimal ± 0.05

DETAIL "X"

- Dimension b applies to the metallized terminal and is measured between 0.15mm and 0.30mm from the terminal tip.
- 5. Tiebar shown (if present) is a non-functional feature.
- 6. The configuration of the pin #1 identifier is optional, but must be located within the zone indicated. The pin #1 indentifier may be either a mold or mark feature.

intersil FN6394.2 May 21, 2007