

ACSP-2655N

Biased Coaxial Schottky Detector



Features:

- Contains hermetically sealed modules, internal RF matching, DC return, and RF bypass capacitor.
- The video port is protected from static or transient charges.
- Input impedance matching.
- Models may be chosen for broadband RF performance or for optimized narrow bands



Specifications:

Parameter	Specification	Units
Frequency Range (min)	0.01 – 4.0	GHz
Sensitivity (min)	600	mV/mW
Flatness vs. Frequency (max)	0.40	±dB
Typical VSWR	1.25:1	dBm
Nominal Video Capacitance	270	pF

Notes:

Maximum input power: +20dBm
 Sensitivity is measured into an open circuit load (>10k ohm).
 VSWR is measured at or below -20dBm input power level.
 Standard bias is 100uA.

SCREENING:

Internal Visual per MIL-STD-883, Method 2017
 Temperature Cycle: -65°C to +100°C, 10 cycles

OPTIONAL HIGH-REL SCREENING (Ref MIL-PRF-38534):


Stabilization Bake per MIL-STD-883, Method 1008
 Temperature Cycle per MIL-STD-883, Method 1010
 Constant Acceleration per MIL-STD-883, Method 2001
 Burn-in per MIL-STD-883, Method 1015
 Leak Test per MIL-STD-883, Method 1014
 External Visual per MIL-STD-883, Method 2009

Environmental Specifications:

Designed to meet:
 MIL-E-5400, MIL-STD-202, MIL-E-16400
 Operating Temp: -55°C to +125°C
 Storage Temp: -65°C to +150°C
 Humidity: MIL-STD-202F, M103, Cond B
 Shock: MIL-STD-202F, M213, Cond B
 Altitude: MIL-STD-202F, M105, Cond B
 Vibration: MIL-STD-202F, M204, Cond B
 Thermal Shock: MIL-STD-202F, M107, Cond A
 Temperature Cycle: MIL-STD-202F, M105C, Cond D



40 Industrial Way East, Eatontown, NJ 07724 [USA]
 Phone: (732) 460-0212, Fax: (732) 460-0214
 www.aeroflex.com/acc, email: acc-sales@aeroflex.com

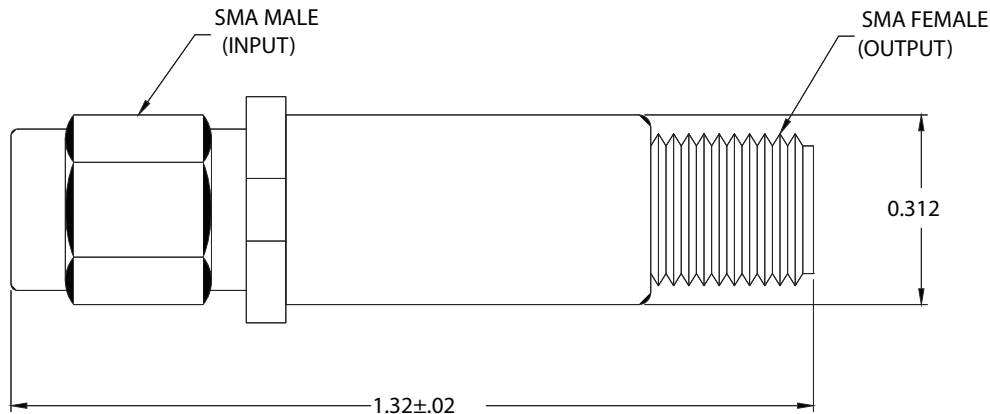

STANDARD CASE STYLE C3
(Optional Case Styles – C8, C15)

Part Number Ordering Information:

- Add desired polarity suffix: "N" for Negative, "P" for Positive (Ex: ACSP-2501N)
- Add "Z" for zero biased schottky option (Ex: ACSP-2501NZ)
- Add desired case style suffix: "C3" (Ex: ACSP-2501NZC3)
- Add "R" suffix: Reverse Connector Configuration (Ex: ACSP-2501NZC3R)
(SMA Female Input/SMA Male Output)
- Add "-RC" suffix: RoHS-compliant (Ex: ACSP-2501NZC3R-RC)

Notes (Continued):

- Video capacitance is used for RF bypass. This value can be changed if required for video response time. Contact the factory for more information.
- This part number is also available with a zero bias schottky diode.
- Due to higher impedance, the zero bias schottky will exhibit less sensitive TSS (typically a 3dB reduction)
- The temperature performance of the zero bias schottky is poor when operating at low input power levels.

Aeroflex Control Components
Aeroflex Microelectronic Solutions
40 Industrial Way East
Eatontown, NJ 07724 [USA]
Fax: (732) 460-0214

Sales
Phone: (732) 460-0212
ACC-sales@aeroflex.com

www.aeroflex.com/Microwave www.aeroflex.com/ACC

Aeroflex Control Components reserves the right to make changes to any products and services herein at any time without notice. Consult Aeroflex or an authorized sales representative to verify that the information in this data sheet is current before using this product. Aeroflex does not assume any responsibility or liability arising out of the application or use of any product or service described herein, except as expressly agreed to in writing by Aeroflex; nor does the purchase, lease, or use of a product or service from Aeroflex convey a license under any patent rights, copyrights, trademark rights, or any other of the intellectual rights of Aeroflex or of third parties.

Copyright 2011 Aeroflex Control Components. All rights reserved.

ISO 9001:2008 certified



Our passion for performance is defined by three attributes represented by these three icons: solution-minded, performance-driven and customer-focused.