

M62353P/FP/GP

R03DS0042EJ0400 Rev.4.00 Jun 03, 2011

8-bit 8ch D/A Converter with Buffer Amplifiers

Description

The M62353 is an integrated circuit semiconductor of CMOS structure with 8 channels of built-in D/A converters with output buffer operational amplifiers.

The 3-wire serial interface method is used for the transfer format of digital data to allow connection with microcomputer with minimum wiring.

It is able to cascading serial use with DO terminal.

The output buffer operational amplifier operates in the whole voltage range from power supply to ground for both input/output.


Features

- 12-bit serial data input (3-wire serial data transfer method)
- Highly stable output buffer operational amplifier allow operation in the all voltage range from power supply to ground.


Application

Adjustment/control of industrial or home-use electronic equipment, such as VTR camera, VTR set, TV, and CRT display.

Block Diagram

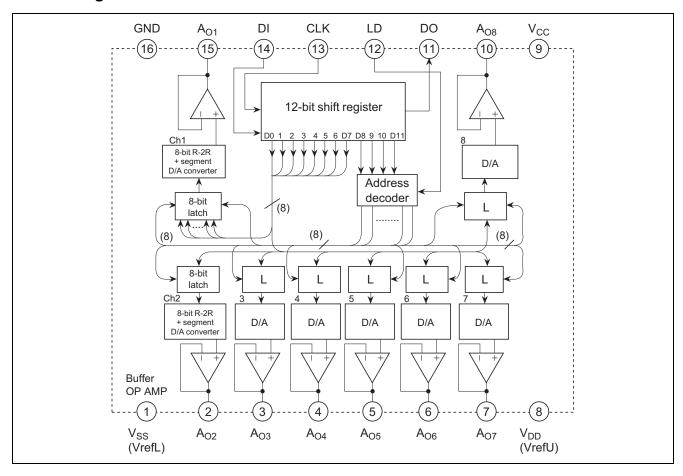


Pin Arrangement

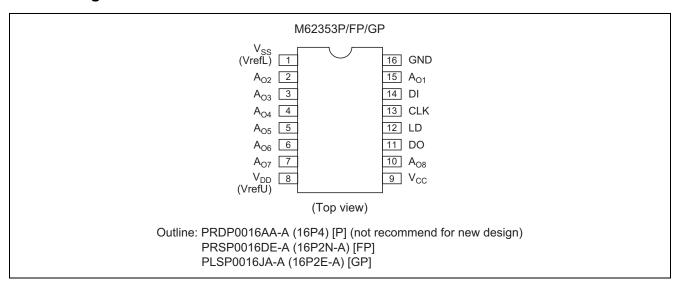

Pin Description

Pin No.	Pin Name	Function
14	DI	Serial data input terminal
11	DO	Serial data output terminal
13	CLK	Serial clock input terminal
12	LD	LD terminal input high level then latch circuit data load
15	A _{O1}	8-bit D/A converter output terminal
2	A _{O2}	
3	A _{O3}	
4	A _{O4}	
5	A _{O5}	
6	A _{O6}	
7	A _{O7}	
10	A _{O8}	
9	Vcc	Power supply terminal
16	GND	Digital and analog common GND
8	V_{DD}	D/A converter upper reference voltage input terminal
1	V _{SS}	D/A converter lower reference voltage input terminal

Block Diagram for Explanation of Terminals

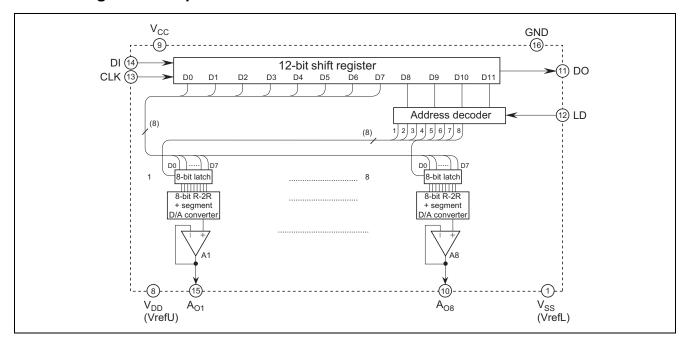

Absolute Maximum Ratings

Item	Symbol	Ratings	Unit
Supply voltage	V _{CC}	-0.3 to +7.0	V
D/A converter upper reference voltage	V _{DD}	-0.3 to +7.0	V
Input voltage	V _{IN}	-0.3 to V _{CC} + 0.3	V
Output voltage	Vo	-0.3 to V _{CC} + 0.3	V
Power dissipation	Pd	450 (P) / 300 (FP) / 150 (GP)	mV
Operating temperature	Topr	-20 to +85	°C
Storage temperature	Tstg	-40 to +125	°C

Electrical Characteristics

Digital Part

 $(V_{CC}, VrefU = +5 \ V \pm 10\%, V_{CC} \geq VrefU, GND, VrefL = 0 \ V, Ta = -20^{\circ}C \ to \ +85^{\circ}C, unless \ otherwise \ noted.)$

		Limits				
Item	Symbol	Min	Тур	Max	Unit	Test Conditions
Supply voltage	Vcc	4.5	5.0	5.5	V	
Circuit current	Icc	_	1.0	2.5	mA	CLK = 1 MHz operation
						$I_{OA} = 0 \mu A$
Input leak current	I _{ILK}	-10		10	μΑ	$V_{IN} = 0$ to V_{CC}
Input low voltage	V_{IL}	_		0.2 V _{CC}	>	
Input high voltage	V _{IH}	0.8 V _{CC}		_	V	
Output low voltage	V _{OL}	_		0.4	٧	I _{OL} = 2.5 mA
Output high voltage	V _{OH}	$V_{CC}-0.4$	_		V	$I_{OH} = -400 \ \mu A$

Analog Part

(V_{CC}, VrefU = +5 V \pm 10%, V_{CC} \geq VrefU, Ta = -20°C to +85°C, unless otherwise noted.)


(YCC, There - 1 5 V = 1070, YCC = Viete, 14 - 20 C to 165 C, almost otherwise noted.)										
		Limits								
Item	Symbol	Min	Тур	Max	Unit	Test Conditions				
Current dissipation	I_{DD}	_	0.9	1.7	mΑ	VrefU = 5 V, VrefL = 0 V				
						Data condition; at maximum current				
D/A converter upper	V_{DD}	3.5	_	Vcc	V	The output dose not necessarily be				
reference voltage range						the value within the reference voltage				
D/A converter lower	V _{SS}	GND	_	V _{CC} - 3.5	V	setting range. The output value is				
reference voltage range						determined by the buffer amplifier				
						output voltage range (V _{AO})				
Buffer amplifier output	V_{AO}	0.1	_	V _{CC} - 0.1	V	$I_{OA} = \pm 100 \mu A$				
voltage range		0.2	_	V _{CC} - 0.2		$I_{OA} = \pm 500 \ \mu A$				
Buffer amplifier output	I _{AO}	-1	_	1	mΑ	Upper side saturation voltage = 0.3 V				
drive range						Lower side saturation voltage = 0.2 V				
Differential nonlinearity	S _{DL}	-1.0	_	1.0	LSB	VrefU = 4.79 V				
error						VrefL = 0.95 V				
Nonlinearity error	S _L	-1.5	_	1.5	LSB	$V_{CC} = 5.5 \text{ V } (15 \text{ mV/LSB})$				
Zero code error	S _{ZERO}	-2	_	2	LSB	Without load ($I_{AO} = \pm 0 \mu A$)				
Full scale error	S _{FULL}	-2	_	2	LSB					
Output capacitive load	Co	_	_	0.1	μF					
Buffer amplifier output	Ro	_	5	_	Ω					
impedance										

AC Characteristics


 $(V_{CC}, VrefU = +5 \text{ V} \pm 10\%, V_{CC} \ge VrefU, GND, VrefL = 0 \text{ V}, Ta = -20 \text{ to } +85^{\circ}\text{C}, unless otherwise noted.)$

		Limits				
Item	Symbol	Min	Тур	Max	Unit	Test Conditions
Clock "L" pulse width	t _{CKL}	200	-		ns	
Clock "H" pulse width	t _{CKH}	200	1	1	ns	
Clock rise time	t _{CR}	1	1	200	ns	
Clock fall time	t _{CF}	_	_	200	ns	
Data setup time	t _{DCH}	30	-		ns	
Data hold time	t _{CHD}	60	_	_	ns	
LD setup time	t _{CHL}	200	_	_	ns	
LD hold time	t _{LDC}	100	_	_	ns	
LD "H" pulse width	t _{LDH}	100	_	_	ns	
Data output delay time	t _{DO}	70	_	350	ns	$C_L \le 100 \text{ pF}$
D/A output setting time	t _{LDD}	_	_	300	μS	$C_L \le 100 \text{ pF V}_{AO}$: $0.5 \leftrightarrow 4.5 \text{ V}$
						The time until the output becomes the final value of 1/2 LSB

Timing Chart

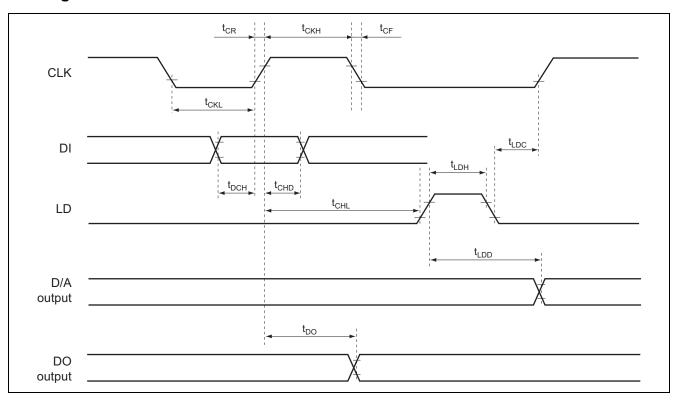

Digital Data Format



DAC Data


D0	D1	D2	D3	D4	D5	D6	D7	D/A Output
0	0	0	0	0	0	0	0	(VrefU – VrefL) / 256 × 1 + VrefL
1	0	0	0	0	0	0	0	(VrefU – VrefL) / 256 × 2 + VrefL
0	1	0	0	0	0	0	0	(VrefU – VrefL) / 256 × 3 + VrefL
1	1	0	0	0	0	0	0	(VrefU – VrefL) / 256 × 4 + VrefL
:	:	:	:	:	:	:	:	:
0	1	1	1	1	1	1	1	(VrefU – VrefL) / 256 × 255 + VrefL
1	1	1	1	1	1	1	1	VrefU

Note: $VrefU = V_{DD}$, $VrefL = V_{SS}$


DAC Select Data


D8	D9	D10	D11	DAC Selection
0	0	0	0	Don't care
0	0	0	1	A _{O1} select
0	0	1	0	A _{O2} select
0	0	1	1	A _{O3} select
0	1	0	0	A _{O4} select
0	1	0	1	A _{O5} select
0	1	1	0	A ₀₆ select
0	1	1	1	A _{O7} select
1	0	0	0	A _{O8} select
1	0	0	1	Don't care
1	0	1	0	Don't care
1	0	1	1	Don't care
1	1	0	0	Don't care
1	1	0	1	Don't care
1	1	1	0	Don't care
1	1	1	1	Don't care

Timing Chart (Model)

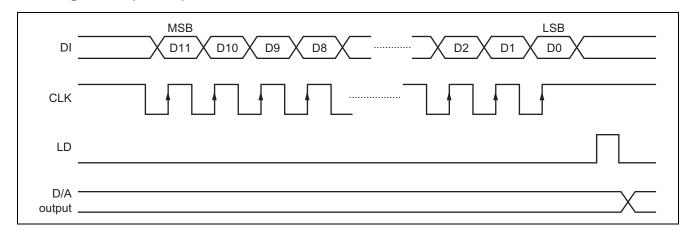



Typical Characteristics

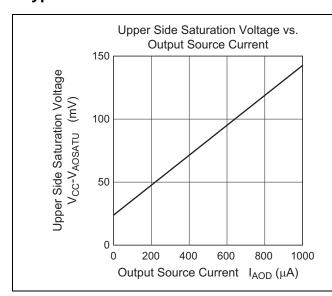

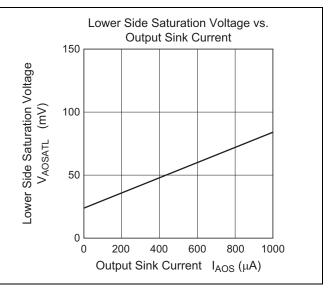

Package Dimensions

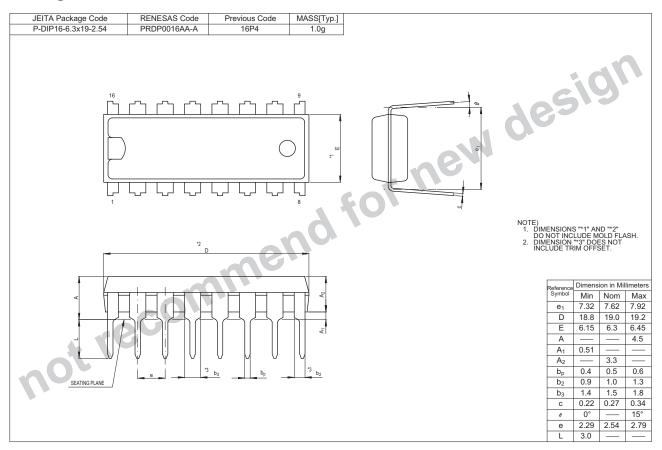

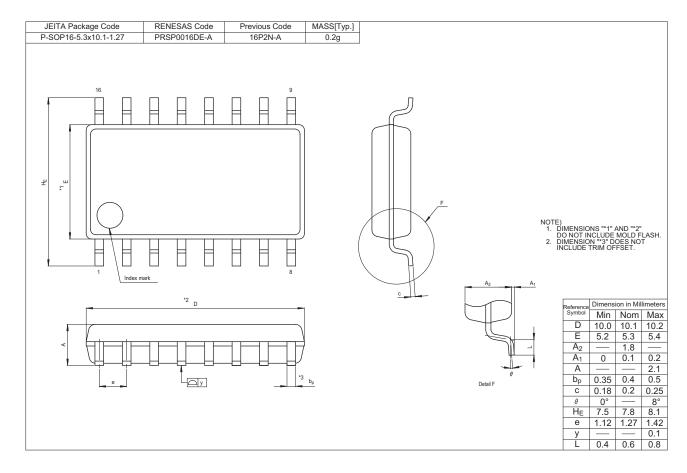

JEITA Package Code	RENESAS Code	Previous Code	MASS[Typ.]		
P-LSSOP16-4.4x5-0.65	PLSP0016JA-A	16P2E-A	0.06g		
# 16	Index mark	9	F		NOTE) 1. DIMENSIONS "1" AND "2" DO NOT INCLUDE MOLD FLASH. 2. DIMENSION "3" DOES NOT INCLUDE TRIM OFFSET.
	¹² D	*3 bp	<u>د الم</u>	A ₂ A ₁	Dimension in Millimeter

Notice

- 1. All information included in this document is current as of the date this document is issued. Such information, however, is subject to change without any prior notice. Before purchasing or using any Renesas Electronics products listed herein, please confirm the latest product information with a Renesas Electronics sales office. Also, please pay regular and careful attention to additional and different information to be disclosed by Renesas Electronics such as that disclosed through our website.
- 2. Renesas Electronics does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of Renesas Electronics products or technical information described in this document. No license, express, implied or otherwise, is granted hereby under any patents, copyrights or other intellectual property rights of Renesas Electronics or
- 3. You should not alter, modify, copy, or otherwise misappropriate any Renesas Electronics product, whether in whole or in part.
- 4. Descriptions of circuits, software and other related information in this document are provided only to illustrate the operation of semiconductor products and application examples. You are fully responsible for the incorporation of these circuits, software, and information in the design of your equipment. Renesas Electronics assumes no responsibility for any losses incurred by you or third parties arising from the
- 5. When exporting the products or technology described in this document, you should comply with the applicable export control laws and regulations and follow the procedures required by such laws and regulations. You should not use Renesas Electronics products or the technology described in this document for any purpose relating to military applications or use by the military, including but not limited to the development of weapons of mass destruction. Renesas Electronics products and technology may not be used for or incorporated into any products or systems whose manufacture, use, or sale is prohibited under any applicable domestic or foreign laws or regulations.
- 6. Renesas Electronics has used reasonable care in preparing the information included in this document, but Renesas Electronics does not warrant that such information is error free. Renesas Electronics assumes no liability whatsoever for any damages incurred by you resulting from errors in or omissions from the information included herein.
- 7. Renesas Electronics products are classified according to the following three quality grades: "Standard", "High Quality", and "Specific". The recommended applications for each Renesas Electronics product depends on the product's quality grade, as indicated below. You must check the quality grade of each Renesas Electronics product before using it in a particular application. You may not use any Renesas Electronics product for any application categorized as "Specific" without the prior written consent of Renesas Electronics. Further, you may not use any Renesas Electronics product for any application for which it is not intended without the prior written consent of Renesas Electronics. Renesas Electronics shall not be in any way liable for any damages or losses incurred by you or third parties arising from the use of any Renesas Electronics product for an application categorized as "Specific" or for which the product is not intended where you have failed to obtain the prior written consent of Renesas Electronics. The quality grade of each Renesas Electronics product is "Standard" unless otherwise expressly specified in a Renesas Electronics data sheets or data books, etc
 - Computers; office equipment; communications equipment; test and measurement equipment; audio and visual equipment; home electronic appliances; machine tools personal electronic equipment; and industrial robots.
 - "High Quality": Transportation equipment (automobiles, trains, ships, etc.); traffic control systems; anti-disaster systems; anti-crime systems; safety equipment; and medical equipment not specifically designed for life support.
 - Aircraft; aerospace equipment; submersible repeaters; nuclear reactor control systems; medical equipment or systems for life support (e.g. artificial life support devices or systems), surgical "Specific": implantations, or healthcare intervention (e.g. excision, etc.), and any other applications or purposes that pose a direct threat to human life.
- 8. You should use the Renesas Electronics products described in this document within the range specified by Renesas Electronics, especially with respect to the maximum rating, operating supply voltage range, movement power voltage range, heat radiation characteristics, installation and other product characteristics. Renesas Electronics shall have no liability for malfunctions or damages arising out of the use of Renesas Electronics products beyond such specified ranges.
- 9. Although Renesas Electronics endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Further, Renesas Electronics products are not subject to radiation resistance design. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a Renesas Electronics product, such as safety design for hardware and software including but not limited to redundancy, fire control and malfunction prevention, appropriate treatment for aging degradation or any other appropriate measures. Because the evaluation of microcomputer software alone is very difficult please evaluate the safety of the final products or system manufactured by you.
- 10. Please contact a Renesas Electronics sales office for details as to environmental matters such as the environmental compatibility of each Renesas Electronics product. Please use Renesas Electronics products in compliance with all applicable laws and regulations that regulate the inclusion or use of controlled substances, including without limitation, the EU RoHS Directive. Renesas Electronics assumes no liability for damages or losses occurring as a result of your noncompliance with applicable laws and regulations.
- 11. This document may not be reproduced or duplicated, in any form, in whole or in part, without prior written consent of Renesas Electronics
- 12. Please contact a Renesas Electronics sales office if you have any questions regarding the information contained in this document or Renesas Electronics products, or if you have any other inquiries.
- (Note 1) "Renesas Electronics" as used in this document means Renesas Electronics Corporation and also includes its majority-owned subsidiaries
- (Note 2) "Renesas Electronics product(s)" means any product developed or manufactured by or for Renesas Electronics



SALES OFFICES

Renesas Electronics Corporation

http://www.renesas.com

Refer to "http://www.renesas.com/" for the latest and detailed information

enesas Electronics America Inc. 80 Scott Boulevard Santa Clara, CA 95050-2554, U.S.A. dl: +1-408-588-6000, Fax: +1-408-588-6130

Renesas Electronics Canada Limited 1101 Nicholson Road, Newmarket, Ontario L3Y 9C3, Canada Tel: +1-905-898-5441, Fax: +1-905-898-3220

Renesas Electronics Europe Limited Dukes Meadow, Millboard Road, Boume End, Buckinghamshire, SL8 5FH, U.K Tel: +44-1628-585-100, Fax: +44-1628-585-900

Renesas Electronics Europe GmbH

Arcadiastrasse 10, 40472 Düsseldorf, Germany Tel: +49-211-65030, Fax: +49-211-6503-1327

Renesas Electronics (China) Co., Ltd.
7th Floor, Quantum Plaza, No.27 ZhiChunLu Haidian District, Beijing 100083, P.R.China
Tel: +86-10-2035-1155, Fax: +86-10-8235-7679

Renesas Electronics (Shanghai) Co., Ltd.
Unit 204, 205, AZIA Center, No. 1233 Lujiazui Ring Rd., Pudong District, Shanghai 200120, China
Tel: +86-21-5877-1818, Fax: +86-21-5887-7589

Renesas Electronics Hong Kong Limited
Unit 1601-1613, 16/F., Tower 2, Grand Century Place, 193 Prince Edward Road West, Mongkok, Kowloon, Hong Kong
Tel: +852-2868-9318, Fax: +852-2886-9022/9044

Renesas Electronics Taiwan Co., Ltd. 13F, No. 363, Fu Shing North Road, Taipei, Taiv Tel: +886-2-8175-9600, Fax: +886 2-8175-9670

Renesas Electronics Singapore Pte. Ltd. 1 harbourFront Avenue, #06-10, keppel Bay Tower, Singapore 098632 Tel: +65-6213-0200, Fax: +65-6278-8001

Renesas Electronics Malaysia Sdn.Bhd.
Unit 906, Block B, Menara Amcorp, Amcorp Trade Centre, No. 18, Jln Persiaran Barat, 46050 Petaling Jaya, Selangor Darul Ehsan, Malaysia
Tel: +60-3-7955-9390, Fax-+60-3-7955-9510

Renesas Electronics Korea Co., Ltd. 11F., Samik Lavied' or Bidg., 720-2 Yeoksam-Dong, Kangnam-Ku, Seoul 135-080, Korea Tel: 482-2-558-3737, Fax: 482-2-558-5141

© 2011 Renesas Electronics Corporation. All rights reserved.