



RDL[®]
Radio Design Labs

SPECIALISTS IN PRACTICAL PRECISION ENGINEERING™

STICK-ON[®] SERIES

Model ST-PA2

Utility Power Amplifier

ANYWHERE YOU NEED...

- Up to 2 Watts RMS into 8 Ω
- Up to +12 dBu into 600 Ω
- Quality Utility Amplifier
- Intercom Driver
- Music-On-Hold Driver

You Need The ST-PA2!



The ST-PA2 is a utility power amplifier in the convenient line of STICK-ON products from Radio Design Labs. The durable bottom adhesive permits quick, permanent or removable mounting nearly anywhere or it may be used with RDL's racking accessories. The ST-PA2 gives you the advantages of a utility amplifier with the added convenience of STICK-ONS!

APPLICATION: The ST-PA2 represents the second-generation in RDL's breakthrough in the traditional power vs. size ratio. Present technology permits features and performance at the most economical cost ever. The ST-PA2 offers 2 Watts of power, twice the power of most utility amplifiers, for a price you would expect to pay for 1 Watt!

The ST-PA2 features a single, unbalanced audio input, a gain control, and two outputs. The first output is designed to deliver a clean 2 Watts RMS into an 8 Ω speaker. The second output is intended to drive 600 Ω transformers, typically on equipment inputs. This makes the ST-PA2 uniquely suited applications such as music-on-hold inputs on telephone systems, which may have either 8 Ω or 600 Ω inputs. If desired, both outputs may be used at the same time.

The convenience and low cost of the ST-PA2 make it the ultimate choice as a building block in many systems, from simple to complex. It may be used in combination with other STICK-ONS to form custom intercoms or talk-back systems, or can be used by itself to drive a single speaker with music or voice. For either straightforward or creative applications requiring a utility power amplifier, the ST-PA2 is the optimum choice!

Note: The ST-PA2 is not intended to drive long 600 Ω audio lines or multiple equipment inputs. For these applications, see the STA-1 (stereo), the STA-1M (mono), or the ST-DA3 (distributed). If balanced audio input is required, see the ST-PA6 audio power amplifier.

Wherever an audio amplifier is needed, the ST-PA2 is the ideal choice. Use the ST-PA2 combined with other RDL RACK-UP[®], STICK-ON, TX[™], or FLAT-PAK[™] series products as part of a complete audio/video system.

STICK-ON[®] SERIES


Model ST-PA2

Utility Power Amplifier

Installation/Operation



EN55103-1 E1-E5; EN55103-2 E1-E4
Typical Performance reflects product at publication time exclusive of EMC data, if any, supplied with product. Specifications are subject to change without notice.

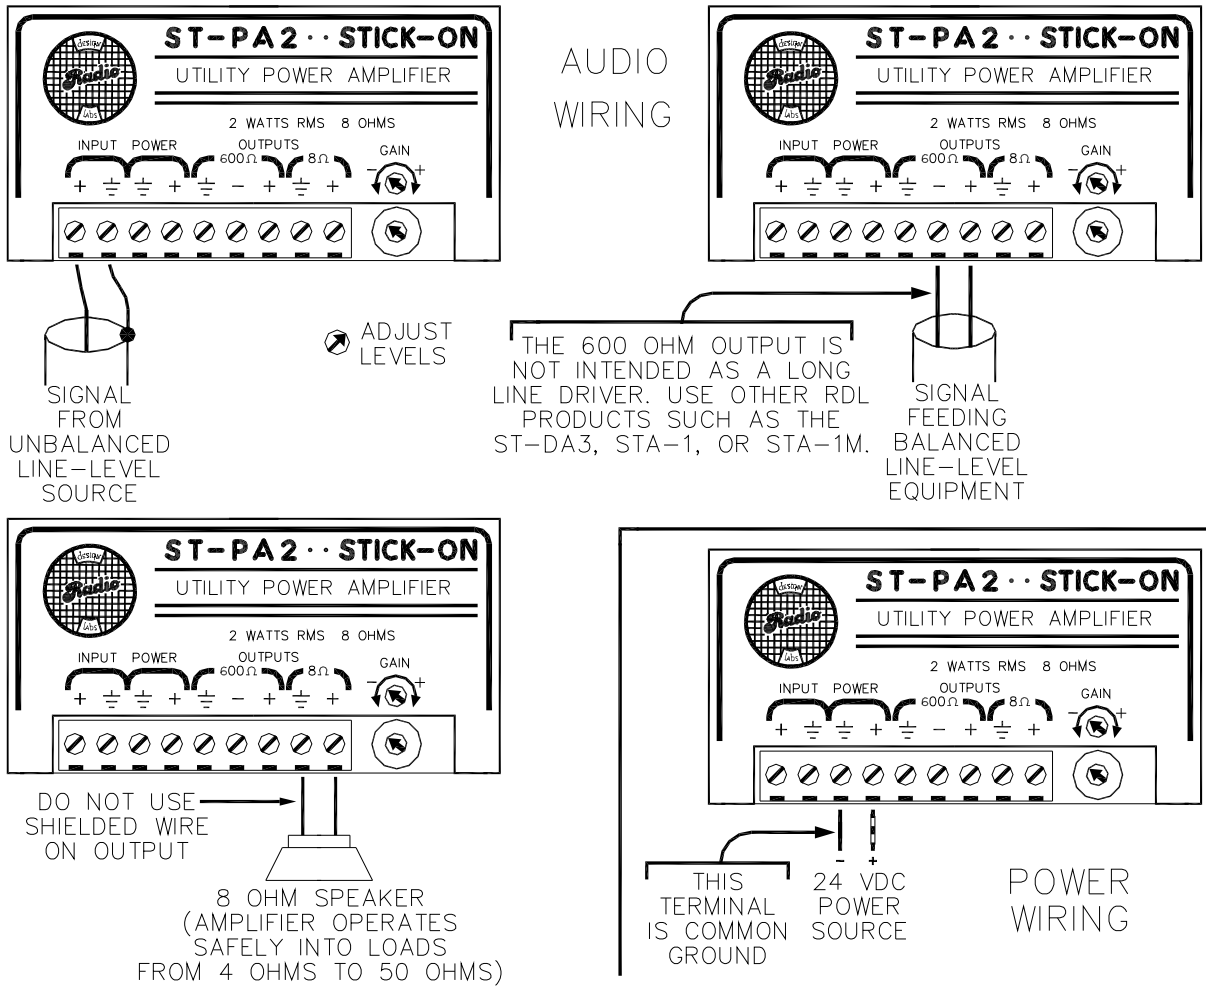

TYPICAL PERFORMANCE

Input Configuration:	Unbalanced 10 k Ω
Input Level:	-15 dBV minimum (for rated power output) -20 dBV minimum (for 1 watt RMS into 8 Ω)
Frequency Response:	35 Hz to 30 kHz (8 Ω +/- 1.5 dB) 20 Hz to 30 kHz (600 Ω +/- 0.5 dB)
THD+N:	< 0.75% (0.5 % typical)
Noise:	< -80 dB (8 Ω @ 2 W RMS) < -70 dB (600 Ω , referred to +4 dBu)
Outputs (2):	1 @ 8 Ω , 2 watts RMS maximum 1 @ 600 Ω , +12 dBu maximum
Power:	24 to 33 Vdc @ 250 mA, Ground-referenced