

Zener Diode Chip Series

CD4614 thru CD4627




Available in JANHC and JANKC per MIL-PRF-19500/435



Features

- All junctions completely protected with silicon dioxide
- 0.5 Watt capability with proper heat sinking
- Electrically equivalent to 1N4614 thru 1N4627
- Compatible with all wire bonding and die attach techniques with the exception of solder reflow.

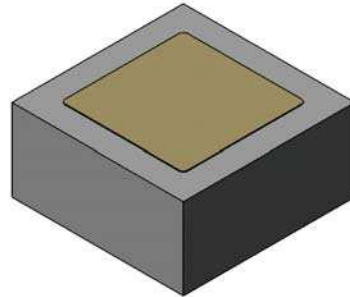

Maximum Ratings

Operating Temperature: -65°C to +175°C
 Storage Temperature: -65°C to +175°C
 Forward Voltage @ 200mA: 1.5 volts maximum

Electrical Specifications @ +25 °C (Unless Otherwise Specified)


| TYPE NUMBER | NOMINAL ZENER VOLTAGE Vz @ I _{ZT} (Note 1) | ZENER TEST CURRENT I _{ZT} | MAXIMUM ZENER IMPEDANCE Z _{ZT} @ I _{ZT} (Note 2) | MAXIMUM REVERSE LEAKAGE CURRENT I _R @ V _R | |
|-------------|---|------------------------------------|--|---|-------|
| | VOLTS | μA | OHMS | μA | VOLTS |
| CD4614 | 1.8 | 250 | 1200 | 7.5 | 1 |
| CD4615 | 2.0 | 250 | 1250 | 5.0 | 1 |
| CD4616 | 2.2 | 250 | 1300 | 4.0 | 1 |
| CD4617 | 2.4 | 250 | 1400 | 2.0 | 1 |
| CD4618 | 2.7 | 250 | 1500 | 1.0 | 1 |
| CD4619 | 3.0 | 250 | 1600 | 0.8 | 1 |
| CD4620 | 3.3 | 250 | 1650 | 7.5 | 1.5 |
| CD4621 | 3.6 | 250 | 1700 | 7.5 | 2 |
| CD4622 | 3.9 | 250 | 1650 | 5.0 | 2 |
| CD4623 | 4.3 | 250 | 1600 | 4.0 | 2 |
| CD4624 | 4.7 | 250 | 1550 | 10.0 | 3 |
| CD4625 | 5.1 | 250 | 1500 | 10.0 | 3 |
| CD4626 | 5.6 | 250 | 1400 | 10.0 | 4 |
| CD4627 | 6.2 | 250 | 1200 | 10.0 | 5 |

NOTE 1 Zener voltage range equals nominal Zener voltage ± 5% for no suffix types. Zener voltage is read using a pulse measurement, 10 milliseconds maximum. "C" suffix = ± 2% and "D" suffix = ± 1%.

NOTE 2 Zener impedance is derived by superimposing on I_{ZT} a 60 Hz rms AC current equal to 10 % of I_{ZT}.



Outline Drawing

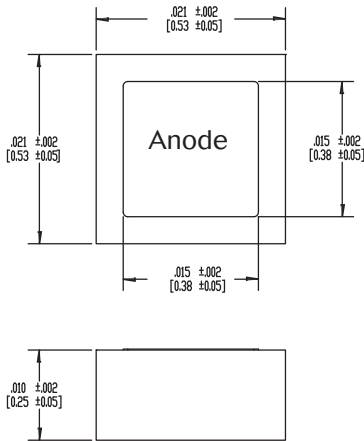

DESIGN DATA

METALLIZATION: Top: (Anode) Al
Back: (Cathode) Au


AL THICKNESS: 25,000 Å Minimum

GOLD THICKNESS: 4,000 Å Minimum

CHIP THICKNESS: 10 Mils

CIRCUIT LAYOUT DATA: For Zener operation, cathode must be operated positive with respect to anode.

Graphs

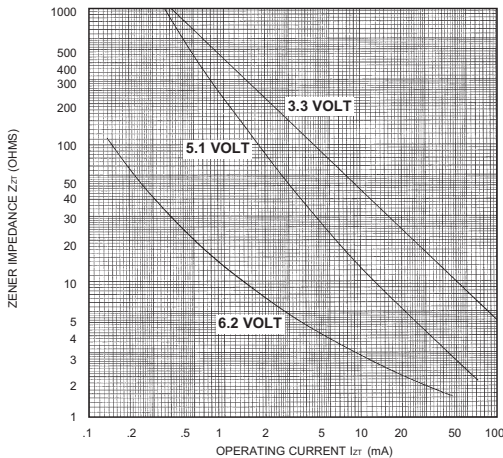

ZENER IMPEDANCE VS. OPERATING CURRENT

Aeroflex / Metelics, Inc.

975 Stewart Drive,
Sunnyvale, CA 94085
Tel: (408) 737-8181
Fax: (408) 733-7645

Sales: 888-641-SEMI (7364)

Hi-Rel Components

9 Hampshire Street,
Lawrence, MA 01840
Tel: (603) 641-3800
Fax: (978) 683-3264

www.aeroflex.com/metelics-hirelcomponents

54 Grenier Field Road,
Londonderry, NH 03053
Tel: (603) 641-3800
Fax: (603)-641-3500

www.aeroflex.com/metelics metelics-sales@aeroflex.com

Aeroflex / Metelics, Inc. reserves the right to make changes to any products and services herein at any time without notice. Consult Aeroflex or an authorized sales representative to verify that the information in this data sheet is current before using this product. Aeroflex does not assume any responsibility or liability arising out of the application or use of any product or service described herein, except as expressly agreed to in writing by Aeroflex; nor does the purchase, lease, or use of a product or service from Aeroflex convey a license under any patent rights, copyrights, trademark rights, or any other of the intellectual rights of Aeroflex or of third parties.

Copyright 2011 Aeroflex / Metelics. All rights reserved.

ISO 9001: 2008 certified companies



Our passion for performance is defined by three attributes represented by these three icons: solution-minded, performance-driven and customer-focused.