

# 74AUP1T45

Low-power dual supply translating transceiver; 3-state

Rev. 5 — 9 August 2012

Product data sheet

## 1. General description

The 74AUP1T45 is a single bit transceiver featuring two data input-outputs (A and B), a direction control input (DIR) and dual supply pins ( $V_{CC(A)}$  and  $V_{CC(B)}$ ) which enable bidirectional level translation. Both  $V_{CC(A)}$  and  $V_{CC(B)}$  can be supplied at any voltage between 1.1 V and 3.6 V making the device suitable for interfacing between any of the low voltage nodes (1.2 V, 1.5 V, 1.8 V, 2.5 V and 3.3 V). Pins A and DIR are referenced to  $V_{CC(A)}$  and pin B is referenced to  $V_{CC(B)}$ . A HIGH on DIR allows transmission from A to B and a LOW on DIR allows transmission from B to A.

Schmitt trigger action on all inputs makes the circuit tolerant of slower input rise and fall times across the entire  $V_{CC(A)}$  and  $V_{CC(B)}$  ranges. The device ensures low static and dynamic power consumption and is fully specified for partial power-down applications using  $I_{OFF}$ . The  $I_{OFF}$  circuitry disables the output, preventing any damaging backflow current through the device when it is powered down. In suspend mode when either  $V_{CC(A)}$  or  $V_{CC(B)}$  are at GND, both A and B are in the high-impedance OFF-state.

## 2. Features and benefits

- Wide supply voltage range:
  - ◆  $V_{CC(A)}$ : 1.1 V to 3.6 V
  - ◆  $V_{CC(B)}$ : 1.1 V to 3.6 V
- High noise immunity
- Complies with JEDEC standards:
  - ◆ JESD8-7 (1.2 V to 1.95 V)
  - ◆ JESD8-5 (1.8 V to 2.7 V)
  - ◆ JESD8-B (2.7 V to 3.6 V)
- ESD protection:
  - ◆ HBM JESD22-A114F Class 3A exceeds 5000 V
  - ◆ MM JESD22-A115-A exceeds 200 V
  - ◆ CDM JESD22-C101E exceeds 1000 V
- Low static power consumption;  $I_{CC} = 0.9 \mu A$  (maximum)
- Suspend mode
- Latch-up performance exceeds 100 mA per JESD 78 Class II
- Inputs accept voltages up to 3.6 V
- Low noise overshoot and undershoot < 10 % of  $V_{CC}$
- $I_{OFF}$  circuitry provides partial power-down mode operation
- Multiple package options
- Specified from -40 °C to +85 °C and -40 °C to +125 °C



### 3. Ordering information

**Table 1. Ordering information**

| Type number | Package           |       |   |  | Version |
|-------------|-------------------|-------|---|--|---------|
|             | Temperature range | Name  | Description   |  |         |
| 74AUP1T45GW | -40 °C to +125 °C | SC-88 | plastic surface-mounted package; 6 leads  |  | SOT363  |
| 74AUP1T45GM | -40 °C to +125 °C | XSON6 | plastic extremely thin small outline package; no leads; 6 terminals; body 1 × 1.45 × 0.5 mm |  | SOT886  |
| 74AUP1T45GF | -40 °C to +125 °C | XSON6 | plastic extremely thin small outline package; no leads; 6 terminals; body 1 × 1 × 0.5 mm    |  | SOT891  |
| 74AUP1T45GN | -40 °C to +125 °C | XSON6 | extremely thin small outline package; no leads; 6 terminals; body 0.9 × 1.0 × 0.35 mm       |  | SOT1115 |
| 74AUP1T45GS | -40 °C to +125 °C | XSON6 | extremely thin small outline package; no leads; 6 terminals; body 1.0 × 1.0 × 0.35 mm       |  | SOT1202 |


### 4. Marking

**Table 2. Marking**


| Type number | Marking code <sup>[1]</sup> |
|-------------|-----------------------------|
| 74AUP1T45GW | p5                          |
| 74AUP1T45GM | p5                          |
| 74AUP1T45GF | p5                          |
| 74AUP1T45GN | p5                          |
| 74AUP1T45GS | p5                          |

[1] The pin 1 indicator is located on the lower left corner of the device, below the marking code.

### 5. Functional diagram

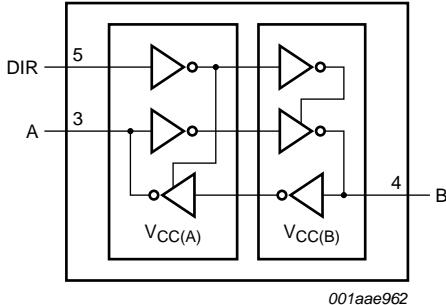

**Fig 1. Logic symbol**

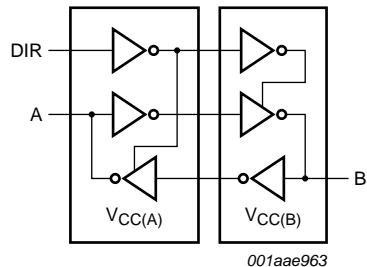

**Fig 2. Logic diagram**

## 6. Pinning information

### 6.1 Pinning

|   |   |  |
|---|---|--|
| <p><b>Fig 3. Pin configuration SOT363</b></p> | <p><b>Fig 4. Pin configuration SOT886</b></p> | <p><b>Fig 5. Pin configuration SOT891, SOT1115 and SOT1202</b></p> |
|---|---|--|

### 6.2 Pin description

**Table 3. Pin description**

| Symbol             | Pin | Description            |
|--------------------|-----|------------------------|
| V <sub>CC(A)</sub> | 1   | supply voltage A       |
| GND                | 2   | ground (0 V)           |
| A                  | 3   | data input or output A |
| B                  | 4   | data input or output B |
| DIR                | 5   | direction control DIR  |
| V <sub>CC(B)</sub> | 6   | supply voltage B       |

## 7. Functional description

**Table 4. Function table<sup>[1]</sup>**

| Supply voltage                          | Input <sup>[2]</sup> | Input/output <sup>[3]</sup> |              |
|---|----------------------|-----------------------------|--------------|
| V <sub>CC(A)</sub> , V <sub>CC(B)</sub> | DIR                  | A                           | B            |
| 1.1 V to 3.6 V                          | L                    | A = B                       | input        |
| 1.1 V to 3.6 V                          | H                    | input                       | B = A        |
| GND                                     | X                    | suspend mode                | suspend mode |

[1] H = HIGH voltage level; L = LOW voltage level; X = don't care.

[2] The DIR input circuit is referenced to V<sub>CC(A)</sub>.

[3] The input circuit of the data I/Os are always active.

## 8. Limiting values

**Table 5. Limiting values**

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V).

| Symbol      | Parameter               | Conditions   | Min    | Max      | Unit                        |    |
|-------------|-------------------------|--|--------|----------|-----------------------------|----|
| $V_{CC(A)}$ | supply voltage A        |  | -0.5   | +4.6     | V                           |    |
| $V_{CC(B)}$ | supply voltage B        |  | -0.5   | +4.6     | V                           |    |
| $I_{IK}$    | input clamping current  | $V_I < 0 \text{ V}$                                    | -50    | -        | mA                          |    |
| $V_I$       | input voltage           |  | [1]    | -0.5     | +4.6                        | V  |
| $I_{OK}$    | output clamping current | $V_O < 0 \text{ V}$                                    | -50    | -        | mA                          |    |
| $V_O$       | output voltage          | Active mode  |        |          |                             |    |
|             |                         | A port   | [1][2] | -0.5     | $V_{CC(A)} + 0.5 \text{ V}$ |    |
|             |                         | B port   | [1][2] | -0.5     | $V_{CC(B)} + 0.5 \text{ V}$ |    |
|             |                         | suspend or 3-state mode                                | [1][2] | -0.5     | +4.6                        | V  |
| $I_O$       | output current          | $V_O = 0 \text{ V} \text{ to } V_{CC}$                 | -      | $\pm 20$ | mA                          |    |
| $I_{CC}$    | supply current          |  | -      | 50       | mA                          |    |
| $I_{GND}$   | ground current          |  | -50    | -        | mA                          |    |
| $T_{stg}$   | storage temperature     |  | -65    | +150     | °C                          |    |
| $P_{tot}$   | total power dissipation | $T_{amb} = -40 \text{ °C} \text{ to } +125 \text{ °C}$ | [3]    | -        | 250                         | mW |

[1] The minimum input and output voltage ratings may be exceeded if the input and output current ratings are observed.

[2] The values of  $V_{CC(A)}$  and  $V_{CC(B)}$  are provided in the recommended operating conditions; see [Table 6](#).

[3] For SC-88 packages: above 87.5 °C the value of  $P_{tot}$  derates linearly with 4.0 mW/K.

For XSON6 packages: above 118 °C the value of  $P_{tot}$  derates linearly with 7.8 mW/K.

## 9. Recommended operating conditions

**Table 6. Recommended operating conditions**

| Symbol              | Parameter                           | Conditions  | Min | Max  | Unit      |   |
|---------------------|-------------------------------------|---|-----|------|-----------|---|
| $V_{CC(A)}$         | supply voltage A                    |   | 1.1 | 3.6  | V         |   |
| $V_{CC(B)}$         | supply voltage B                    |   | 1.1 | 3.6  | V         |   |
| $V_I$               | input voltage                       |   | 0   | 3.6  | V         |   |
| $V_O$               | output voltage                      |   | [1] | 0    | $V_{CCO}$ | V |
| $T_{amb}$           | ambient temperature                 |   | -40 | +125 | °C        |   |
| $\Delta t/\Delta V$ | input transition rise and fall rate | $V_{CCI} = 1.1 \text{ V} \text{ to } 3.6 \text{ V}$ | 0   | 200  | ns/V      |   |

[1]  $V_{CCO}$  is the supply voltage associated with the output port.

## 10. Static characteristics

**Table 7. Static characteristics**

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

| Symbol                         | Parameter                 | Conditions   | Min    | Typ                       | Max  | Unit                      |
|--------------------------------|---------------------------|--|--------|---------------------------|------|---------------------------|
| <b>T<sub>amb</sub> = 25 °C</b> |                           |  |        |                           |      |                           |
| V <sub>IH</sub>                | HIGH-level input voltage  | data input<br>V <sub>CCI</sub> = 1.1 V to 1.95 V   | [1][3] | 0.65 × V <sub>CCI</sub>   | -    | -                         |
|                                |                           | V <sub>CCI</sub> = 2.3 V to 2.7 V  |        | 1.6                       | -    | -                         |
|                                |                           | V <sub>CCI</sub> = 3.0 V to 3.6 V  |        | 2.0                       | -    | -                         |
|                                |                           | DIR input<br>V <sub>CCI</sub> = 1.1 V to 1.95 V  | [1][4] | 0.65 × V <sub>CC(A)</sub> | -    | -                         |
|                                |                           | V <sub>CCI</sub> = 2.3 V to 2.7 V  |        | 1.6                       | -    | -                         |
|                                |                           | V <sub>CCI</sub> = 3.0 V to 3.6 V  |        | 2.0                       | -    | -                         |
| V <sub>IL</sub>                | LOW-level input voltage   | data input<br>V <sub>CCI</sub> = 1.1 V to 1.95 V   | [1][3] | -                         | -    | 0.35 × V <sub>CCI</sub>   |
|                                |                           | V <sub>CCI</sub> = 2.3 V to 2.7 V  |        | -                         | -    | 0.7                       |
|                                |                           | V <sub>CCI</sub> = 3.0 V to 3.6 V  |        | -                         | -    | 0.9                       |
|                                |                           | DIR input<br>V <sub>CCI</sub> = 1.1 V to 1.95 V  | [1][4] | -                         | -    | 0.35 × V <sub>CC(A)</sub> |
|                                |                           | V <sub>CCI</sub> = 2.3 V to 2.7 V  |        | -                         | -    | 0.7                       |
|                                |                           | V <sub>CCI</sub> = 3.0 V to 3.6 V  |        | -                         | -    | 0.9                       |
| V <sub>OH</sub>                | HIGH-level output voltage | V <sub>I</sub> = V <sub>IH</sub><br>I <sub>O</sub> = -20 µA;<br>V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.1 V to 3.6 V | [2]    | V <sub>CCO</sub> - 0.1    | -    | -                         |
|                                |                           | I <sub>O</sub> = -1.1 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.1 V  | [2]    | 0.75 × V <sub>CCO</sub>   | -    | -                         |
|                                |                           | I <sub>O</sub> = -1.7 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.4 V  |        | 1.11                      | -    | -                         |
|                                |                           | I <sub>O</sub> = -1.9 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.65 V   |        | 1.32                      | -    | -                         |
|                                |                           | I <sub>O</sub> = -2.3 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 2.3 V  |        | 2.05                      | -    | -                         |
|                                |                           | I <sub>O</sub> = -3.1 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 2.3 V  |        | 1.9                       | -    | -                         |
|                                |                           | I <sub>O</sub> = -2.7 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 3.0 V  |        | 2.72                      | -    | -                         |
|                                |                           | I <sub>O</sub> = -4.0 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 3.0 V  |        | 2.6                       | -    | -                         |
| V <sub>OL</sub>                | LOW-level output voltage  | V <sub>I</sub> = V <sub>IL</sub><br>I <sub>O</sub> = 20 µA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.1 V to 3.6 V     | -      | -                         | 0.1  | V                         |
|                                |                           | I <sub>O</sub> = 1.1 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.1 V   | [2]    | -                         | -    | 0.3 × V <sub>CCO</sub>    |
|                                |                           | I <sub>O</sub> = 1.7 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.4 V   |        | -                         | -    | 0.31                      |
|                                |                           | I <sub>O</sub> = 1.9 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.65 V  |        | -                         | -    | 0.31                      |
|                                |                           | I <sub>O</sub> = 2.3 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 2.3 V   |        | -                         | -    | 0.31                      |
|                                |                           | I <sub>O</sub> = 3.1 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 2.3 V   |        | -                         | -    | 0.44                      |
|                                |                           | I <sub>O</sub> = 2.7 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 3.0 V   |        | -                         | -    | 0.31                      |
|                                |                           | I <sub>O</sub> = 4.0 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 3.0 V   |        | -                         | -    | 0.44                      |
| I <sub>I</sub>                 | input leakage current     | DIR input; V <sub>I</sub> = GND to V <sub>CC(A)</sub> ;<br>V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.1 V to 3.6 V      | -      | -                         | ±0.1 | µA                        |

**Table 7. Static characteristics ...continued**

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

| Symbol           | Parameter                            | Conditions  | Min    | Typ | Max                   | Unit                  |
|------------------|--------------------------------------|---|--------|-----|-----------------------|-----------------------|
| $I_{OZ}$         | OFF-state output current             | A or B port; $V_I = V_{IH}$ or $V_{IL}$ ; $V_O = 0 \text{ V}$ to $V_{CCO}$ ; $V_{CC(A)} = V_{CC(B)} = 1.1 \text{ V}$ to $3.6 \text{ V}$                       | [2]    | -   | -                     | $\pm 0.1 \mu\text{A}$ |
| $I_{OFF}$        | power-off leakage current            | A port; $V_I$ or $V_O = 0 \text{ V}$ to $3.6 \text{ V}$ ; $V_{CC(A)} = 0 \text{ V}$ ; $V_{CC(B)} = 1.1 \text{ V}$ to $3.6 \text{ V}$                          | -      | -   | $\pm 0.2 \mu\text{A}$ |                       |
|                  |                                      | B port; $V_I$ or $V_O = 0 \text{ V}$ to $3.6 \text{ V}$ ; $V_{CC(B)} = 0 \text{ V}$ ; $V_{CC(A)} = 1.1 \text{ V}$ to $3.6 \text{ V}$                          | -      | -   | $\pm 0.2 \mu\text{A}$ |                       |
|                  |                                      | DIR input; $V_I$ or $V_O = 0 \text{ V}$ to $3.6 \text{ V}$ ; $V_{CC(A)} = 0 \text{ V}$ ; $V_{CC(B)} = 1.1 \text{ V}$ to $3.6 \text{ V}$                       | -      | -   | $\pm 0.2 \mu\text{A}$ |                       |
| $\Delta I_{OFF}$ | additional power-off leakage current | A port; $V_I$ or $V_O = 0 \text{ V}$ to $3.6 \text{ V}$ ; $V_{CC(A)} = 0 \text{ V}$ to $0.2 \text{ V}$ ; $V_{CC(B)} = 1.1 \text{ V}$ to $3.6 \text{ V}$       | -      | -   | $\pm 0.2 \mu\text{A}$ |                       |
|                  |                                      | B port; $V_I$ or $V_O = 0 \text{ V}$ to $3.6 \text{ V}$ ; $V_{CC(B)} = 0 \text{ V}$ to $0.2 \text{ V}$ ; $V_{CC(A)} = 1.1 \text{ V}$ to $3.6 \text{ V}$       | -      | -   | $\pm 0.2 \mu\text{A}$ |                       |
|                  |                                      | DIR input; $V_I$ or $V_O = 0 \text{ V}$ to $3.6 \text{ V}$ ; $V_{CC(A)} = 0 \text{ V}$ to $0.2 \text{ V}$ ; $V_{CC(B)} = 1.1 \text{ V}$ to $3.6 \text{ V}$    | -      | -   | $\pm 0.2 \mu\text{A}$ |                       |
| $I_{CC}$         | supply current                       | A port; $V_I = \text{GND}$ or $V_{CCI}$ ; $I_O = 0 \text{ A}$   | [1]    |     |                       |                       |
|                  |                                      | $V_{CC(A)} = V_{CC(B)} = 1.1 \text{ V}$ to $3.6 \text{ V}$  | -      | -   | $0.5 \mu\text{A}$     |                       |
|                  |                                      | $V_{CC(A)} = 3.6 \text{ V}$ ; $V_{CC(B)} = 0 \text{ V}$   | -      | -   | $0.5 \mu\text{A}$     |                       |
|                  |                                      | $V_{CC(A)} = 0 \text{ V}$ ; $V_{CC(B)} = 3.6 \text{ V}$   | -      | 0   | -                     | $\mu\text{A}$         |
|                  |                                      | B port; $V_I = \text{GND}$ or $V_{CCI}$ ; $I_O = 0 \text{ A}$   | [1]    |     |                       |                       |
|                  |                                      | $V_{CC(A)} = V_{CC(B)} = 1.1 \text{ V}$ to $3.6 \text{ V}$  | -      | -   | $0.5 \mu\text{A}$     |                       |
|                  |                                      | $V_{CC(A)} = 3.6 \text{ V}$ ; $V_{CC(B)} = 0 \text{ V}$   | -      | 0   | -                     | $\mu\text{A}$         |
|                  |                                      | $V_{CC(A)} = 0 \text{ V}$ ; $V_{CC(B)} = 3.6 \text{ V}$   | -      | -   | $0.5 \mu\text{A}$     |                       |
|                  |                                      | A plus B port ( $I_{CC(A)} + I_{CC(B)}$ ); $I_O = 0 \text{ A}$ ; $V_I = \text{GND}$ or $V_{CCI}$ ; $V_{CC(A)} = V_{CC(B)} = 1.1 \text{ V}$ to $3.6 \text{ V}$ | [1]    | -   | -                     | $0.5 \mu\text{A}$     |
| $\Delta I_{CC}$  | additional supply current            | A port; $V_{CC(A)} = V_{CC(B)} = 3.3 \text{ V}$ ; A port at $V_{CC(A)} - 0.6 \text{ V}$ ; DIR at $V_{CC(A)}$ ; B port = open                                  | -      | -   | 40                    | $\mu\text{A}$         |
|                  |                                      | B port; $V_{CC(A)} = V_{CC(B)} = 3.3 \text{ V}$ ; B port at $V_{CC(B)} - 0.6 \text{ V}$ ; DIR at GND; A port = open   | -      | -   | 40                    | $\mu\text{A}$         |
|                  |                                      | DIR input; $V_{CC(A)} = V_{CC(B)} = 3.3 \text{ V}$ ; A port at $V_{CC(A)}$ or GND; B port = open; DIR at $V_{CC(A)} - 0.6 \text{ V}$                          | -      | -   | 40                    | $\mu\text{A}$         |
| $C_I$            | input capacitance                    | DIR input; $V_I = \text{GND}$ or $V_{CC(A)}$ ; $V_{CC(A)} = V_{CC(B)} = 1.1 \text{ V}$ to $3.6 \text{ V}$   | -      | 0.9 | -                     | $\text{pF}$           |
| $C_{I/O}$        | input/output capacitance             | A and B port; suspend mode; $V_{CCI} = 0 \text{ V}$ ; $V_{CCO} = 1.1 \text{ V}$ to $3.6 \text{ V}$ ; $V_O = V_{CCO}$ or GND                                   | [1][2] | -   | 2.0                   | $\text{pF}$           |

**Table 7. Static characteristics ...continued**

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

| Symbol                                    | Parameter                 | Conditions   | Min                    | Typ                     | Max                    | Unit                    |   |
|---|---------------------------|--|------------------------|-------------------------|------------------------|-------------------------|---|
| <b>T<sub>amb</sub> = -40 °C to +85 °C</b> |                           |  |                        |                         |                        |                         |   |
| V <sub>IH</sub>                           | HIGH-level input voltage  | data input<br>V <sub>CCI</sub> = 1.1 V to 1.95 V<br>V <sub>CCI</sub> = 2.3 V to 2.7 V<br>V <sub>CCI</sub> = 3.0 V to 3.6 V<br>DIR input<br>V <sub>CCI</sub> = 1.1 V to 1.95 V<br>V <sub>CCI</sub> = 2.3 V to 2.7 V<br>V <sub>CCI</sub> = 3.0 V to 3.6 V  | [1][3]                 | 0.65 × V <sub>CCI</sub> | -                      | -                       | V |
|   |                           |  | 1.6                    | -                       | -                      | V                       |   |
|   |                           |  | 2.0                    | -                       | -                      | V                       |   |
| V <sub>IL</sub>                           | LOW-level input voltage   | data input<br>V <sub>CCI</sub> = 1.1 V to 1.95 V<br>V <sub>CCI</sub> = 2.3 V to 2.7 V<br>V <sub>CCI</sub> = 3.0 V to 3.6 V<br>DIR input<br>V <sub>CCI</sub> = 1.1 V to 1.95 V<br>V <sub>CCI</sub> = 2.3 V to 2.7 V<br>V <sub>CCI</sub> = 3.0 V to 3.6 V  | [1][3]                 | -                       | -                      | 0.35 × V <sub>CCI</sub> | V |
|   |                           |  | -                      | -                       | 0.7                    | V                       |   |
|   |                           |  | -                      | -                       | 0.9                    | V                       |   |
| V <sub>OH</sub>                           | HIGH-level output voltage | V <sub>I</sub> = V <sub>IH</sub><br>I <sub>O</sub> = -20 µA;<br>V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.1 V to 3.6 V<br>I <sub>O</sub> = -1.1 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.1 V<br>I <sub>O</sub> = -1.7 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.4 V<br>I <sub>O</sub> = -1.9 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.65 V<br>I <sub>O</sub> = -2.3 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 2.3 V<br>I <sub>O</sub> = -3.1 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 2.3 V<br>I <sub>O</sub> = -2.7 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 3.0 V<br>I <sub>O</sub> = -4.0 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 3.0 V | [2]                    | V <sub>CCO</sub> - 0.1  | -                      | -                       | V |
|   |                           |  | 0.7 × V <sub>CCO</sub> | -                       | -                      | V                       |   |
|   |                           |  | 1.03                   | -                       | -                      | V                       |   |
|   |                           |  | 1.30                   | -                       | -                      | V                       |   |
|   |                           |  | 1.97                   | -                       | -                      | V                       |   |
|   |                           |  | 1.85                   | -                       | -                      | V                       |   |
|   |                           |  | 2.67                   | -                       | -                      | V                       |   |
|   |                           |  | 2.55                   | -                       | -                      | V                       |   |
| V <sub>OL</sub>                           | LOW-level output voltage  | V <sub>I</sub> = V <sub>IL</sub><br>I <sub>O</sub> = 20 µA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.1 V to 3.6 V<br>I <sub>O</sub> = 1.1 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.1 V<br>I <sub>O</sub> = 1.7 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.4 V<br>I <sub>O</sub> = 1.9 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.65 V<br>I <sub>O</sub> = 2.3 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 2.3 V<br>I <sub>O</sub> = 3.1 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 2.3 V<br>I <sub>O</sub> = 2.7 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 3.0 V<br>I <sub>O</sub> = 4.0 mA; V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 3.0 V            | -                      | -                       | 0.1                    | V                       |   |
|   |                           |  | [2]                    | -                       | 0.3 × V <sub>CCO</sub> | V                       |   |
|   |                           |  | -                      | -                       | 0.37                   | V                       |   |
|   |                           |  | -                      | -                       | 0.35                   | V                       |   |
|   |                           |  | -                      | -                       | 0.33                   | V                       |   |
|   |                           |  | -                      | -                       | 0.45                   | V                       |   |
|   |                           |  | -                      | -                       | 0.33                   | V                       |   |
|   |                           |  | -                      | -                       | 0.45                   | V                       |   |
| I <sub>I</sub>                            | input leakage current     | DIR input; V <sub>I</sub> = GND to V <sub>CC(A)</sub> ;<br>V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.1 V to 3.6 V  | -                      | -                       | ±0.5                   | µA                      |   |
| I <sub>OZ</sub>                           | OFF-state output current  | A or B port; V <sub>I</sub> = V <sub>IH</sub> or V <sub>IL</sub> ; V <sub>O</sub> = 0 V to V <sub>CCO</sub> ;<br>V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.1 V to 3.6 V  | [2]                    | -                       | ±0.5                   | µA                      |   |

**Table 7. Static characteristics ...continued**

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

| Symbol           | Parameter                            | Conditions  | Min                         | Typ                    | Max       | Unit    |
|------------------|--------------------------------------|---|-----------------------------|------------------------|-----------|---------|
| $I_{OFF}$        | power-off leakage current            | A port; $V_I$ or $V_O = 0$ V to 3.6 V;<br>$V_{CC(A)} = 0$ V; $V_{CC(B)} = 1.1$ V to 3.6 V   | -                           | -                      | $\pm 0.5$ | $\mu A$ |
|                  |                                      | B port; $V_I$ or $V_O = 0$ V to 3.6 V;<br>$V_{CC(B)} = 0$ V; $V_{CC(A)} = 1.1$ V to 3.6 V   | -                           | -                      | $\pm 0.5$ | $\mu A$ |
|                  |                                      | DIR input; $V_I$ or $V_O = 0$ V to 3.6 V;<br>$V_{CC(A)} = 0$ V; $V_{CC(B)} = 1.1$ V to 3.6 V                                      | -                           | -                      | $\pm 0.5$ | $\mu A$ |
| $\Delta I_{OFF}$ | additional power-off leakage current | A port; $V_I$ or $V_O = 0$ V to 3.6 V;<br>$V_{CC(A)} = 0$ V to 0.2 V; $V_{CC(B)} = 1.1$ V to 3.6 V                                | -                           | -                      | $\pm 0.6$ | $\mu A$ |
|                  |                                      | B port; $V_I$ or $V_O = 0$ V to 3.6 V;<br>$V_{CC(B)} = 0$ V to 0.2 V; $V_{CC(A)} = 1.1$ V to 3.6 V                                | -                           | -                      | $\pm 0.6$ | $\mu A$ |
|                  |                                      | DIR input; $V_I$ or $V_O = 0$ V to 3.6 V;<br>$V_{CC(A)} = 0$ V to 0.2 V; $V_{CC(B)} = 1.1$ V to 3.6 V                             | -                           | -                      | $\pm 0.6$ | $\mu A$ |
| $I_{CC}$         | supply current                       | A port; $V_I = GND$ or $V_{CCI}$ ; $I_O = 0$ A<br>$V_{CC(A)} = V_{CC(B)} = 1.1$ V to 3.6 V  | [1]                         | -                      | -         | $\mu A$ |
|                  |                                      | $V_{CC(A)} = 3.6$ V; $V_{CC(B)} = 0$ V  | -                           | -                      | 0.9       | $\mu A$ |
|                  |                                      | $V_{CC(A)} = 0$ V; $V_{CC(B)} = 3.6$ V  | -                           | 0                      | -         | $\mu A$ |
|                  |                                      | B port; $V_I = GND$ or $V_{CCI}$ ; $I_O = 0$ A<br>$V_{CC(A)} = V_{CC(B)} = 1.1$ V to 3.6 V  | [1]                         | -                      | -         | $\mu A$ |
|                  |                                      | $V_{CC(A)} = 3.6$ V; $V_{CC(B)} = 0$ V  | -                           | 0                      | -         | $\mu A$ |
|                  |                                      | $V_{CC(A)} = 0$ V; $V_{CC(B)} = 3.6$ V  | -                           | -                      | 0.9       | $\mu A$ |
|                  |                                      | A plus B port ( $I_{CC(A)} + I_{CC(B)}$ ); $I_O = 0$ A;<br>$V_I = GND$ or $V_{CCI}$ ;<br>$V_{CC(A)} = V_{CC(B)} = 1.1$ V to 3.6 V | [1]                         | -                      | -         | $\mu A$ |
|                  |                                      | A port; $V_{CC(A)} = V_{CC(B)} = 3.3$ V;<br>A port at $V_{CC(A)} - 0.6$ V;<br>DIR at $V_{CC(A)}$ ; B port = open                  | -                           | -                      | 50        | $\mu A$ |
|                  |                                      | B port; $V_{CC(A)} = V_{CC(B)} = 3.3$ V;<br>B port at $V_{CC(B)} - 0.6$ V;<br>DIR at GND; A port = open                           | -                           | -                      | 50        | $\mu A$ |
| $\Delta I_{CC}$  | additional supply current            | DIR input; $V_{CC(A)} = V_{CC(B)} = 3.3$ V;<br>A port at $V_{CC(A)}$ or GND; B port = open;<br>DIR at $V_{CC(A)} - 0.6$ V         | -                           | -                      | 50        | $\mu A$ |
|                  |                                      | <b><math>T_{amb} = -40</math> °C to +125 °C</b>   |                             |                        |           |         |
|                  |                                      | HIGH-level input voltage  | data input                  |                        | [1][3]    |         |
|                  |                                      | $V_{IH}$  | $V_{CCI} = 1.1$ V to 1.95 V | $0.7 \times V_{CCI}$   | -         | -       |
|                  |                                      |   | $V_{CCI} = 2.3$ V to 2.7 V  | 1.6                    | -         | -       |
|                  |                                      |   | $V_{CCI} = 3.0$ V to 3.6 V  | 2.0                    | -         | -       |
|                  |                                      | DIR input   | [1][4]                      |                        |           |         |
|                  |                                      | $V_{IH}$  | $V_{CCI} = 1.1$ V to 1.95 V | $0.7 \times V_{CC(A)}$ | -         | -       |
|                  |                                      |   | $V_{CCI} = 2.3$ V to 2.7 V  | 1.6                    | -         | -       |
|                  |                                      |   | $V_{CCI} = 3.0$ V to 3.6 V  | 2.0                    | -         | -       |

**Table 7. Static characteristics ...continued**

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

| Symbol    | Parameter                 | Conditions  | Min    | Typ                  | Max                    | Unit          |
|-----------|---------------------------|---|--------|----------------------|------------------------|---------------|
| $V_{IL}$  | LOW-level input voltage   | data input  | [1][3] |                      |                        |               |
|           |                           | $V_{CC1} = 1.1 \text{ V to } 1.95 \text{ V}$  | -      | -                    | $0.3 \times V_{CC1}$   | V             |
|           |                           | $V_{CC1} = 2.3 \text{ V to } 2.7 \text{ V}$   | -      | -                    | 0.7                    | V             |
|           |                           | $V_{CC1} = 3.0 \text{ V to } 3.6 \text{ V}$   | -      | -                    | 0.9                    | V             |
|           | DIR input                 |   | [1][4] |                      |                        |               |
|           |                           | $V_{CC1} = 1.1 \text{ V to } 1.95 \text{ V}$  | -      | -                    | $0.3 \times V_{CC(A)}$ | V             |
|           |                           | $V_{CC1} = 2.3 \text{ V to } 2.7 \text{ V}$   | -      | -                    | 0.7                    | V             |
|           |                           | $V_{CC1} = 3.0 \text{ V to } 3.6 \text{ V}$   | -      | -                    | 0.9                    | V             |
| $V_{OH}$  | HIGH-level output voltage | $V_I = V_{IH}$  |        |                      |                        |               |
|           |                           | $I_O = -20 \mu\text{A}; V_{CC(A)} = V_{CC(B)} = 1.1 \text{ V to } 3.6 \text{ V}$  | [2]    | $V_{CCO} - 0.11$     | -                      | -             |
|           |                           | $I_O = -1.1 \text{ mA}; V_{CC(A)} = V_{CC(B)} = 1.1 \text{ V}$  | [2]    | $0.6 \times V_{CCO}$ | -                      | -             |
|           |                           | $I_O = -1.7 \text{ mA}; V_{CC(A)} = V_{CC(B)} = 1.4 \text{ V}$  | 0.93   | -                    | -                      | V             |
|           |                           | $I_O = -1.9 \text{ mA}; V_{CC(A)} = V_{CC(B)} = 1.65 \text{ V}$   | 1.17   | -                    | -                      | V             |
|           |                           | $I_O = -2.3 \text{ mA}; V_{CC(A)} = V_{CC(B)} = 2.3 \text{ V}$  | 1.77   | -                    | -                      | V             |
|           |                           | $I_O = -3.1 \text{ mA}; V_{CC(A)} = V_{CC(B)} = 2.3 \text{ V}$  | 1.67   | -                    | -                      | V             |
|           |                           | $I_O = -2.7 \text{ mA}; V_{CC(A)} = V_{CC(B)} = 3.0 \text{ V}$  | 2.40   | -                    | -                      | V             |
|           |                           | $I_O = -4.0 \text{ mA}; V_{CC(A)} = V_{CC(B)} = 3.0 \text{ V}$  | 2.30   | -                    | -                      | V             |
| $V_{OL}$  | LOW-level output voltage  | $V_I = V_{IL}$  |        |                      |                        |               |
|           |                           | $I_O = 20 \mu\text{A}; V_{CC(A)} = V_{CC(B)} = 1.1 \text{ V to } 3.6 \text{ V}$   | -      | -                    | 0.11                   | V             |
|           |                           | $I_O = 1.1 \text{ mA}; V_{CC(A)} = V_{CC(B)} = 1.1 \text{ V}$   | [2]    | -                    | $0.33 \times V_{CCO}$  | V             |
|           |                           | $I_O = 1.7 \text{ mA}; V_{CC(A)} = V_{CC(B)} = 1.4 \text{ V}$   | -      | -                    | 0.41                   | V             |
|           |                           | $I_O = 1.9 \text{ mA}; V_{CC(A)} = V_{CC(B)} = 1.65 \text{ V}$  | -      | -                    | 0.39                   | V             |
|           |                           | $I_O = 2.3 \text{ mA}; V_{CC(A)} = V_{CC(B)} = 2.3 \text{ V}$   | -      | -                    | 0.36                   | V             |
|           |                           | $I_O = 3.1 \text{ mA}; V_{CC(A)} = V_{CC(B)} = 2.3 \text{ V}$   | -      | -                    | 0.50                   | V             |
|           |                           | $I_O = 2.7 \text{ mA}; V_{CC(A)} = V_{CC(B)} = 3.0 \text{ V}$   | -      | -                    | 0.36                   | V             |
| $I_I$     | input leakage current     | $I_I = 20 \mu\text{A}; V_{CC(A)} = V_{CC(B)} = 1.1 \text{ V to } 3.6 \text{ V}$   | -      | -                    | $\pm 0.75$             | $\mu\text{A}$ |
|           |                           | $I_I = 1.1 \text{ mA}; V_{CC(A)} = V_{CC(B)} = 1.1 \text{ V to } 3.6 \text{ V}$   | [2]    | -                    | $\pm 0.75$             | $\mu\text{A}$ |
| $I_{OZ}$  | OFF-state output current  | A or B port; $V_I = V_{IH}$ or $V_{IL}$ ; $V_O = 0 \text{ V to } V_{CCO}$ ; $V_{CC(A)} = V_{CC(B)} = 1.1 \text{ V to } 3.6 \text{ V}$ | [2]    | -                    | $\pm 0.75$             | $\mu\text{A}$ |
| $I_{OFF}$ | power-off leakage current | A port; $V_I$ or $V_O = 0 \text{ V to } 3.6 \text{ V}$ ; $V_{CC(A)} = 0 \text{ V}; V_{CC(B)} = 1.1 \text{ V to } 3.6 \text{ V}$       | -      | -                    | $\pm 0.75$             | $\mu\text{A}$ |
|           |                           | B port; $V_I$ or $V_O = 0 \text{ V to } 3.6 \text{ V}$ ; $V_{CC(B)} = 0 \text{ V}; V_{CC(A)} = 1.1 \text{ V to } 3.6 \text{ V}$       | -      | -                    | $\pm 0.75$             | $\mu\text{A}$ |
|           |                           | DIR input; $V_I$ or $V_O = 0 \text{ V to } 3.6 \text{ V}$ ; $V_{CC(A)} = 0 \text{ V}; V_{CC(B)} = 1.1 \text{ V to } 3.6 \text{ V}$    | -      | -                    | $\pm 0.75$             | $\mu\text{A}$ |

**Table 7. Static characteristics ...continued**

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

| Symbol           | Parameter                            | Conditions  | Min | Typ | Max        | Unit    |
|------------------|--------------------------------------|---|-----|-----|------------|---------|
| $\Delta I_{OFF}$ | additional power-off leakage current | A port; $V_I$ or $V_O = 0$ V to 3.6 V;<br>$V_{CC(A)} = 0$ V to 0.2 V; $V_{CC(B)} = 1.1$ V to 3.6 V                                | -   | -   | $\pm 0.75$ | $\mu A$ |
|                  |                                      | B port; $V_I$ or $V_O = 0$ V to 3.6 V;<br>$V_{CC(B)} = 0$ V to 0.2 V; $V_{CC(A)} = 1.1$ V to 3.6 V                                | -   | -   | $\pm 0.75$ | $\mu A$ |
|                  |                                      | DIR input; $V_I$ or $V_O = 0$ V to 3.6 V;<br>$V_{CC(A)} = 0$ V to 0.2 V; $V_{CC(B)} = 1.1$ V to 3.6 V                             | -   | -   | $\pm 0.75$ | $\mu A$ |
| $I_{CC}$         | supply current                       | A port; $V_I = GND$ or $V_{CCI}$ ; $I_O = 0$ A<br>$V_{CC(A)} = V_{CC(B)} = 1.1$ V to 3.6 V  | [1] | -   | -          | $\mu A$ |
|                  |                                      | $V_{CC(A)} = 3.6$ V; $V_{CC(B)} = 0$ V  | -   | -   | 1.4        | $\mu A$ |
|                  |                                      | $V_{CC(A)} = 0$ V; $V_{CC(B)} = 3.6$ V  | -   | 0   | -          | $\mu A$ |
|                  |                                      | B port; $V_I = GND$ or $V_{CCI}$ ; $I_O = 0$ A<br>$V_{CC(A)} = V_{CC(B)} = 1.1$ V to 3.6 V  | [1] | -   | -          | $\mu A$ |
|                  |                                      | $V_{CC(A)} = 3.6$ V; $V_{CC(B)} = 0$ V  | -   | 0   | -          | $\mu A$ |
|                  |                                      | $V_{CC(A)} = 0$ V; $V_{CC(B)} = 3.6$ V  | -   | -   | 1.4        | $\mu A$ |
|                  |                                      | A plus B port ( $I_{CC(A)} + I_{CC(B)}$ ); $I_O = 0$ A;<br>$V_I = GND$ or $V_{CCI}$ ;<br>$V_{CC(A)} = V_{CC(B)} = 1.1$ V to 3.6 V | [1] | -   | -          | $\mu A$ |
|                  |                                      | A port; $V_{CC(A)} = V_{CC(B)} = 3.3$ V;<br>A port at $V_{CC(A)} - 0.6$ V;<br>DIR at $V_{CC(A)}$ ; B port = open                  | -   | -   | 75         | $\mu A$ |
|                  |                                      | B port; $V_{CC(A)} = V_{CC(B)} = 3.3$ V;<br>B port at $V_{CC(B)} - 0.6$ V;<br>DIR at GND; A port = open                           | -   | -   | 75         | $\mu A$ |
|                  |                                      | DIR input; $V_{CC(A)} = V_{CC(B)} = 3.3$ V;<br>A port at $V_{CC(A)}$ or GND; B port = open;<br>DIR at $V_{CC(A)} - 0.6$ V         | -   | -   | 75         | $\mu A$ |

[1]  $V_{CCI}$  is the supply voltage associated with the data input port.[2]  $V_{CCO}$  is the supply voltage associated with the output port.[3] For  $V_{CCI}$  values not specified in the data sheet: minimum  $V_{IH} = 0.7 \times V_{CCI}$  and maximum  $V_{IL} = 0.3 \times V_{CCI}$ .[4] For  $V_{CCI}$  values not specified in the data sheet: minimum  $V_{IH} = 0.7 \times V_{CC(A)}$  and maximum  $V_{IL} = 0.3 \times V_{CC(A)}$ .[5] All unused data inputs of the device must be held at  $V_{CCI}$  or GND to ensure proper device operation.

## 11. Dynamic characteristics

**Table 8. Dynamic characteristics**Voltages are referenced to GND (ground = 0 V); for test circuit see [Figure 8](#).

| Symbol  | Parameter         | Conditions                                     | 25 °C |                    |      | −40 °C to +125 °C |             |              | Unit |
|---|-------------------|--|-------|--------------------|------|-------------------|-------------|--------------|------|
|   |                   |  | Min   | Typ <sup>[1]</sup> | Max  | Min               | Max (85 °C) | Max (125 °C) |      |
| <b>C<sub>L</sub> = 5 pF; V<sub>CC(A)</sub> = 1.1 V to 1.3 V</b> |                   |  |       |                    |      |                   |             |              |      |
| t <sub>pd</sub>   | propagation delay | A to B or B to A; see <a href="#">Figure 6</a> | [2]   |                    |      |                   |             |              |      |
|   |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V            | 2.8   | 15.4               | 28.0 | 2.4               | 28.3        | 31.2         | ns   |
|   |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V            | 2.8   | 10.2               | 16.2 | 2.6               | 17.5        | 19.3         | ns   |
|   |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V          | 2.4   | 8.1                | 13.0 | 2.2               | 14.4        | 15.9         | ns   |
|   |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V            | 2.5   | 6.3                | 10.0 | 2.1               | 10.7        | 11.8         | ns   |
|   |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V            | 2.3   | 5.6                | 9.0  | 1.9               | 9.7         | 10.7         | ns   |
| t <sub>dis</sub>  | disable time      | DIR to A; see <a href="#">Figure 7</a>         | [3]   |                    |      |                   |             |              |      |
|   |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V            | 2.7   | 5.3                | 8.5  | 2.5               | 8.7         | 9.6          | ns   |
|   |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V            | 2.9   | 5.3                | 8.4  | 2.7               | 8.7         | 9.7          | ns   |
|   |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V          | 2.7   | 5.3                | 8.5  | 2.5               | 9.0         | 10.0         | ns   |
|   |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V            | 2.7   | 5.3                | 8.7  | 2.5               | 8.9         | 9.9          | ns   |
|   |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V            | 2.9   | 5.3                | 8.7  | 2.5               | 9.1         | 10.1         | ns   |
|   |                   | DIR to B; see <a href="#">Figure 7</a>         | [3]   |                    |      |                   |             |              |      |
|   |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V            | 6.1   | 13.2               | 22.1 | 5.4               | 23.4        | 25.8         | ns   |
|   |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V            | 5.0   | 9.3                | 13.9 | 4.4               | 15.2        | 16.7         | ns   |
|   |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V          | 4.2   | 8.1                | 12.3 | 3.6               | 13.5        | 14.9         | ns   |
|   |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V            | 3.3   | 6.3                | 9.3  | 2.9               | 10.2        | 11.2         | ns   |
|   |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V            | 3.6   | 6.3                | 9.2  | 3.2               | 9.7         | 10.7         | ns   |
| <b>C<sub>L</sub> = 5 pF; V<sub>CC(A)</sub> = 1.4 V to 1.6 V</b> |                   |  |       |                    |      |                   |             |              |      |
| t <sub>pd</sub>   | propagation delay | A to B or B to A; see <a href="#">Figure 6</a> | [2]   |                    |      |                   |             |              |      |
|   |                   | V <sub>CC(B)</sub> = 1.1 V to 1.3 V            | 2.5   | 14.5               | 26.6 | 2.2               | 27.1        | 29.9         | ns   |
|   |                   | V <sub>CC(B)</sub> = 1.4 V to 1.6 V            | 2.5   | 9.4                | 14.5 | 2.3               | 15.9        | 17.5         | ns   |
|   |                   | V <sub>CC(B)</sub> = 1.65 V to 1.95 V          | 2.1   | 7.4                | 11.2 | 1.9               | 12.7        | 14.0         | ns   |
|   |                   | V <sub>CC(B)</sub> = 2.3 V to 2.7 V            | 2.2   | 5.5                | 8.0  | 1.8               | 8.9         | 9.8          | ns   |
|   |                   | V <sub>CC(B)</sub> = 3.0 V to 3.6 V            | 2.0   | 4.7                | 6.8  | 1.6               | 7.6         | 8.4          | ns   |

**Table 8. Dynamic characteristics ...continued**Voltages are referenced to GND (ground = 0 V); for test circuit see [Figure 8](#).

| Symbol  | Parameter   | Conditions                                      | 25 °C |                    |      | −40 °C to +125 °C |             |              | Unit |
|---|-------------|---|-------|--------------------|------|-------------------|-------------|--------------|------|
|   |             |   | Min   | Typ <sup>[1]</sup> | Max  | Min               | Max (85 °C) | Max (125 °C) |      |
| $t_{dis}$   | enable time | DIR to A; see <a href="#">Figure 7</a>          | [3]   |                    |      |                   |             |              |      |
|   |             | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 2.0   | 3.8                | 5.3  | 1.9               | 5.7         | 6.3          | ns   |
|   |             | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 2.2   | 3.8                | 5.3  | 2.0               | 5.7         | 6.4          | ns   |
|   |             | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 2.1   | 3.8                | 5.5  | 1.8               | 5.9         | 6.6          | ns   |
|   |             | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 2.1   | 3.8                | 5.5  | 1.9               | 5.9         | 6.6          | ns   |
|   |             | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 2.2   | 3.8                | 5.5  | 1.9               | 6.0         | 6.6          | ns   |
|   |             | DIR to B; see <a href="#">Figure 7</a>          | [3]   |                    |      |                   |             |              |      |
|   |             | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 5.7   | 12.7               | 21.0 | 5.2               | 22.3        | 24.6         | ns   |
|   |             | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 4.7   | 8.7                | 12.7 | 4.1               | 14.1        | 15.5         | ns   |
|   |             | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 3.9   | 7.4                | 10.9 | 3.3               | 12.3        | 13.5         | ns   |
| $C_L = 5 \text{ pF}; V_{CC(A)} = 1.65 \text{ V to } 1.95 \text{ V}$ | $t_{pd}$    | A to B or B to A; see <a href="#">Figure 6</a>  | [2]   |                    |      |                   |             |              |      |
|   |             | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 2.4   | 14.2               | 26.1 | 2.0               | 26.5        | 29.2         | ns   |
|   |             | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 2.4   | 9.1                | 13.9 | 2.1               | 15.4        | 17.0         | ns   |
|   |             | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 2.0   | 7.0                | 10.7 | 1.7               | 12.1        | 13.4         | ns   |
|   |             | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 2.0   | 5.1                | 7.4  | 1.6               | 8.2         | 9.1          | ns   |
|   |             | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 1.9   | 4.3                | 6.1  | 1.5               | 6.9         | 7.7          | ns   |
|   |             | DIR to A; see <a href="#">Figure 7</a>          | [3]   |                    |      |                   |             |              |      |
|   |             | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 2.0   | 3.5                | 4.8  | 1.8               | 5.2         | 5.8          | ns   |
|   |             | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 2.1   | 3.5                | 4.8  | 1.9               | 5.2         | 5.7          | ns   |
|   |             | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 2.0   | 3.5                | 5.0  | 1.8               | 5.4         | 6.0          | ns   |
| $C_L = 5 \text{ pF}; V_{CC(A)} = 2.3 \text{ V to } 2.7 \text{ V}$   | $t_{pd}$    | DIR to B; see <a href="#">Figure 7</a>          | [3]   |                    |      |                   |             |              |      |
|   |             | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 5.8   | 12.4               | 20.6 | 5.1               | 21.9        | 24.2         | ns   |
|   |             | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 4.6   | 8.4                | 12.2 | 3.9               | 13.5        | 14.9         | ns   |
|   |             | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 3.8   | 7.1                | 10.4 | 3.2               | 11.8        | 13.0         | ns   |
|   |             | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 2.9   | 5.2                | 7.3  | 2.5               | 8.3         | 9.1          | ns   |
|   |             | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 3.1   | 5.1                | 6.9  | 2.7               | 7.5         | 8.3          | ns   |
|   |             | DIR to A; see <a href="#">Figure 7</a>          | [3]   |                    |      |                   |             |              |      |
|   |             | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 2.4   | 13.6               | 25.5 | 2.0               | 25.9        | 28.6         | ns   |
|   |             | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 2.3   | 8.5                | 13.3 | 2.1               | 14.7        | 16.2         | ns   |
|   |             | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 1.9   | 6.5                | 10.0 | 1.7               | 11.4        | 12.5         | ns   |

**Table 8. Dynamic characteristics ...continued**Voltages are referenced to GND (ground = 0 V); for test circuit see [Figure 8](#).

| Symbol   | Parameter    | Conditions                                      | 25 °C |                    |      | −40 °C to +125 °C |             |              | Unit |
|--|--------------|---|-------|--------------------|------|-------------------|-------------|--------------|------|
|  |              |   | Min   | Typ <sup>[1]</sup> | Max  | Min               | Max (85 °C) | Max (125 °C) |      |
| $t_{dis}$  | disable time | DIR to A; see <a href="#">Figure 7</a>          | [3]   |                    |      |                   |             |              |      |
|  |              | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 1.4   | 2.5                | 3.3  | 1.3               | 3.6         | 4.0          | ns   |
|  |              | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 1.6   | 2.5                | 3.3  | 1.4               | 3.6         | 4.0          | ns   |
|  |              | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 1.5   | 2.5                | 3.4  | 1.3               | 3.8         | 4.2          | ns   |
|  |              | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 1.4   | 2.5                | 3.4  | 1.3               | 3.8         | 4.2          | ns   |
|  |              | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 1.6   | 2.5                | 3.4  | 1.3               | 3.7         | 4.1          | ns   |
|  |              | DIR to B; see <a href="#">Figure 7</a>          | [3]   |                    |      |                   |             |              |      |
|  |              | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 5.8   | 12.3               | 20.4 | 5.1               | 21.8        | 24.0         | ns   |
|  |              | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 4.5   | 8.3                | 11.9 | 4.0               | 13.2        | 14.5         | ns   |
|  |              | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 3.7   | 7.0                | 10.0 | 3.2               | 11.3        | 12.5         | ns   |
| $C_L = 5 \text{ pF}; V_{CC(A)} = 3.0 \text{ V to } 3.6 \text{ V}$  | $t_{pd}$     | A to B or B to A; see <a href="#">Figure 6</a>  | [2]   |                    |      |                   |             |              |      |
|  |              | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 2.3   | 13.1               | 24.9 | 2.0               | 25.2        | 27.8         | ns   |
|  |              | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 2.3   | 8.1                | 12.8 | 2.0               | 14.1        | 15.5         | ns   |
|  |              | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 1.9   | 6.1                | 9.5  | 1.7               | 10.8        | 12.0         | ns   |
|  |              | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 1.9   | 4.3                | 6.2  | 1.6               | 7.0         | 7.7          | ns   |
|  |              | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 1.7   | 3.5                | 5.0  | 1.4               | 5.7         | 6.3          | ns   |
|  |              | DIR to A; see <a href="#">Figure 7</a>          | [3]   |                    |      |                   |             |              |      |
|  |              | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 1.7   | 2.8                | 3.5  | 1.5               | 3.8         | 4.2          | ns   |
|  |              | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 1.8   | 2.8                | 3.5  | 1.7               | 3.8         | 4.2          | ns   |
|  |              | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 1.7   | 2.8                | 3.6  | 1.5               | 4.0         | 4.4          | ns   |
| $C_L = 10 \text{ pF}; V_{CC(A)} = 1.1 \text{ V to } 1.3 \text{ V}$ | $t_{pd}$     | A to B or B to A; see <a href="#">Figure 6</a>  | [2]   |                    |      |                   |             |              |      |
|  |              | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 3.0   | 16.2               | 29.8 | 2.7               | 30.2        | 33.3         | ns   |
|  |              | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 3.0   | 10.8               | 17.5 | 2.7               | 18.6        | 20.5         | ns   |
|  |              | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 3.1   | 8.7                | 13.5 | 2.8               | 14.6        | 16.1         | ns   |
|  |              | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 2.7   | 6.8                | 10.5 | 2.4               | 11.2        | 12.4         | ns   |
|  |              | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 2.7   | 6.1                | 9.6  | 2.4               | 10.1        | 11.1         | ns   |

**Table 8. Dynamic characteristics ...continued**Voltages are referenced to GND (ground = 0 V); for test circuit see [Figure 8](#).

| Symbol   | Parameter   | Conditions                                      | 25 °C |                    |      | −40 °C to +125 °C |             |              | Unit |
|--|-------------|---|-------|--------------------|------|-------------------|-------------|--------------|------|
|  |             |   | Min   | Typ <sup>[1]</sup> | Max  | Min               | Max (85 °C) | Max (125 °C) |      |
| $t_{dis}$  | enable time | DIR to A; see <a href="#">Figure 7</a>          | [3]   |                    |      |                   |             |              |      |
|  |             | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 3.2   | 6.5                | 9.9  | 3.1               | 10.2        | 11.3         | ns   |
|  |             | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 3.5   | 6.5                | 10.0 | 3.2               | 10.2        | 11.3         | ns   |
|  |             | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 3.7   | 6.5                | 9.8  | 3.5               | 10.1        | 11.1         | ns   |
|  |             | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 3.2   | 6.5                | 10.1 | 3.1               | 10.2        | 11.3         | ns   |
|  |             | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 3.6   | 6.5                | 10.1 | 3.2               | 10.3        | 11.4         | ns   |
|  |             | DIR to B; see <a href="#">Figure 7</a>          | [3]   |                    |      |                   |             |              |      |
|  |             | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 6.4   | 14.3               | 23.5 | 5.8               | 24.8        | 27.4         | ns   |
|  |             | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 5.3   | 10.2               | 15.4 | 4.6               | 16.6        | 18.4         | ns   |
|  |             | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 5.2   | 9.2                | 13.6 | 4.7               | 14.7        | 16.2         | ns   |
| $C_L = 10 \text{ pF}; V_{CC(A)} = 1.4 \text{ V to } 1.6 \text{ V}$   | $t_{pd}$    | A to B or B to A; see <a href="#">Figure 6</a>  | [2]   |                    |      |                   |             |              |      |
|  |             | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 2.7   | 15.3               | 28.3 | 2.4               | 29.0        | 31.9         | ns   |
|  |             | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 2.7   | 10.0               | 15.8 | 2.5               | 17.0        | 18.7         | ns   |
|  |             | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 2.8   | 7.9                | 11.8 | 2.5               | 13.0        | 14.4         | ns   |
|  |             | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 2.4   | 6.0                | 8.6  | 2.2               | 9.4         | 10.4         | ns   |
|  |             | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 2.4   | 5.2                | 7.4  | 2.1               | 8.0         | 8.9          | ns   |
|  |             | DIR to A; see <a href="#">Figure 7</a>          | [3]   |                    |      |                   |             |              |      |
|  |             | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 2.5   | 4.7                | 6.4  | 2.3               | 6.8         | 7.6          | ns   |
|  |             | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 2.7   | 4.7                | 6.5  | 2.4               | 6.9         | 7.6          | ns   |
|  |             | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 2.9   | 4.7                | 6.5  | 2.6               | 6.9         | 7.6          | ns   |
| $C_L = 10 \text{ pF}; V_{CC(A)} = 1.65 \text{ V to } 1.95 \text{ V}$ | $t_{pd}$    | DIR to B; see <a href="#">Figure 7</a>          | [3]   |                    |      |                   |             |              |      |
|  |             | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 6.1   | 13.7               | 22.4 | 5.6               | 23.8        | 26.3         | ns   |
|  |             | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 5.0   | 9.6                | 14.2 | 4.3               | 15.5        | 17.1         | ns   |
|  |             | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 4.9   | 8.5                | 12.3 | 4.4               | 13.4        | 14.8         | ns   |
|  |             | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 3.3   | 6.4                | 8.7  | 3.0               | 9.6         | 10.6         | ns   |
|  |             | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 4.1   | 6.7                | 9.1  | 3.5               | 9.7         | 10.8         | ns   |
|  |             | DIR to A; see <a href="#">Figure 7</a>          | [3]   |                    |      |                   |             |              |      |
|  |             | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 2.6   | 15.0               | 27.8 | 2.3               | 28.3        | 31.2         | ns   |
|  |             | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 2.6   | 9.7                | 15.2 | 2.3               | 16.5        | 18.2         | ns   |
|  |             | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 2.7   | 7.5                | 11.2 | 2.3               | 12.4        | 13.7         | ns   |

**Table 8. Dynamic characteristics ...continued**Voltages are referenced to GND (ground = 0 V); for test circuit see [Figure 8](#).

| Symbol   | Parameter    | Conditions                                      | 25 °C |                    |      | −40 °C to +125 °C |             |              | Unit |
|--|--------------|---|-------|--------------------|------|-------------------|-------------|--------------|------|
|  |              |   | Min   | Typ <sup>[1]</sup> | Max  | Min               | Max (85 °C) | Max (125 °C) |      |
| $t_{dis}$  | disable time | DIR to A; see <a href="#">Figure 7</a>          | [3]   |                    |      |                   |             |              |      |
|  |              | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 2.5   | 4.6                | 6.2  | 2.4               | 6.6         | 7.3          | ns   |
|  |              | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 2.7   | 4.6                | 6.3  | 2.5               | 6.7         | 7.4          | ns   |
|  |              | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 2.9   | 4.6                | 6.3  | 2.7               | 6.7         | 7.4          | ns   |
|  |              | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 2.5   | 4.6                | 6.2  | 2.4               | 6.7         | 7.4          | ns   |
|  |              | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 2.8   | 4.6                | 6.3  | 2.5               | 6.7         | 7.4          | ns   |
|  |              | DIR to B; see <a href="#">Figure 7</a>          | [3]   |                    |      |                   |             |              |      |
|  |              | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 6.1   | 13.5               | 22.1 | 5.4               | 23.4        | 25.8         | ns   |
|  |              | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 5.0   | 9.3                | 13.6 | 4.2               | 14.9        | 16.5         | ns   |
|  |              | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 4.8   | 8.3                | 11.8 | 4.2               | 13.0        | 14.3         | ns   |
| $C_L = 10 \text{ pF}; V_{CC(A)} = 2.3 \text{ V to } 2.7 \text{ V}$ | $t_{pd}$     | A to B or B to A; see <a href="#">Figure 6</a>  | [2]   |                    |      |                   |             |              |      |
|  |              | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 2.5   | 14.4               | 27.2 | 2.3               | 27.8        | 30.6         | ns   |
|  |              | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 2.5   | 9.1                | 14.6 | 2.3               | 15.8        | 17.4         | ns   |
|  |              | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 2.6   | 7.0                | 10.5 | 2.2               | 11.7        | 12.9         | ns   |
|  |              | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 2.2   | 5.1                | 7.2  | 1.9               | 8.0         | 8.9          | ns   |
|  |              | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 2.2   | 4.3                | 5.9  | 1.9               | 6.6         | 7.3          | ns   |
|  |              | DIR to A; see <a href="#">Figure 7</a>          | [3]   |                    |      |                   |             |              |      |
|  |              | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 1.8   | 3.3                | 4.2  | 1.7               | 4.6         | 5.1          | ns   |
|  |              | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 2.0   | 3.3                | 4.4  | 1.8               | 4.7         | 5.2          | ns   |
|  |              | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 2.1   | 3.3                | 4.4  | 2.0               | 4.7         | 5.2          | ns   |
| $C_L = 10 \text{ pF}; V_{CC(A)} = 3.0 \text{ V to } 3.6 \text{ V}$ | $t_{pd}$     | DIR to B; see <a href="#">Figure 7</a>          | [3]   |                    |      |                   |             |              |      |
|  |              | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 6.1   | 13.4               | 21.8 | 5.4               | 23.2        | 25.6         | ns   |
|  |              | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 4.9   | 9.2                | 13.3 | 4.2               | 14.6        | 16.1         | ns   |
|  |              | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 4.8   | 8.1                | 11.4 | 4.2               | 12.5        | 13.8         | ns   |
|  |              | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 3.1   | 5.8                | 7.7  | 2.8               | 8.6         | 9.5          | ns   |
|  |              | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 3.9   | 6.2                | 8.0  | 3.3               | 8.7         | 9.6          | ns   |
|  |              | A to B or B to A; see <a href="#">Figure 6</a>  | [2]   |                    |      |                   |             |              |      |
|  |              | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 2.5   | 14.0               | 26.6 | 2.2               | 27.0        | 29.8         | ns   |
|  |              | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 2.5   | 8.7                | 14.0 | 2.3               | 15.1        | 16.7         | ns   |
|  |              | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 2.5   | 6.6                | 10.1 | 2.2               | 11.2        | 12.4         | ns   |

**Table 8. Dynamic characteristics ...continued**Voltages are referenced to GND (ground = 0 V); for test circuit see [Figure 8](#).

| Symbol   | Parameter    | Conditions                                      | 25 °C |                    |      | −40 °C to +125 °C |             |              | Unit |
|--|--------------|---|-------|--------------------|------|-------------------|-------------|--------------|------|
|  |              |   | Min   | Typ <sup>[1]</sup> | Max  | Min               | Max (85 °C) | Max (125 °C) |      |
| $t_{dis}$  | disable time | DIR to A; see <a href="#">Figure 7</a>          | [3]   |                    |      |                   |             |              |      |
|  |              | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 2.3   | 4.0                | 5.0  | 2.2               | 5.3         | 5.9          | ns   |
|  |              | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 2.5   | 4.0                | 5.2  | 2.3               | 5.4         | 6.0          | ns   |
|  |              | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 2.6   | 4.0                | 5.2  | 2.5               | 5.4         | 6.0          | ns   |
|  |              | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 2.3   | 4.0                | 5.1  | 2.2               | 5.4         | 6.0          | ns   |
|  |              | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 2.6   | 4.0                | 5.2  | 2.3               | 5.4         | 6.0          | ns   |
|  |              | DIR to B; see <a href="#">Figure 7</a>          | [3]   |                    |      |                   |             |              |      |
|  |              | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 6.2   | 13.5               | 22.0 | 5.5               | 23.4        | 25.8         | ns   |
|  |              | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 4.9   | 9.2                | 13.2 | 4.2               | 14.6        | 16.1         | ns   |
|  |              | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 4.8   | 8.1                | 11.3 | 4.3               | 12.4        | 13.7         | ns   |
| $C_L = 15 \text{ pF}; V_{CC(A)} = 1.1 \text{ V to } 1.3 \text{ V}$ | $t_{pd}$     | A to B or B to A; see <a href="#">Figure 6</a>  | [2]   |                    |      |                   |             |              |      |
|  |              | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 3.4   | 16.9               | 31.6 | 3.0               | 32.0        | 35.2         | ns   |
|  |              | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 3.7   | 11.3               | 18.2 | 3.1               | 19.5        | 21.5         | ns   |
|  |              | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 3.2   | 9.1                | 14.3 | 3.0               | 15.6        | 17.2         | ns   |
|  |              | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 3.2   | 7.3                | 11.2 | 2.8               | 12.0        | 13.2         | ns   |
|  |              | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 3.1   | 6.5                | 10.2 | 2.6               | 10.7        | 11.8         | ns   |
|  |              | DIR to A; see <a href="#">Figure 7</a>          | [3]   |                    |      |                   |             |              |      |
|  |              | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 3.9   | 7.6                | 11.4 | 3.8               | 11.7        | 12.9         | ns   |
|  |              | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 4.5   | 7.6                | 11.3 | 4.1               | 11.7        | 12.9         | ns   |
|  |              | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 4.2   | 7.6                | 11.3 | 4.1               | 11.7        | 12.9         | ns   |
| $C_L = 15 \text{ pF}; V_{CC(A)} = 1.4 \text{ V to } 1.6 \text{ V}$ | $t_{pd}$     | DIR to B; see <a href="#">Figure 7</a>          | [3]   |                    |      |                   |             |              |      |
|  |              | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 7.2   | 15.4               | 24.9 | 6.5               | 26.3        | 29.0         | ns   |
|  |              | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 6.3   | 11.1               | 16.3 | 5.4               | 17.7        | 19.5         | ns   |
|  |              | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 5.7   | 10.4               | 15.0 | 5.2               | 16.2        | 17.9         | ns   |
|  |              | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 4.1   | 7.9                | 11.4 | 3.8               | 12.1        | 13.4         | ns   |
|  |              | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 5.3   | 8.8                | 12.2 | 4.9               | 12.7        | 14.1         | ns   |
|  |              | DIR to A; see <a href="#">Figure 7</a>          | [3]   |                    |      |                   |             |              |      |
|  |              | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 3.1   | 16.1               | 30.1 | 2.8               | 30.7        | 33.8         | ns   |
|  |              | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 3.4   | 10.5               | 16.5 | 2.8               | 17.9        | 19.7         | ns   |
|  |              | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 3.0   | 8.4                | 12.6 | 2.7               | 13.9        | 15.4         | ns   |

**Table 8. Dynamic characteristics ...continued**Voltages are referenced to GND (ground = 0 V); for test circuit see [Figure 8](#).

| Symbol   | Parameter    | Conditions                                      | 25 °C |                    |      | −40 °C to +125 °C |             |              | Unit |
|--|--------------|---|-------|--------------------|------|-------------------|-------------|--------------|------|
|  |              |   | Min   | Typ <sup>[1]</sup> | Max  | Min               | Max (85 °C) | Max (125 °C) |      |
| $t_{dis}$  | disable time | DIR to A; see <a href="#">Figure 7</a>          | [3]   |                    |      |                   |             |              |      |
|  |              | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 3.1   | 5.6                | 7.6  | 2.9               | 8.0         | 8.9          | ns   |
|  |              | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 3.5   | 5.6                | 7.5  | 3.1               | 8.0         | 8.8          | ns   |
|  |              | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 3.3   | 5.6                | 7.6  | 3.1               | 8.0         | 8.9          | ns   |
|  |              | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 3.1   | 5.6                | 7.7  | 2.9               | 8.1         | 9.0          | ns   |
|  |              | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 3.5   | 5.6                | 7.8  | 3.1               | 8.1         | 9.0          | ns   |
|  |              | DIR to B; see <a href="#">Figure 7</a>          | [3]   |                    |      |                   |             |              |      |
|  |              | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 6.9   | 14.9               | 23.8 | 6.4               | 25.3        | 27.9         | ns   |
|  |              | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 6.0   | 10.5               | 15.1 | 5.2               | 16.6        | 18.3         | ns   |
|  |              | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 5.4   | 9.7                | 13.7 | 5.0               | 15.0        | 16.5         | ns   |
| $C_L = 15 \text{ pF}; V_{CC(A)} = 1.65 \text{ V to } 1.95 \text{ V}$ | $t_{pd}$     | A to B or B to A; see <a href="#">Figure 6</a>  | [2]   |                    |      |                   |             |              |      |
|  |              | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 3.0   | 15.8               | 29.6 | 2.6               | 30.1        | 33.2         | ns   |
|  |              | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 3.2   | 10.2               | 15.9 | 2.6               | 17.4        | 19.2         | ns   |
|  |              | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 2.8   | 8.0                | 12.0 | 2.5               | 13.4        | 14.8         | ns   |
|  |              | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 2.8   | 6.0                | 8.6  | 2.3               | 9.5         | 10.5         | ns   |
|  |              | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 2.6   | 5.2                | 7.3  | 2.2               | 8.0         | 8.9          | ns   |
|  |              | DIR to A; see <a href="#">Figure 7</a>          | [3]   |                    |      |                   |             |              |      |
|  |              | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 3.2   | 5.8                | 7.6  | 3.1               | 8.0         | 8.9          | ns   |
|  |              | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 3.7   | 5.8                | 7.6  | 3.3               | 8.1         | 8.9          | ns   |
|  |              | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 3.5   | 5.8                | 7.7  | 3.3               | 8.1         | 9.0          | ns   |
| $C_L = 15 \text{ pF}; V_{CC(A)} = 2.3 \text{ V to } 2.7 \text{ V}$   | $t_{pd}$     | DIR to B; see <a href="#">Figure 7</a>          | [3]   |                    |      |                   |             |              |      |
|  |              | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 6.9   | 14.7               | 23.4 | 6.2               | 24.9        | 27.4         | ns   |
|  |              | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 5.9   | 10.2               | 14.6 | 5.0               | 16.0        | 17.7         | ns   |
|  |              | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 5.3   | 9.4                | 13.2 | 4.8               | 14.5        | 16.0         | ns   |
|  |              | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 3.7   | 6.8                | 9.4  | 3.4               | 10.2        | 11.3         | ns   |
|  |              | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 4.9   | 7.6                | 9.9  | 4.4               | 10.6        | 11.7         | ns   |
|  |              | DIR to A; see <a href="#">Figure 7</a>          | [3]   |                    |      |                   |             |              |      |
|  |              | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 3.0   | 15.2               | 29.0 | 2.6               | 29.5        | 32.5         | ns   |
|  |              | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 3.1   | 9.6                | 15.3 | 2.6               | 16.7        | 18.4         | ns   |
|  |              | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 2.7   | 7.5                | 11.3 | 2.5               | 12.6        | 13.9         | ns   |

**Table 8. Dynamic characteristics ...continued**Voltages are referenced to GND (ground = 0 V); for test circuit see [Figure 8](#).

| Symbol   | Parameter   | Conditions                                      | 25 °C |                    |      | −40 °C to +125 °C |             |              | Unit |
|--|-------------|---|-------|--------------------|------|-------------------|-------------|--------------|------|
|  |             |   | Min   | Typ <sup>[1]</sup> | Max  | Min               | Max (85 °C) | Max (125 °C) |      |
| $t_{dis}$  | enable time | DIR to A; see <a href="#">Figure 7</a>          | [3]   |                    |      |                   |             |              |      |
|  |             | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 2.4   | 4.1                | 5.2  | 2.2               | 5.6         | 6.2          | ns   |
|  |             | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 2.7   | 4.1                | 5.3  | 2.4               | 5.7         | 6.3          | ns   |
|  |             | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 2.5   | 4.1                | 5.4  | 2.4               | 5.7         | 6.3          | ns   |
|  |             | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 2.4   | 4.1                | 5.4  | 2.2               | 5.7         | 6.3          | ns   |
|  |             | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 2.7   | 4.1                | 5.3  | 2.4               | 5.6         | 6.2          | ns   |
|  |             | DIR to B; see <a href="#">Figure 7</a>          | [3]   |                    |      |                   |             |              |      |
|  |             | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 6.9   | 14.6               | 23.2 | 6.2               | 24.7        | 27.2         | ns   |
|  |             | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 5.9   | 10.1               | 14.2 | 5.0               | 15.6        | 17.3         | ns   |
|  |             | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 5.3   | 9.2                | 12.8 | 4.8               | 14.0        | 15.5         | ns   |
| $C_L = 15 \text{ pF}; V_{CC(A)} = 3.0 \text{ V to } 3.6 \text{ V}$ | $t_{pd}$    | A to B or B to A; see <a href="#">Figure 6</a>  | [2]   |                    |      |                   |             |              |      |
|  |             | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 2.9   | 14.7               | 28.3 | 2.6               | 28.8        | 31.7         | ns   |
|  |             | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 3.1   | 9.2                | 14.7 | 2.6               | 16.0        | 17.7         | ns   |
|  |             | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 2.7   | 7.1                | 10.9 | 2.4               | 12.1        | 13.4         | ns   |
|  |             | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 2.7   | 5.2                | 7.4  | 2.2               | 8.2         | 9.1          | ns   |
|  |             | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 2.5   | 4.5                | 6.1  | 2.1               | 6.8         | 7.5          | ns   |
|  |             | DIR to A; see <a href="#">Figure 7</a>          | [3]   |                    |      |                   |             |              |      |
|  |             | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 3.1   | 5.3                | 6.5  | 3.0               | 6.9         | 7.6          | ns   |
|  |             | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 3.5   | 5.3                | 6.6  | 3.2               | 7.0         | 7.7          | ns   |
|  |             | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 3.3   | 5.3                | 6.7  | 3.2               | 7.0         | 7.8          | ns   |
| $C_L = 30 \text{ pF}; V_{CC(A)} = 1.1 \text{ V to } 1.3 \text{ V}$ | $t_{pd}$    | DIR to B; see <a href="#">Figure 7</a>          | [3]   |                    |      |                   |             |              |      |
|  |             | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 6.9   | 14.6               | 23.4 | 6.3               | 24.9        | 27.4         | ns   |
|  |             | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 5.9   | 10.1               | 14.2 | 5.0               | 15.6        | 17.2         | ns   |
|  |             | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 5.3   | 9.2                | 12.7 | 4.8               | 13.9        | 15.4         | ns   |
|  |             | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 3.7   | 6.6                | 8.8  | 3.4               | 9.6         | 10.6         | ns   |
|  |             | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 4.8   | 7.4                | 9.3  | 4.4               | 10.0        | 11.0         | ns   |
|  |             | DIR to A; see <a href="#">Figure 7</a>          | [3]   |                    |      |                   |             |              |      |
|  |             | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 4.2   | 19.1               | 36.0 | 3.8               | 36.8        | 40.5         | ns   |
|  |             | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 4.5   | 12.8               | 20.6 | 4.0               | 22.0        | 24.2         | ns   |
|  |             | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 4.2   | 10.4               | 16.2 | 3.8               | 17.4        | 19.2         | ns   |
|  |             | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 4.0   | 8.3                | 12.4 | 3.5               | 13.2        | 14.5         | ns   |
|  |             | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 4.0   | 7.5                | 11.5 | 3.7               | 12.5        | 13.8         | ns   |

**Table 8. Dynamic characteristics ...continued**Voltages are referenced to GND (ground = 0 V); for test circuit see [Figure 8](#).

| Symbol   | Parameter   | Conditions                                      | 25 °C |                    |      | −40 °C to +125 °C |             |              | Unit |
|--|-------------|---|-------|--------------------|------|-------------------|-------------|--------------|------|
|  |             |   | Min   | Typ <sup>[1]</sup> | Max  | Min               | Max (85 °C) | Max (125 °C) |      |
| $t_{dis}$  | enable time | DIR to A; see <a href="#">Figure 7</a>          | [3]   |                    |      |                   |             |              |      |
|  |             | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 5.6   | 11.0               | 15.7 | 5.5               | 16.2        | 17.9         | ns   |
|  |             | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 6.1   | 11.0               | 15.6 | 6.0               | 15.9        | 17.5         | ns   |
|  |             | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 6.6   | 11.0               | 15.5 | 6.5               | 15.8        | 17.4         | ns   |
|  |             | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 5.6   | 11.0               | 15.6 | 5.5               | 15.8        | 17.5         | ns   |
|  |             | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 7.0   | 11.0               | 15.9 | 6.6               | 16.7        | 18.4         | ns   |
|  |             | DIR to B; see <a href="#">Figure 7</a>          | [3]   |                    |      |                   |             |              |      |
|  |             | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 8.7   | 18.9               | 29.0 | 8.1               | 30.5        | 33.6         | ns   |
|  |             | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 7.3   | 13.8               | 19.3 | 6.8               | 20.7        | 22.8         | ns   |
|  |             | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 8.1   | 13.7               | 19.2 | 7.7               | 20.3        | 22.4         | ns   |
| $C_L = 30 \text{ pF}; V_{CC(A)} = 1.4 \text{ V to } 1.6 \text{ V}$   | $t_{pd}$    | A to B or B to A; see <a href="#">Figure 6</a>  | [2]   |                    |      |                   |             |              |      |
|  |             | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 4.0   | 18.2               | 34.5 | 3.5               | 35.5        | 39.1         | ns   |
|  |             | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 4.2   | 12.0               | 18.9 | 3.7               | 20.3        | 22.4         | ns   |
|  |             | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 3.9   | 9.6                | 14.4 | 3.5               | 15.8        | 17.4         | ns   |
|  |             | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 3.8   | 7.5                | 10.4 | 3.2               | 11.4        | 12.6         | ns   |
|  |             | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 3.7   | 6.7                | 9.3  | 3.4               | 10.4        | 11.4         | ns   |
|  |             | DIR to A; see <a href="#">Figure 7</a>          | [3]   |                    |      |                   |             |              |      |
|  |             | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 4.4   | 8.3                | 10.8 | 4.3               | 11.4        | 12.6         | ns   |
|  |             | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 4.8   | 8.3                | 10.7 | 4.6               | 11.2        | 12.3         | ns   |
|  |             | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 5.2   | 8.3                | 10.8 | 5.0               | 11.2        | 12.4         | ns   |
| $C_L = 30 \text{ pF}; V_{CC(A)} = 1.65 \text{ V to } 1.95 \text{ V}$ | $t_{pd}$    | DIR to B; see <a href="#">Figure 7</a>          | [3]   |                    |      |                   |             |              |      |
|  |             | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 8.4   | 18.3               | 27.9 | 7.9               | 29.5        | 32.5         | ns   |
|  |             | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 7.1   | 13.2               | 18.2 | 6.6               | 19.6        | 21.6         | ns   |
|  |             | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 7.8   | 13.1               | 17.9 | 7.4               | 19.1        | 21.0         | ns   |
|  |             | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 4.9   | 9.6                | 12.6 | 4.6               | 13.4        | 14.8         | ns   |
|  |             | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 7.7   | 11.7               | 14.8 | 7.2               | 16.3        | 18.0         | ns   |
|  |             | DIR to A; see <a href="#">Figure 7</a>          | [3]   |                    |      |                   |             |              |      |
|  |             | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 3.9   | 18.0               | 34.0 | 3.4               | 34.9        | 38.4         | ns   |
|  |             | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 4.1   | 11.7               | 18.3 | 3.5               | 19.8        | 21.9         | ns   |
|  |             | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 3.8   | 9.2                | 13.9 | 3.4               | 15.2        | 16.8         | ns   |
|  |             | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 3.6   | 7.1                | 9.8  | 3.1               | 10.8        | 11.9         | ns   |
|  |             | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 3.5   | 6.3                | 8.6  | 3.2               | 9.7         | 10.7         | ns   |

**Table 8. Dynamic characteristics ...continued**Voltages are referenced to GND (ground = 0 V); for test circuit see [Figure 8](#).

| Symbol   | Parameter    | Conditions                                      | 25 °C |                    |      | −40 °C to +125 °C |             |              | Unit |
|--|--------------|---|-------|--------------------|------|-------------------|-------------|--------------|------|
|  |              |   | Min   | Typ <sup>[1]</sup> | Max  | Min               | Max (85 °C) | Max (125 °C) |      |
| $t_{dis}$  | disable time | DIR to A; see <a href="#">Figure 7</a>          | [3]   |                    |      |                   |             |              |      |
|  |              | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 5.0   | 9.2                | 11.7 | 4.8               | 12.3        | 13.6         | ns   |
|  |              | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 5.4   | 9.2                | 11.7 | 5.3               | 12.1        | 13.4         | ns   |
|  |              | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 5.8   | 9.1                | 11.9 | 5.7               | 12.3        | 13.6         | ns   |
|  |              | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 5.0   | 9.1                | 11.7 | 4.8               | 12.1        | 13.4         | ns   |
|  |              | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 6.2   | 9.2                | 11.9 | 5.8               | 12.7        | 14.1         | ns   |
|  |              | DIR to B; see <a href="#">Figure 7</a>          | [3]   |                    |      |                   |             |              |      |
|  |              | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 8.4   | 18.1               | 27.6 | 7.8               | 29.1        | 32.0         | ns   |
|  |              | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 7.0   | 12.9               | 17.7 | 6.4               | 19.1        | 21.0         | ns   |
|  |              | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 7.7   | 12.8               | 17.4 | 7.2               | 18.6        | 20.6         | ns   |
| $C_L = 30 \text{ pF}; V_{CC(A)} = 2.3 \text{ V to } 2.7 \text{ V}$ | $t_{pd}$     | A to B or B to A; see <a href="#">Figure 6</a>  | [2]   |                    |      |                   |             |              |      |
|  |              | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 3.8   | 17.4               | 33.4 | 3.4               | 34.3        | 37.8         | ns   |
|  |              | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 4.0   | 11.1               | 17.7 | 3.5               | 19.1        | 21.1         | ns   |
|  |              | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 3.7   | 8.7                | 13.2 | 3.3               | 14.4        | 15.9         | ns   |
|  |              | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 3.4   | 6.5                | 9.1  | 3.0               | 10.0        | 11.1         | ns   |
|  |              | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 3.5   | 5.7                | 7.8  | 3.1               | 8.9         | 9.8          | ns   |
|  |              | DIR to A; see <a href="#">Figure 7</a>          | [3]   |                    |      |                   |             |              |      |
|  |              | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 3.6   | 6.5                | 8.1  | 3.5               | 8.5         | 9.4          | ns   |
|  |              | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 3.9   | 6.5                | 8.1  | 3.8               | 8.5         | 9.4          | ns   |
|  |              | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 4.2   | 6.5                | 8.3  | 4.1               | 8.6         | 9.5          | ns   |
| $C_L = 30 \text{ pF}; V_{CC(A)} = 3.0 \text{ V to } 3.6 \text{ V}$ | $t_{pd}$     | DIR to B; see <a href="#">Figure 7</a>          | [3]   |                    |      |                   |             |              |      |
|  |              | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 8.4   | 18.0               | 27.4 | 7.8               | 28.8        | 31.8         | ns   |
|  |              | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 7.0   | 12.8               | 17.3 | 6.4               | 18.7        | 20.6         | ns   |
|  |              | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 7.7   | 12.6               | 17.0 | 7.2               | 18.2        | 20.0         | ns   |
|  |              | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 4.8   | 9.1                | 11.6 | 4.5               | 12.4        | 13.7         | ns   |
|  |              | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 7.6   | 11.1               | 13.7 | 7.0               | 15.3        | 16.9         | ns   |
|  |              | DIR to A; see <a href="#">Figure 7</a>          | [3]   |                    |      |                   |             |              |      |
|  |              | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 3.8   | 16.9               | 32.8 | 3.3               | 33.5        | 36.9         | ns   |
|  |              | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 3.9   | 10.7               | 17.1 | 3.5               | 18.5        | 20.4         | ns   |
|  |              | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 3.7   | 8.3                | 12.7 | 3.3               | 13.9        | 15.4         | ns   |
|  |              | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 3.2   | 6.3                | 8.6  | 2.9               | 9.5         | 10.5         | ns   |
|  |              | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 3.4   | 5.5                | 7.4  | 3.1               | 8.4         | 9.3          | ns   |

**Table 8. Dynamic characteristics ...continued**Voltages are referenced to GND (ground = 0 V); for test circuit see [Figure 8](#).

| Symbol    | Parameter   | Conditions                                      | 25 °C |                    |      | −40 °C to +125 °C |                |                 | Unit |
|-----------|-------------|---|-------|--------------------|------|-------------------|----------------|-----------------|------|
|           |             |   | Min   | Typ <sup>[1]</sup> | Max  | Min               | Max<br>(85 °C) | Max<br>(125 °C) |      |
| $t_{dis}$ | enable time | DIR to A; see <a href="#">Figure 7</a>          | [3]   |                    |      |                   |                |                 |      |
|           |             | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 5.0   | 9.0                | 11.0 | 4.9               | 11.5           | 12.7            | ns   |
|           |             | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 5.4   | 9.0                | 11.1 | 5.3               | 11.4           | 12.6            | ns   |
|           |             | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 5.9   | 9.0                | 11.3 | 5.7               | 11.6           | 12.8            | ns   |
|           |             | $V_{CC(B)} = 2.3 \text{ V to } 2.7 \text{ V}$   | 5.0   | 9.0                | 11.2 | 4.9               | 11.4           | 12.6            | ns   |
|           |             | $V_{CC(B)} = 3.0 \text{ V to } 3.6 \text{ V}$   | 6.2   | 9.0                | 11.2 | 5.9               | 11.9           | 13.2            | ns   |
|           |             | DIR to B; see <a href="#">Figure 7</a>          | [3]   |                    |      |                   |                |                 |      |
|           |             | $V_{CC(B)} = 1.1 \text{ V to } 1.3 \text{ V}$   | 8.4   | 18.1               | 27.6 | 7.8               | 29.1           | 32.0            | ns   |
|           |             | $V_{CC(B)} = 1.4 \text{ V to } 1.6 \text{ V}$   | 7.0   | 12.8               | 17.3 | 6.4               | 18.6           | 20.6            | ns   |
|           |             | $V_{CC(B)} = 1.65 \text{ V to } 1.95 \text{ V}$ | 7.7   | 12.6               | 17.0 | 7.2               | 18.1           | 19.9            | ns   |

**Table 8. Dynamic characteristics ...continued**Voltages are referenced to GND (ground = 0 V); for test circuit see [Figure 8](#).

| Symbol  | Parameter                     | Conditions                                      | 25 °C  |                    |     | −40 °C to +125 °C |                |                 | Unit |
|---|-------------------------------|---|--------|--------------------|-----|-------------------|----------------|-----------------|------|
|   |                               |   | Min    | Typ <sup>[1]</sup> | Max | Min               | Max<br>(85 °C) | Max<br>(125 °C) |      |
| <b>C<sub>L</sub> = 5 pF, 10 pF, 15 pF and 30 pF</b> |                               |   |        |                    |     |                   |                |                 |      |
| C <sub>PD</sub>                                     | power dissipation capacitance | A port; (direction A to B)                      | [4][5] |                    |     |                   |                |                 |      |
|   |                               | V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.2 V | -      | 0.6                | -   | -                 | -              | -               | pF   |
|   |                               | V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.5 V | -      | 0.7                | -   | -                 | -              | -               | pF   |
|   |                               | V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.8 V | -      | 0.7                | -   | -                 | -              | -               | pF   |
|   |                               | V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 2.5 V | -      | 0.9                | -   | -                 | -              | -               | pF   |
|   |                               | V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 3.3 V | -      | 1.1                | -   | -                 | -              | -               | pF   |
|   |                               | A port; (direction B to A)                      | [4][5] |                    |     |                   |                |                 |      |
|   |                               | V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.2 V | -      | 3.7                | -   | -                 | -              | -               | pF   |
|   |                               | V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.5 V | -      | 3.8                | -   | -                 | -              | -               | pF   |
|   |                               | V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.8 V | -      | 4.0                | -   | -                 | -              | -               | pF   |
|   |                               | V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 2.5 V | -      | 4.6                | -   | -                 | -              | -               | pF   |
|   |                               | V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 3.3 V | -      | 5.2                | -   | -                 | -              | -               | pF   |
|   |                               | B port; (direction A to B)                      | [4][5] |                    |     |                   |                |                 |      |
|   |                               | V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.2 V | -      | 3.7                | -   | -                 | -              | -               | pF   |
|   |                               | V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.5 V | -      | 3.8                | -   | -                 | -              | -               | pF   |
|   |                               | V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.8 V | -      | 4.0                | -   | -                 | -              | -               | pF   |
|   |                               | V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 2.5 V | -      | 4.6                | -   | -                 | -              | -               | pF   |
|   |                               | V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 3.3 V | -      | 5.2                | -   | -                 | -              | -               | pF   |
|   |                               | B port; (direction B to A)                      | [4][5] |                    |     |                   |                |                 |      |
|   |                               | V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.2 V | -      | 0.6                | -   | -                 | -              | -               | pF   |
|   |                               | V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.5 V | -      | 0.7                | -   | -                 | -              | -               | pF   |
|   |                               | V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 1.8 V | -      | 0.7                | -   | -                 | -              | -               | pF   |
|   |                               | V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 2.5 V | -      | 0.9                | -   | -                 | -              | -               | pF   |
|   |                               | V <sub>CC(A)</sub> = V <sub>CC(B)</sub> = 3.3 V | -      | 1.1                | -   | -                 | -              | -               | pF   |

[1] All typical values are measured at nominal V<sub>CC(A)</sub> and V<sub>CC(B)</sub>.[2] t<sub>pd</sub> is the same as t<sub>PLH</sub> and t<sub>PHL</sub>.[3] t<sub>dis</sub> is the same as t<sub>PLZ</sub> and t<sub>PHZ</sub>.[4] C<sub>PD</sub> is used to determine the dynamic power dissipation (P<sub>D</sub> in  $\mu$ W).

$$P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \sum(C_L \times V_{CC}^2 \times f_o) \text{ where:}$$


f<sub>i</sub> = input frequency in MHz;f<sub>o</sub> = output frequency in MHz;C<sub>L</sub> = load capacitance in pF;V<sub>CC</sub> = supply voltage in V;

N = number of inputs switching;

$$\Sigma(C_L \times V_{CC}^2 \times f_o) = \text{sum of the outputs.}$$

[5] f<sub>i</sub> = 1 MHz; V<sub>I</sub> = GND to V<sub>CC</sub>


## 12. Waveforms

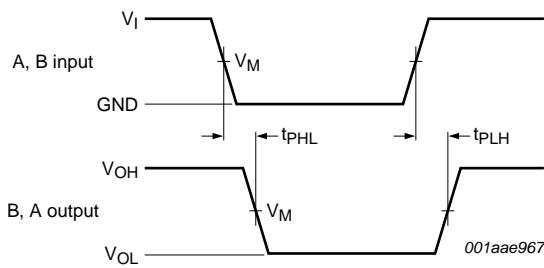

Measurement points are given in [Table 9](#).

$V_{OL}$  and  $V_{OH}$  are typical output voltage drops that occur with the output load.

**Fig 6. The data input (A, B) to output (B, A) propagation delay times**

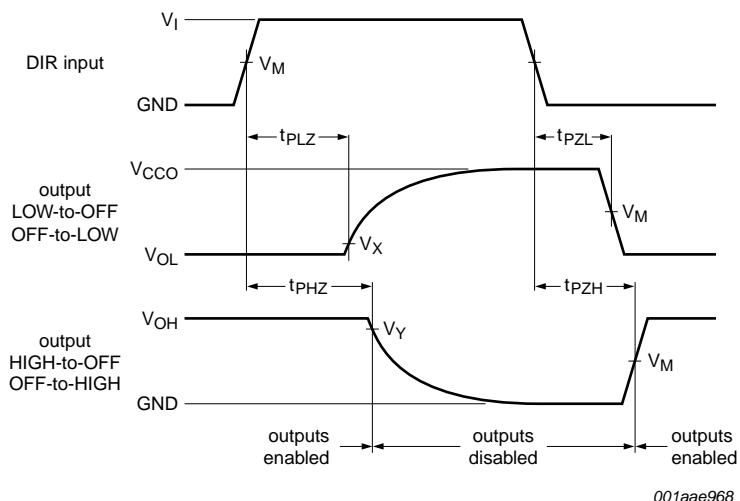

Measurement points are given in [Table 9](#).

$V_{OL}$  and  $V_{OH}$  are typical output voltage drops that occur with the output load.


**Fig 7. Enable and disable times**

**Table 9. Measurement points**

| Supply voltage         | Input <sup>[1]</sup> | Output <sup>[2]</sup>     |
|------------------------|----------------------|---------------------------|
| $V_{CC(A)}, V_{CC(B)}$ | $V_M$                | $V_M$                     |
| 1.1 V to 1.6 V         | $0.5 \times V_{CCI}$ | $0.5 \times V_{CCO}$      |
| 1.65 V to 2.7 V        | $0.5 \times V_{CCI}$ | $0.5 \times V_{CCO}$      |
| 3.0 V to 3.6 V         | $0.5 \times V_{CCI}$ | $0.5 \times V_{CCO}$      |
|                        |                      |                           |
|                        |                      | $V_X$                     |
|                        |                      | $V_{OL} + 0.1 \text{ V}$  |
|                        |                      | $V_{OH} - 0.1 \text{ V}$  |
|                        |                      | $V_{OL} + 0.15 \text{ V}$ |
|                        |                      | $V_{OH} - 0.15 \text{ V}$ |
|                        |                      | $V_{OL} + 0.3 \text{ V}$  |
|                        |                      | $V_{OH} - 0.3 \text{ V}$  |

[1]  $V_{CCI}$  is the supply voltage associated with the data input port.

[2]  $V_{CCO}$  is the supply voltage associated with the output port.

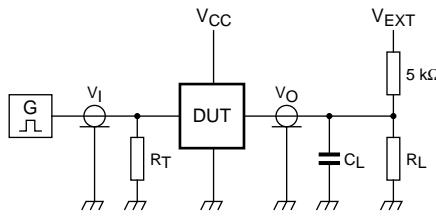

Test data is given in [Table 10](#).

$R_L$  = Load resistance.

$C_L$  = Load capacitance including jig and probe capacitance.

$R_T$  = Termination resistance.

$V_{EXT}$  = External voltage for measuring switching times.

**Fig 8. Test circuit for measuring switching times**

**Table 10. Test data**

| Supply voltage         | Input       |                       | Load                            |              | $V_{EXT}$          |                    |                          |  |
|------------------------|-------------|-----------------------|---------------------------------|--------------|--------------------|--------------------|--------------------------|--|
| $V_{CC(A)}, V_{CC(B)}$ | $V_I^{[1]}$ | $t_r = t_f$           | $C_L$                           | $R_L^{[2]}$  | $t_{PLH}, t_{PHL}$ | $t_{PZH}, t_{PHZ}$ | $t_{PZL}, t_{PLZ}^{[3]}$ |  |
| 1.1 V to 3.6 V         | $V_{CCI}$   | $\leq 3.0 \text{ ns}$ | 5 pF, 10 pF, 15 pF<br>and 30 pF | 5 kΩ or 1 MΩ | open               | GND                | $2 \times V_{CCO}$       |  |

[1]  $V_{CCI}$  is the supply voltage associated with the data input port.


[2] For measuring enable and disable times  $R_L = 5 \text{ k}\Omega$ , for measuring propagation delays, setup and hold times and pulse width  $R_L = 1 \text{ M}\Omega$ .

[3]  $V_{CCO}$  is the supply voltage associated with the output port.

## 13. Application information

### 13.1 Unidirectional logic level-shifting application

The circuit given in [Figure 9](#) is an example of the 74AUP1T45 being used in an unidirectional logic level-shifting application.

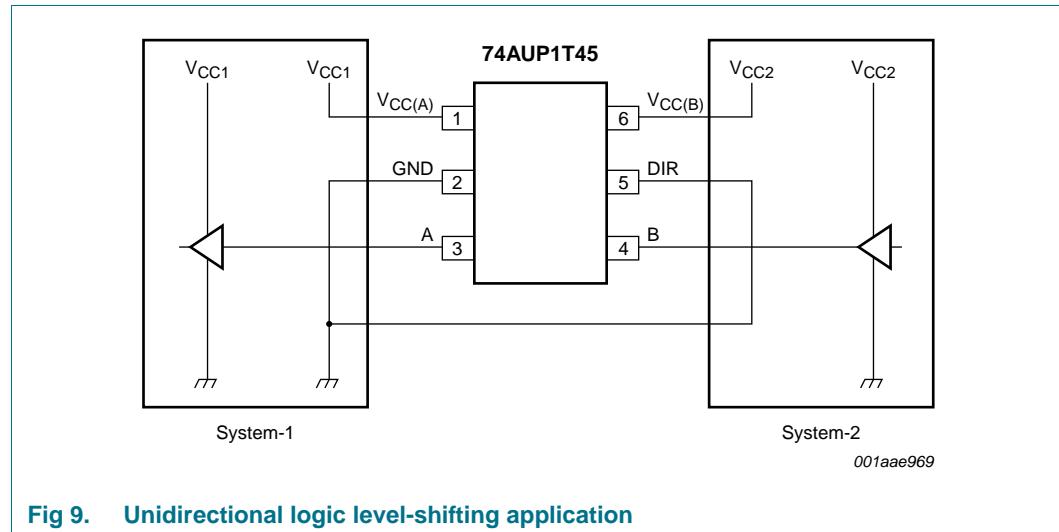


**Table 11. Description unidirectional logic level-shifting application**

| Pin | Name        | Function  | Description   |
|-----|-------------|-----------|---|
| 1   | $V_{CC(A)}$ | $V_{CC1}$ | supply voltage of system-1 (1.1 V to 3.6 V)               |
| 2   | GND         | GND       | device ground (0 V)                                       |
| 3   | A           | OUT       | output level depends on $V_{CC1}$ voltage                 |
| 4   | B           | IN        | input threshold value depends on $V_{CC2}$ voltage        |
| 5   | DIR         | DIR       | the GND (LOW level) determines B port to A port direction |
| 6   | $V_{CC(B)}$ | $V_{CC2}$ | supply voltage of system-2 (1.1 V to 3.6 V)               |

### 13.2 Bidirectional logic level-shifting application

[Figure 10](#) shows the 74AUP1T45 being used in a bidirectional logic level-shifting application. Since the device does not have an output enable (OE) pin, the system designer should take precautions to avoid bus contention between system-1 and system-2 when changing directions.

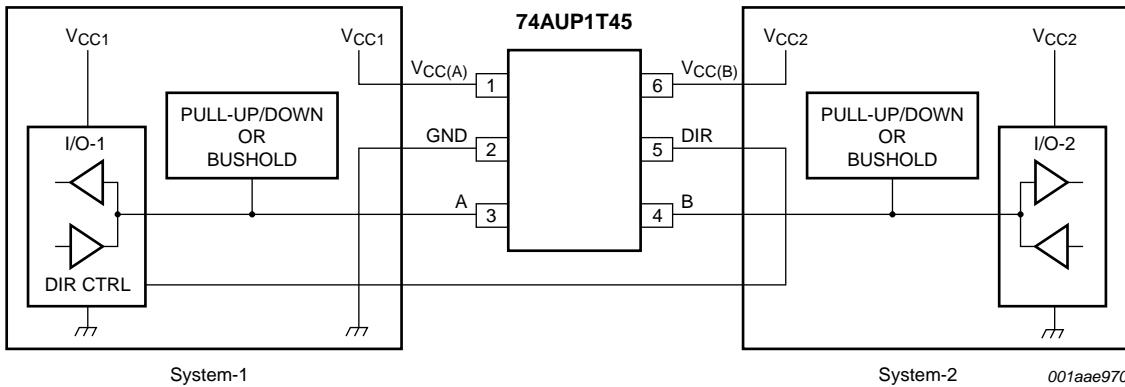

System-1 and system-2 must use the same conditions, i.e., both pull-up or both pull-down.

**Fig 10. Bidirectional logic level-shifting application**

[Table 12](#) gives a sequence that will illustrate data transmission from system-1 to system-2 and then from system-2 to system-1.

**Table 12. Description bidirectional logic level-shifting application<sup>[1][2]</sup>**

| State | DIR CTRL | I/O-1  | I/O-2  | Description   |
|-------|----------|--------|--------|---|
| 1     | H        | output | input  | system-1 data to system-2   |
| 2     | H        | Z      | Z      | system-2 is getting ready to send data to system-1. I/O-1 and I/O-2 are disabled. The bus-line state depends on the pull-up or pull-down. |
| 3     | L        | Z      | Z      | DIR bit is flipped. I/O-1 and I/O-2 still are disabled. The bus-line state depends on the pull-up or pull-down.                           |
| 4     | L        | input  | output | system-2 data to system-1   |

[1] System-1 and system-2 must use the same conditions, i.e., both pull-up or both pull-down.

[2] H = HIGH voltage level;  
L = LOW voltage level;  
Z = high-impedance OFF-state.

### 13.3 Power-up considerations

A proper power-up sequence always should be followed to avoid excessive supply current, bus contention, oscillations, or other anomalies. Take the following precautions to guard against such power-up problems:

- Connect ground before any supply voltage is applied.
- Power-up  $V_{CC(A)}$ .
- $V_{CC(B)}$  can be ramped up along with or after  $V_{CC(A)}$ .

### 13.4 Enable times

Calculate the enable times for the 74AUP1T45 using the following formulas:


- $t_{PZH}$  (DIR to A) =  $t_{PLZ}$  (DIR to B) +  $t_{PLH}$  (B to A)
- $t_{PZL}$  (DIR to A) =  $t_{PHZ}$  (DIR to B) +  $t_{PHL}$  (B to A)
- $t_{PZH}$  (DIR to B) =  $t_{PLZ}$  (DIR to A) +  $t_{PLH}$  (A to B)
- $t_{PZL}$  (DIR to B) =  $t_{PHZ}$  (DIR to A) +  $t_{PHL}$  (A to B)

In a bidirectional application, these enable times provide the maximum delay from the time the DIR bit is switched until an output is expected. For example, if the 74AUP1T45 initially is transmitting from A to B, then the DIR bit is switched, the B port of the device must be disabled before presenting it with an input. After the B port has been disabled, an input signal applied to it appears on the corresponding A port after the specified propagation delay.

## 14. Package outline

Plastic surface-mounted package; 6 leads

SOT363

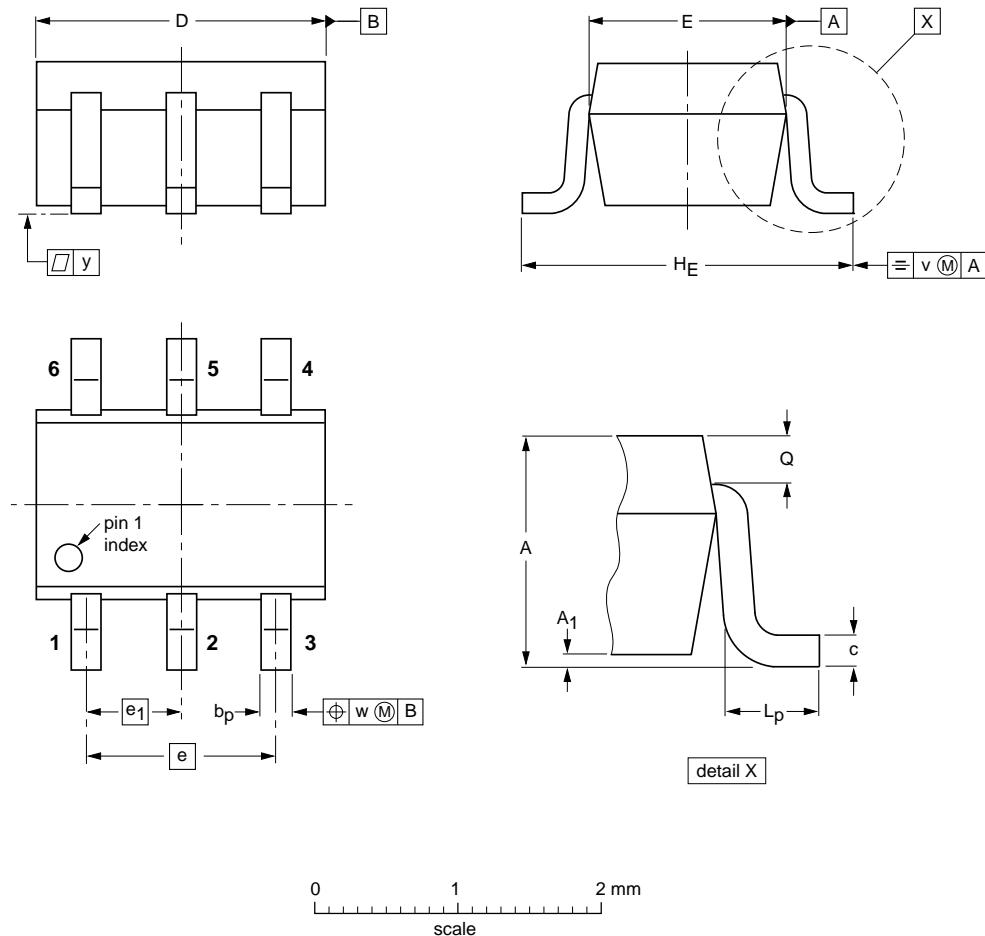

DIMENSIONS (mm are the original dimensions)

| UNIT | A          | $A_1$<br>max | $b_p$        | c            | D          | E            | e   | $e_1$ | $H_E$      | $L_p$        | Q            | v   | w   | y   |
|------|------------|--------------|--------------|--------------|------------|--------------|-----|-------|------------|--------------|--------------|-----|-----|-----|
| mm   | 1.1<br>0.8 | 0.1          | 0.30<br>0.20 | 0.25<br>0.10 | 2.2<br>1.8 | 1.35<br>1.15 | 1.3 | 0.65  | 2.2<br>2.0 | 0.45<br>0.15 | 0.25<br>0.15 | 0.2 | 0.2 | 0.1 |

| OUTLINE VERSION | REFERENCES |       |       |  | EUROPEAN PROJECTION | ISSUE DATE             |
|-----------------|------------|-------|-------|--|---------------------|------------------------|
|                 | IEC        | JEDEC | JEITA |  |                     |                        |
| SOT363          |            |       | SC-88 |  |                     | -04-11-08-<br>06-03-16 |

Fig 11. Package outline SOT363 (SC-88)

XSON6: plastic extremely thin small outline package; no leads; 6 terminals; body  $1 \times 1.45 \times 0.5$  mm

SOT886


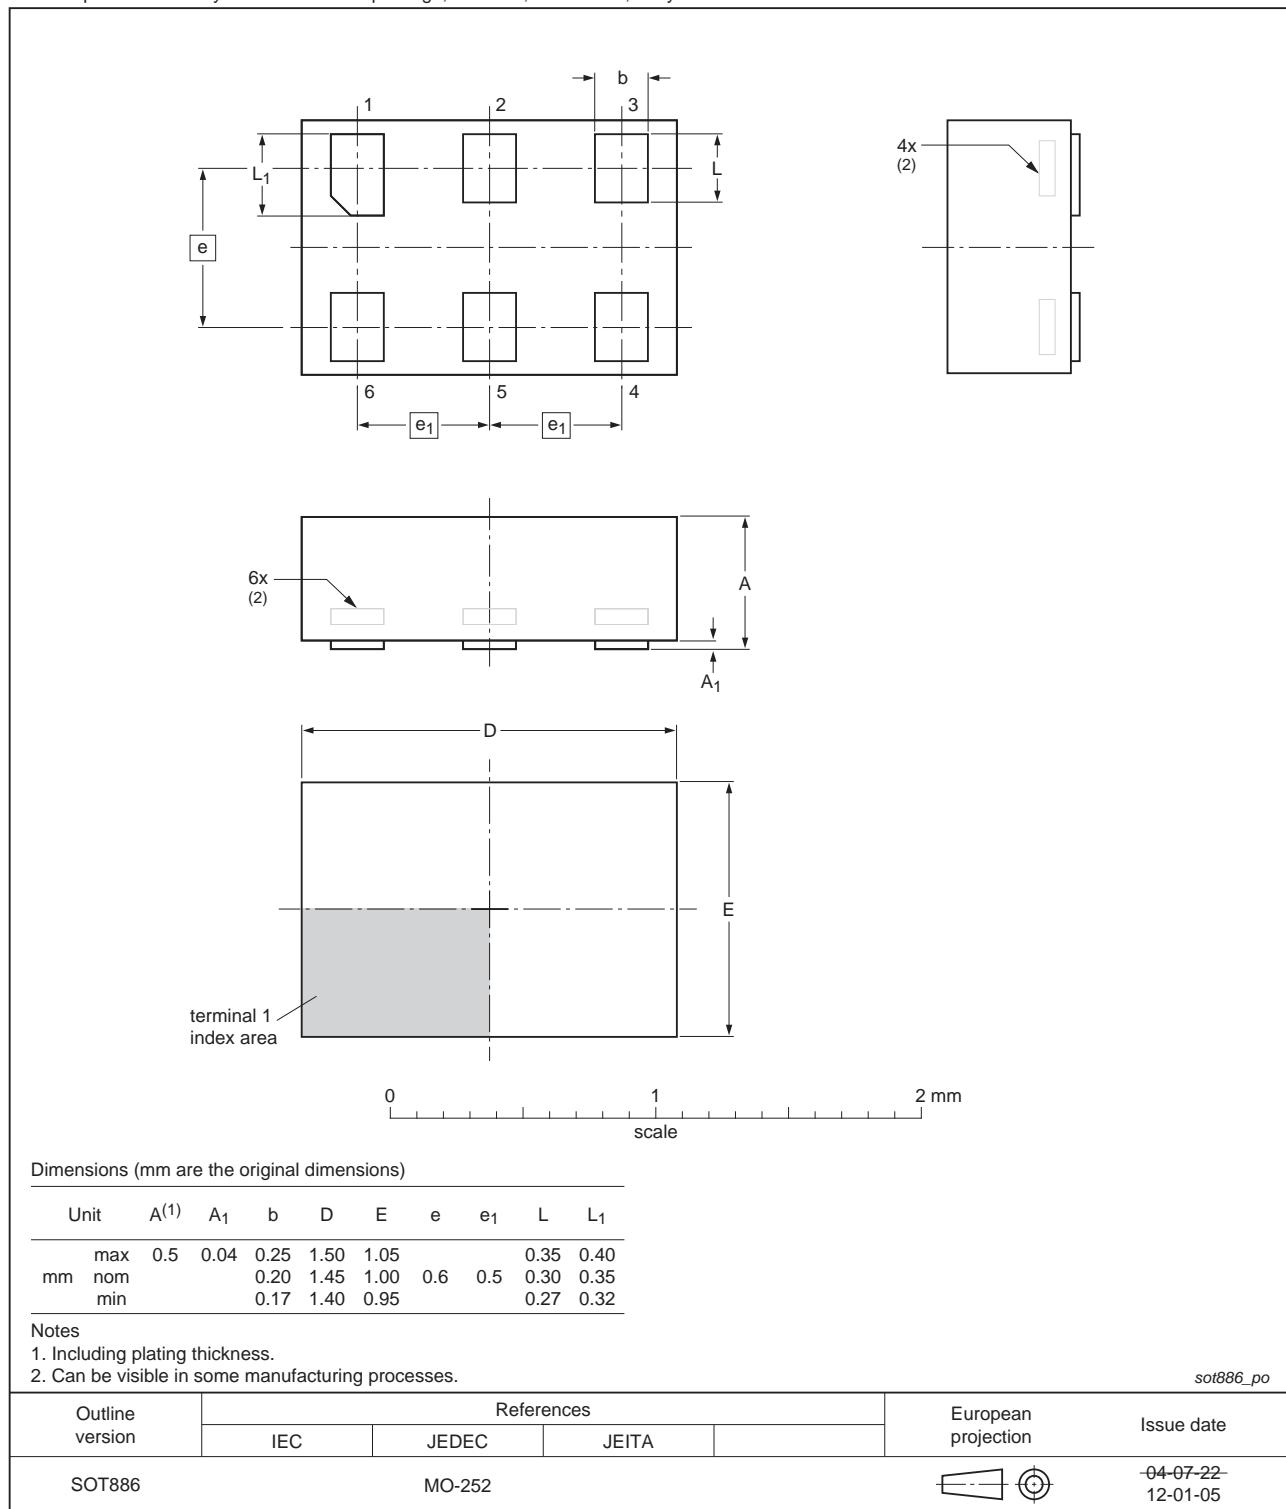


Fig 12. Package outline SOT886 (XSON6)

XSON6: plastic extremely thin small outline package; no leads; 6 terminals; body 1 x 1 x 0.5 mm

SOT891

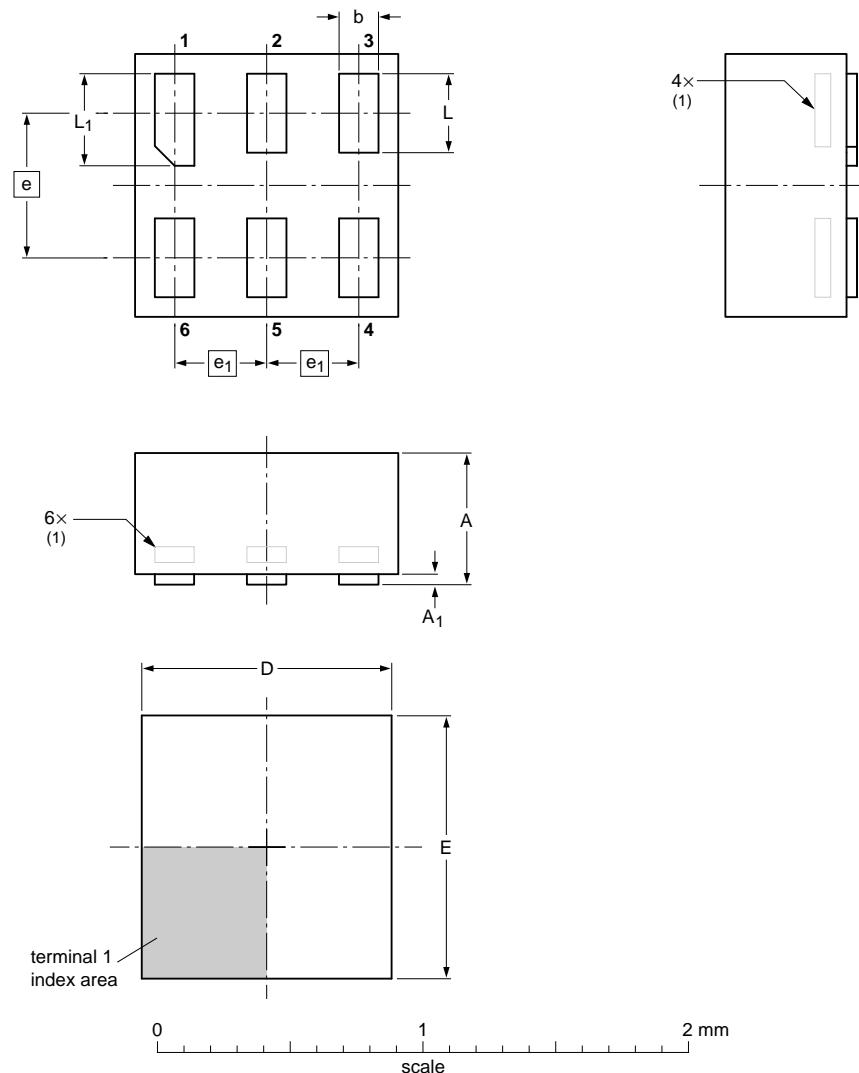

## DIMENSIONS (mm are the original dimensions)

| UNIT | A<br>max | A1<br>max | b            | D            | E            | e    | e1   | L            | L1           |
|------|----------|-----------|--------------|--------------|--------------|------|------|--------------|--------------|
| mm   | 0.5      | 0.04      | 0.20<br>0.12 | 1.05<br>0.95 | 1.05<br>0.95 | 0.55 | 0.35 | 0.35<br>0.27 | 0.40<br>0.32 |

## Note

1. Can be visible in some manufacturing processes.

| OUTLINE<br>VERSION | REFERENCES |       |       |  | EUROPEAN<br>PROJECTION | ISSUE DATE           |
|--------------------|------------|-------|-------|--|------------------------|----------------------|
|                    | IEC        | JEDEC | JEITA |  |                        |                      |
| SOT891             |            |       |       |  |                        | 05-04-06<br>07-05-15 |

Fig 13. Package outline SOT891 (XSON6)

**XSON6: extremely thin small outline package; no leads;  
6 terminals; body 0.9 x 1.0 x 0.35 mm**

SOT1115

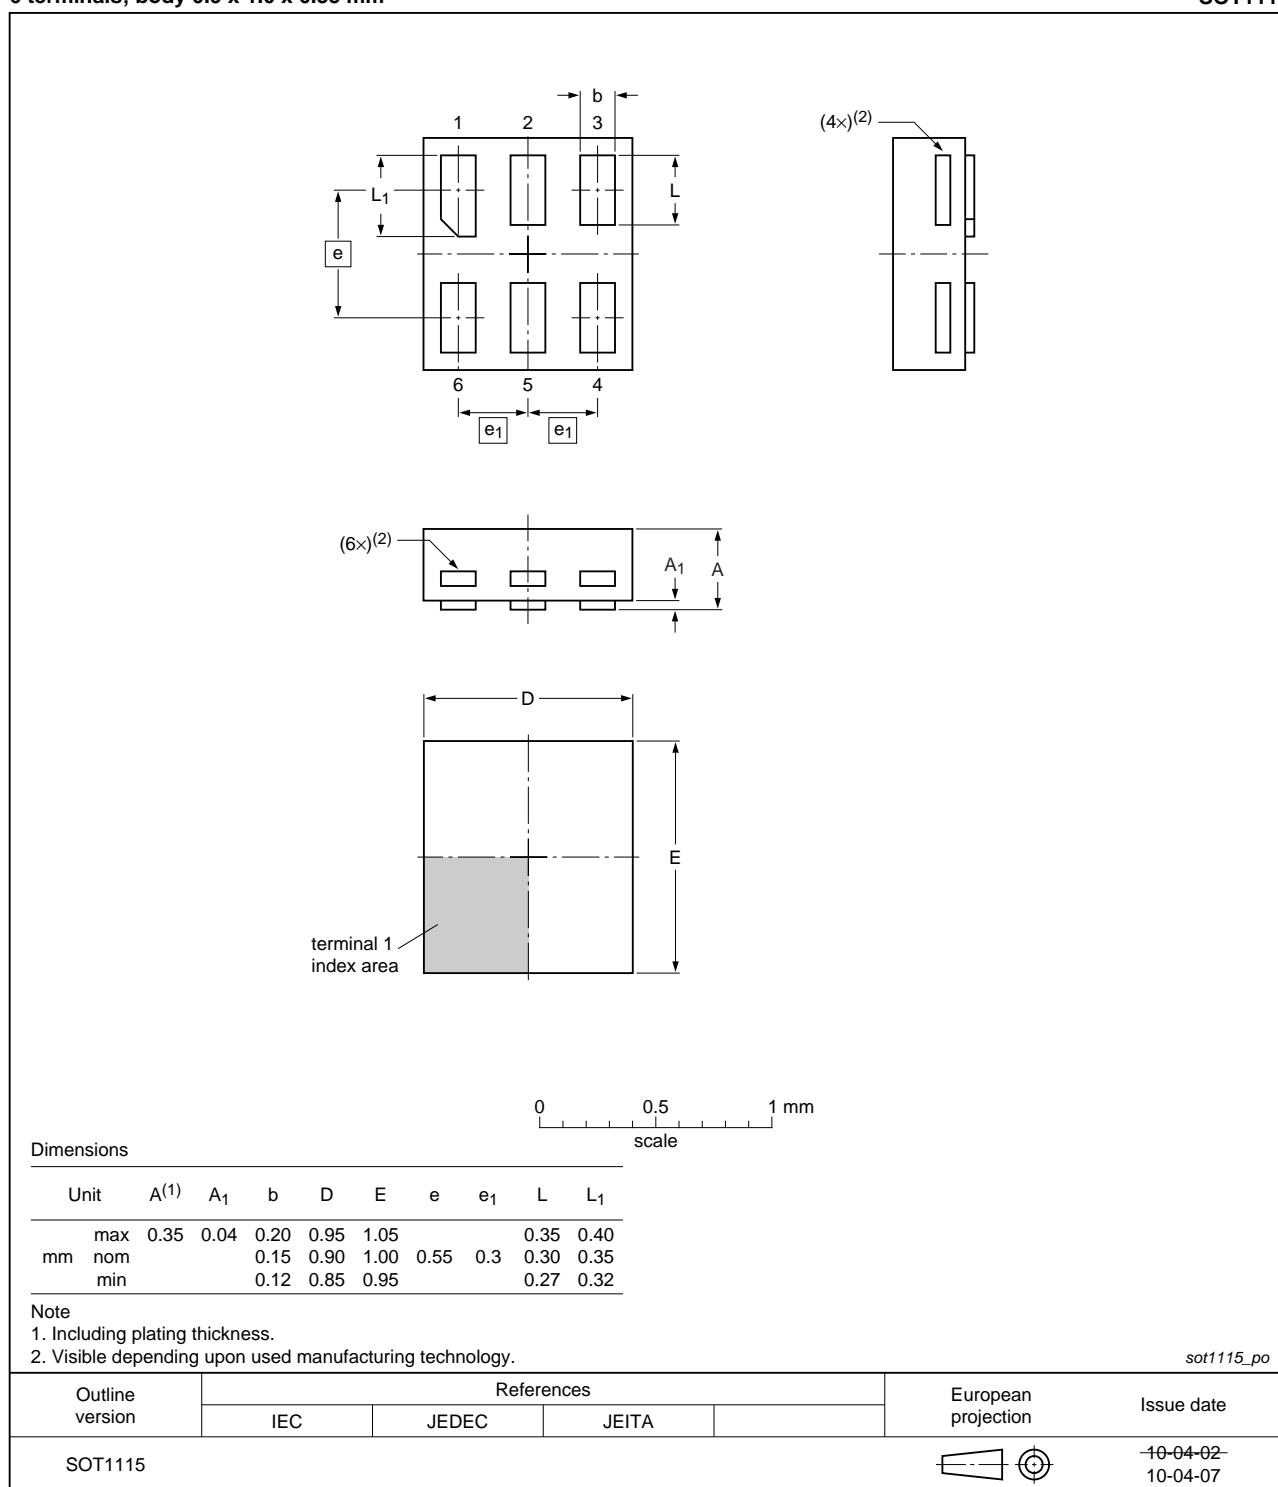


Fig 14. Package outline SOT1115 (XSON6)

**XSON6: extremely thin small outline package; no leads;  
6 terminals; body 1.0 x 1.0 x 0.35 mm**

SOT1202

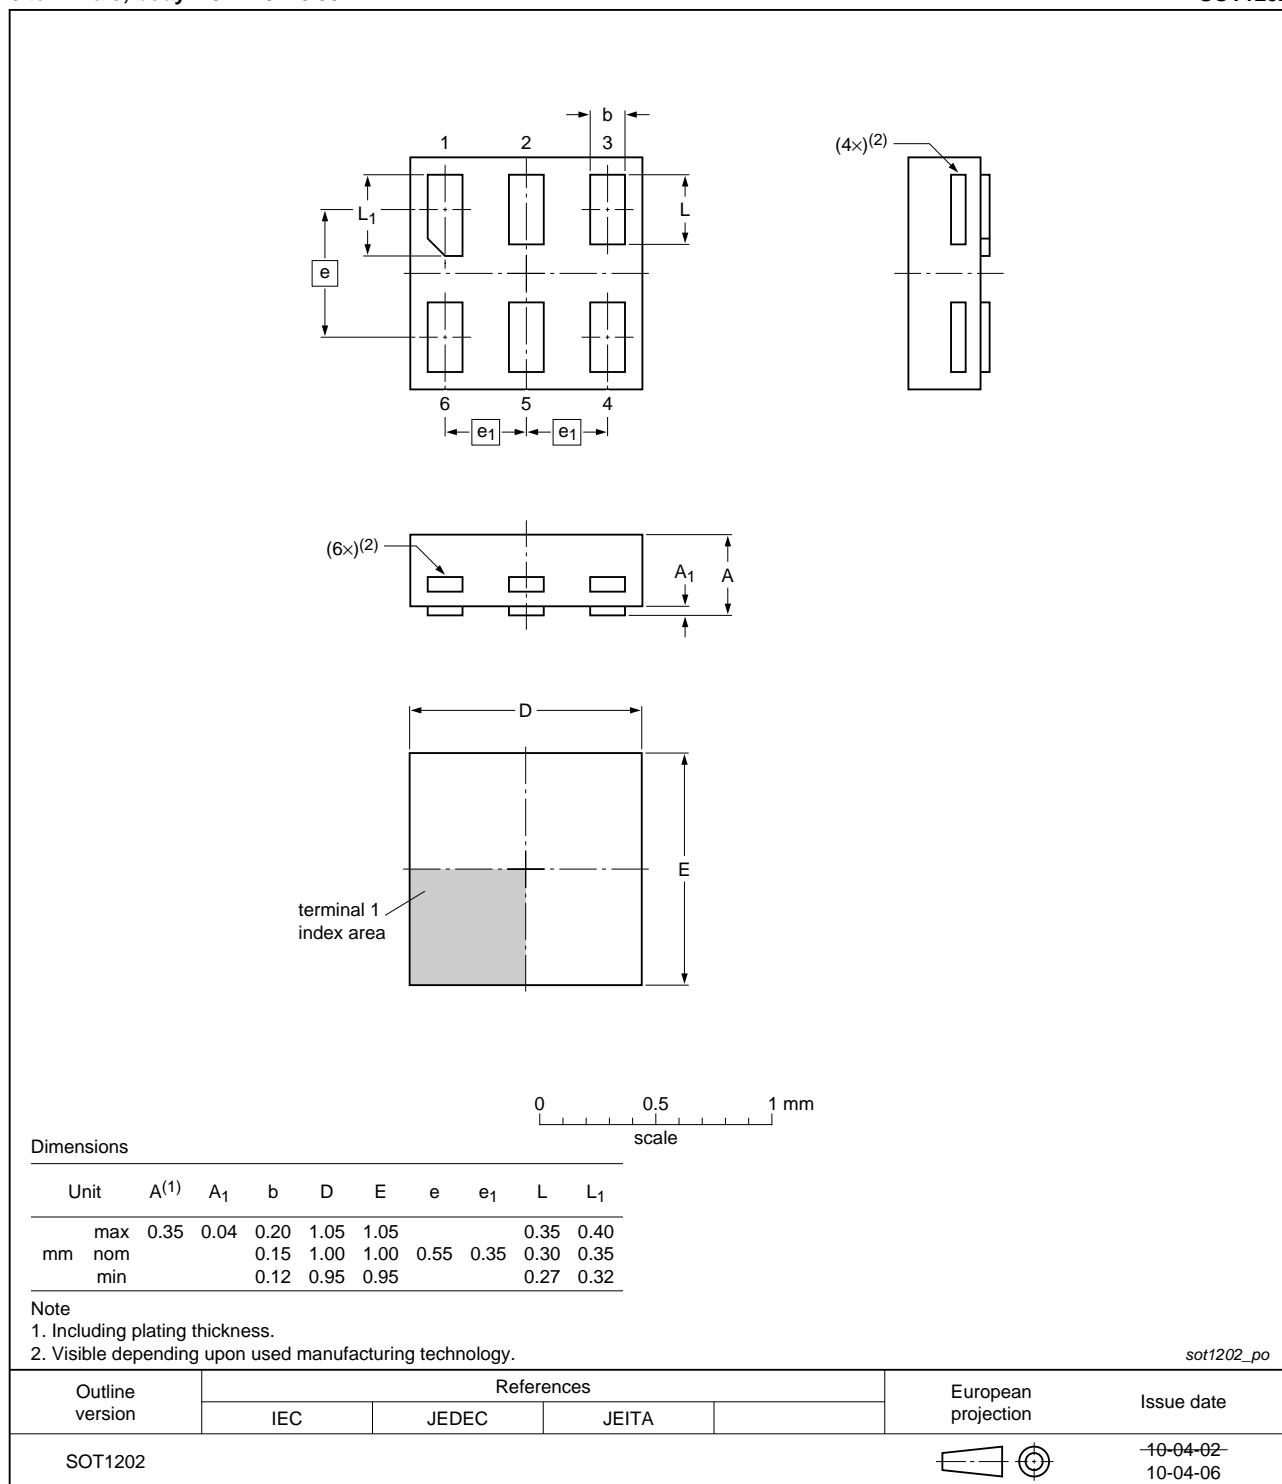


Fig 15. Package outline SOT1202 (XSON6)

## 15. Abbreviations

**Table 13. Abbreviations**

| Acronym | Description             |
|---------|-------------------------|
| CDM     | Charged Device Model    |
| DUT     | Device Under Test       |
| ESD     | ElectroStatic Discharge |
| HBM     | Human Body Model        |
| MM      | Machine Model           |

## 16. Revision history

**Table 14. Revision history**

| Document ID    | Release date | Data sheet status   | Change notice | Supersedes    |
|----------------|--------------|---|---------------|---------------|
| 74AUP1T45 v.5  | 20120809     | Product data sheet  | -             | 74AUP1T45 v.4 |
| Modifications: |              | • Package outline drawing of SOT886 ( <a href="#">Figure 12</a> ) modified. |               |               |
| 74AUP1T45 v.4  | 20111128     | Product data sheet  | -             | 74AUP1T45 v.3 |
| Modifications: |              | • Legal pages updated.  |               |               |
| 74AUP1T45 v.3  | 20101104     | Product data sheet  | -             | 74AUP1T45 v.2 |
| 74AUP1T45 v.2  | 20090803     | Product data sheet  | -             | 74AUP1T45 v.1 |
| 74AUP1T45 v.1  | 20061018     | Product data sheet  | -             | -             |

## 17. Legal information

### 17.1 Data sheet status

| Document status <sup>[1][2]</sup> | Product status <sup>[3]</sup> | Definition  |
|-----------------------------------|-------------------------------|---|
| Objective [short] data sheet      | Development                   | This document contains data from the objective specification for product development. |
| Preliminary [short] data sheet    | Qualification                 | This document contains data from the preliminary specification.                       |
| Product [short] data sheet        | Production                    | This document contains the product specification.                                     |

[1] Please consult the most recently issued document before initiating or completing a design.

[2] The term 'short data sheet' is explained in section "Definitions".

[3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL <http://www.nxp.com>.

### 17.2 Definitions

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. NXP Semiconductors does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

**Short data sheet** — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local NXP Semiconductors sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

**Product specification** — The information and data provided in a Product data sheet shall define the specification of the product as agreed between NXP Semiconductors and its customer, unless NXP Semiconductors and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the NXP Semiconductors product is deemed to offer functions and qualities beyond those described in the Product data sheet.

**Suitability for use** — NXP Semiconductors products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an NXP Semiconductors product can reasonably be expected to result in personal injury, death or severe property or environmental damage. NXP Semiconductors and its suppliers accept no liability for inclusion and/or use of NXP Semiconductors products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. NXP Semiconductors makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using NXP Semiconductors products, and NXP Semiconductors accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the NXP Semiconductors product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

NXP Semiconductors does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using NXP Semiconductors products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). NXP does not accept any liability in this respect.

**Limiting values** — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

**Terms and conditions of commercial sale** — NXP Semiconductors products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.nxp.com/profile/terms>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. NXP Semiconductors hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of NXP Semiconductors products by customer.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

### 17.3 Disclaimers

**Limited warranty and liability** — Information in this document is believed to be accurate and reliable. However, NXP Semiconductors does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. NXP Semiconductors takes no responsibility for the content in this document if provided by an information source outside of NXP Semiconductors.

In no event shall NXP Semiconductors be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, NXP Semiconductors' aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the *Terms and conditions of commercial sale* of NXP Semiconductors.

**Right to make changes** — NXP Semiconductors reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

**Non-automotive qualified products** — Unless this data sheet expressly states that this specific NXP Semiconductors product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. NXP Semiconductors accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without NXP Semiconductors' warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond

NXP Semiconductors' specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies NXP Semiconductors for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond NXP Semiconductors' standard warranty and NXP Semiconductors' product specifications.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

## 17.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

## 18. Contact information

For more information, please visit: <http://www.nxp.com>

For sales office addresses, please send an email to: [salesaddresses@nxp.com](mailto:salesaddresses@nxp.com)

## 19. Contents

|           |   |           |
|-----------|---|-----------|
| <b>1</b>  | <b>General description</b> .....                  | <b>1</b>  |
| <b>2</b>  | <b>Features and benefits</b> .....                | <b>1</b>  |
| <b>3</b>  | <b>Ordering information</b> .....                 | <b>2</b>  |
| <b>4</b>  | <b>Marking</b> .....                              | <b>2</b>  |
| <b>5</b>  | <b>Functional diagram</b> .....                   | <b>2</b>  |
| <b>6</b>  | <b>Pinning information</b> .....                  | <b>3</b>  |
| 6.1       | Pinning .....                                     | 3         |
| 6.2       | Pin description .....                             | 3         |
| <b>7</b>  | <b>Functional description</b> .....               | <b>3</b>  |
| <b>8</b>  | <b>Limiting values</b> .....                      | <b>4</b>  |
| <b>9</b>  | <b>Recommended operating conditions</b> .....     | <b>4</b>  |
| <b>10</b> | <b>Static characteristics</b> .....               | <b>5</b>  |
| <b>11</b> | <b>Dynamic characteristics</b> .....              | <b>11</b> |
| <b>12</b> | <b>Waveforms</b> .....                            | <b>23</b> |
| <b>13</b> | <b>Application information</b> .....              | <b>25</b> |
| 13.1      | Unidirectional logic level-shifting application . | 25        |
| 13.2      | Bidirectional logic level-shifting application..  | 26        |
| 13.3      | Power-up considerations .....                     | 27        |
| 13.4      | Enable times.....                                 | 27        |
| <b>14</b> | <b>Package outline</b> .....                      | <b>28</b> |
| <b>15</b> | <b>Abbreviations</b> .....                        | <b>33</b> |
| <b>16</b> | <b>Revision history</b> .....                     | <b>33</b> |
| <b>17</b> | <b>Legal information</b> .....                    | <b>34</b> |
| 17.1      | Data sheet status .....                           | 34        |
| 17.2      | Definitions .....                                 | 34        |
| 17.3      | Disclaimers .....                                 | 34        |
| 17.4      | Trademarks.....                                   | 35        |
| <b>18</b> | <b>Contact information</b> .....                  | <b>35</b> |
| <b>19</b> | <b>Contents</b> .....                             | <b>36</b> |

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

© NXP B.V. 2012.

All rights reserved.

For more information, please visit: <http://www.nxp.com>

For sales office addresses, please send an email to: [salesaddresses@nxp.com](mailto:salesaddresses@nxp.com)

Date of release: 9 August 2012

Document identifier: 74AUP1T45