

FEATURES

- 6-phase & 8-phase dual output PWM Controller
 - Phases are flexibly assigned between Loops 1 & 2
 - Intel® VR12, AMD® 3.4MHz SVI/PVI & Memory modes
 - Overclocking & Gaming Mode with Vmax setting
 - Switching frequency from 200kHz to 1.2MHz per phase
 - IR Efficiency Shaping Features including Variable Gate Drive and Dynamic Phase Control
 - Programmable 1-phase or 2-phase for Light Loads and Active Diode Emulation for Very Light Loads
 - IR Adaptive Transient Algorithm (ATA) on both loops minimizes output bulk capacitors and system cost
 - Auto-Phase Detection with auto-compensation
 - Per-Loop Fault Protection: OVP, UVP, OCP, OTP, CFP
 - I2C/SMBus/PMBus system interface for telemetry of Temperature, Voltage, Current & Power for both loops
 - Non-Volatile Memory (NVM) for custom configuration
 - Compatible with IR ATL and 3.3V Tri-state Drivers
 - +3.3V supply voltage; -20°C to 85°C ambient operation
 - Pb-Free, RoHS, 7x7 48-pin & 8x8 56-pin QFN packages

APPLICATIONS

- Intel® VR12 & AMD® SVI & PVI based systems
 - DDR Memory with Vtt tracking
 - Overclocked & Gaming platforms

PIN DIAGRAM




Figure 1: IR3536A Package Top View

DESCRIPTION

The IR3536A and IR3538A are dual-loop digital multi-phase buck controllers. The IR3536A drive up to 6 phases and the IR3538A drives up to 8 phases. The IR3536A and IR3538A are fully Intel® VR12 and AMD® SVI/PVI compliant on both loops and provide a V_{tt} tracking function for DDR memory.

The IR3536A and IR3538A include the IR Efficiency Shaping Technology to deliver exceptional efficiency at minimum cost across the entire load range.

IR Variable Gate Drive optimizes the MOSFET gate drive voltage based on real-time load current. IR Dynamic Phase Control adds/drops phases based upon load current. The IR3536A and IR3538A can be configured to enter 1-phase operation and active diode emulation mode automatically or by command.

IR's unique Adaptive Transient Algorithm (ATA), based on proprietary non-linear digital PWM algorithms, minimizes output bulk capacitors.

The I²C/PMBus interface can communicate with up to 16 IR3536A and IR3538A based VR loops. Device configuration and fault parameters are easily defined using the IR Intuitive Power Designer (DPDC) GUI and stored in on-chip NVM.

The IR3536A and IR3538A provides extensive OVP, UVP, OCP and OTP fault protection and includes thermistor based temperature sensing with VR_HOT signal.

NVM storage saves pins and enables a small package size. The IR3536A and IR3538A also include numerous features like register diagnostics for fast design cycles and platform differentiation, truly simplifying VRD design and enabling fastest time-to-market with its “set-and-forget” methodology.


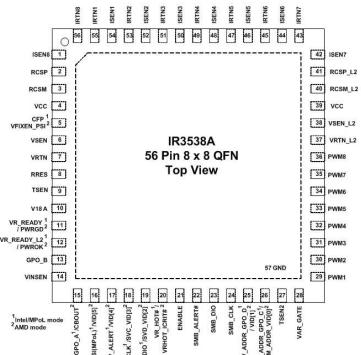


Figure 2: IR3538A Package Top View

ORDERING INFORMATION

IR353□AM

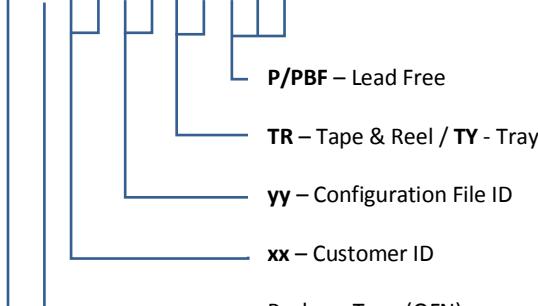

Part –


6: IR3536A

8: IR3538A

Package	Packing Qty	Part Number	Programming
QFN	TR=3000 TY=2600	IR3536AMTRPBF IR3536AMTPBF	Default
QFN	TR=3000 TY=2600	IR3538AMTRPBF IR3538AMTPBF	Default
QFN	TR=3000	IR3536AMxxyyTRP¹	Customer Configuration
QFN	TR=3000	IR3538AMxxyyTRP¹	Customer Configuration

Notes:

1. Customer Specific Configuration File, where xx = Customer ID and yy = Configuration File (Codes assigned by IR Marketing).

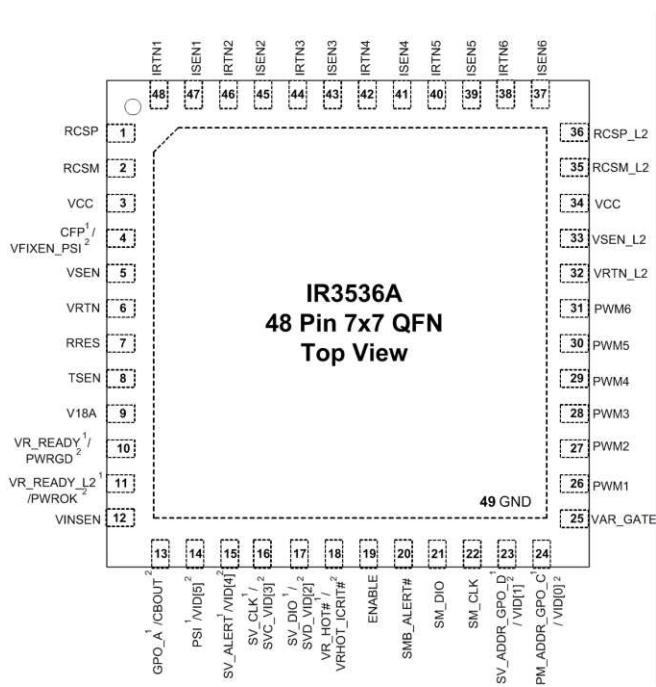

TYPICAL APPLICATIONS BLOCK DIAGRAMS

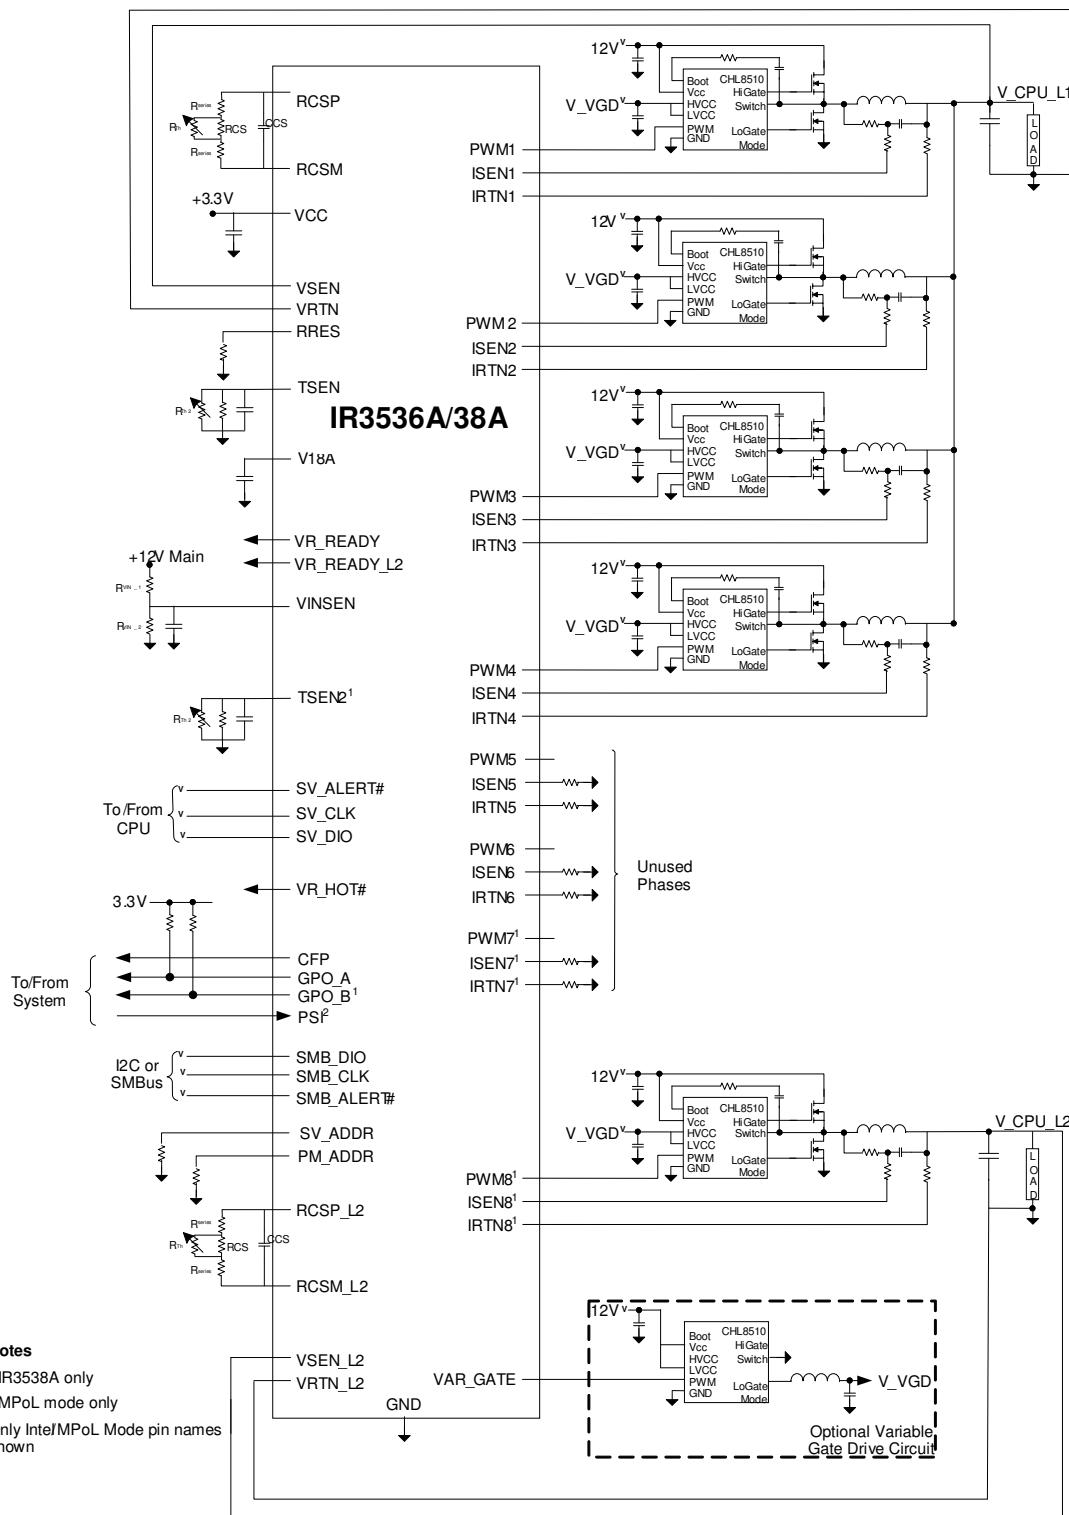


Figure 6: Dual-Loop VRD using IR3536A / IR3538A Controller and CHL8510 MOSFET drivers in 4+1, Intel Mode configuration

Data and specifications subject to change without notice.
This product will be designed and qualified for the Consumer market.
Qualification Standards can be found on IR's Web site.

International
IR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-710TAC Fax: (310) 252-7903

Visit us at www.irf.com for sales contact information.

www.irf.com