# Standard Slip Rings 1001808-001 Datasheet



### Description

Aeroflex Airflyte has developed a standard line of slip ring assemblies that can be used for the transmission of low level signals up to 2 amperes per circuit. These capsules feature gold alloy contacts, precision ball bearings, #26 AWG Teflon insulated lead wires, and are cast in a durable high tech plastic. Each circuit has redundant contacts that ride in V-grooved rings. This design provides the lowest electrical noise in its class. These smooth running units operate with a very minimal amount of torque and are an excellent choice for transmitting electrical signals through a rotating joint.

#### **Features**

- Transfers power, analog, digital and video signals
- 32 circuits
- Compact size
- Electrical Noise < 10 milliohm at max speed
- Speeds up to 60 rpm
- Gold on gold contacts
- Precision ball bearings
- RoHS Compliant
- Made in USA

### **Typical Applications**

- Pan / tilt positioners
- Remote weapon stations
- Robotic systems
- Medical equipment
- Electrical test equipment
- Manufacturing equipment




## Standard Slip Rings 1001808-001 Datasheet



## **Specifications**

| Number of Circuits    | 32 Total                                      |
|-----------------------|---|
|                       | 8 Power circuits                              |
|                       | 24 Signal circuits                            |
| Current Rating        | 8 Amps per Power circuit maximum              |
|                       | 2 Amps per Signal circuit maximum             |
| Voltage               | Micro-volts to 210 VDC / 240 VAC              |
| Dielectric Strength   | 500 VRMS, all combinations                    |
| Insulation Resistance | 1000 megaohms min. @ 500 VDC                  |
| Electrical Noise      | 10 milliohms maximum                          |
| Lead Wire             | #26 AWG, Teflon insulated, stranded conductor |
| Lead Wire Length      | 24"   |
| Operating Speed       | 0 to 60 rpm maximum, intermittent             |
| Contacts              | Gold on Gold                                  |
| Rotation              | Bi-directional                                |
| Temperature Range     | -40°C to +80°C                                |

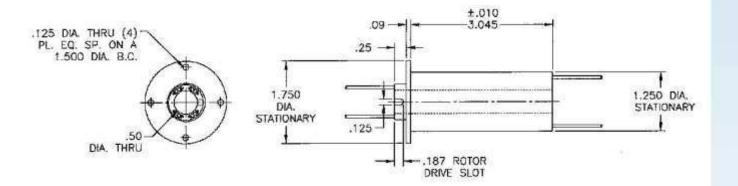

#### **Aeroflex Airflyte**

3030 Horseshoe Drive South, Naples, FL 34104 Tel: (239) 263-3102 Fax: (239) 261-3110

Aeroflex Airflyte reserves the right to make changes to any products and services herein at any time without notice. Consult Aeroflex or an authorized sales representative to verify that the information in this data sheet is current before using this product. Aeroflex does not assume any responsibility or liability arising out of the application or use of any product or service described herein, except as expressly agreed to in writing by Aeroflex; nor does the purchase, lease or use of a product or service from Aeroflex convey a license under any patent rights, copyrights, trademark rights, or any other of the intellectual rights of Aeroflex or of third parties.

Copyright 2011 Aeroflex Airflyte All rights reserved Rev. A