

A/AH ATTENUATORS

SMA, up to 18GHz, 2 Watts

SPECIFICATIONS:

Models: A, AH

RoHS
Compliant

AEROFLEX
A passion for performance.

Electrical:

Frequency Range _____ DC - 18 GHz
 Standard Freq. Values _____ 2.5, 6, 18 GHz
 Standard dB Values _____ 0-10, 12, 15, 20, 30 & 40 dB
In 1 dB Increments

Attenuation Accuracy _____ DC - 18 GHz
 0 - 6 dB _____ ±0.3 dB
 7 - 20 dB _____ ±0.5 dB
 21 - 30 dB _____ ±0.75 dB
 40 dB _____ ± 1.5 dB

VSWR _____
 DC - 4 GHz _____ 1.15:1 Max.
 4 - 8 GHz _____ 1.20:1 Max.
 8 - 12.4 GHz _____ 1.25:1 Max.
 12.4 - 18 GHz _____ 1.35:1 Max.


Input Power _____ 2 Watts Avg. @ 25°C
Derated Linearly to 0.5 Watts @ +125°C

Peak Power _____ 250 Watts Max.
(5uSec Pulse, .05% Duty Cycle)


Impedance _____ 50 Ohms
 Operating Temp Range _____ -65°C to +125°C

Mechanical:

SMA Connectors _____ Passivated Stainless Steel
Mates with MIL-STD-348
 Conductors _____ Gold Plated Beryllium Copper

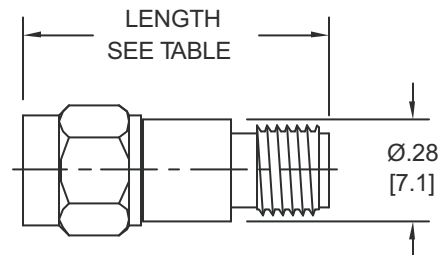


A STYLE

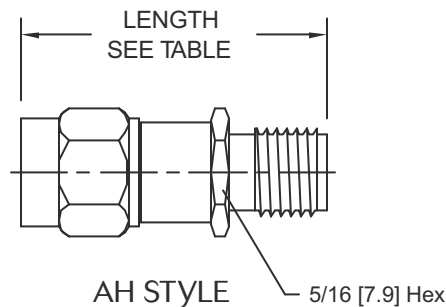

AH STYLE

Connector Configuration	LENGTH			
	0 - 12 dB		13 - 40 dB	
	Inches	Millimeters	Inches	Millimeters
Male/Female	.86 ±.03	[21.8 ±0.8]	.99 ±.03	[25.1 ±0.8]
Male/Male	.98 ±.03	[24.9 ±0.8]	1.11 ±.03	[28.2 ±0.8]
Female/Female	.87 ±.03	[22.1 ±0.8]	1.00 ±.03	[25.4 ±0.8]

HOW TO ORDER:

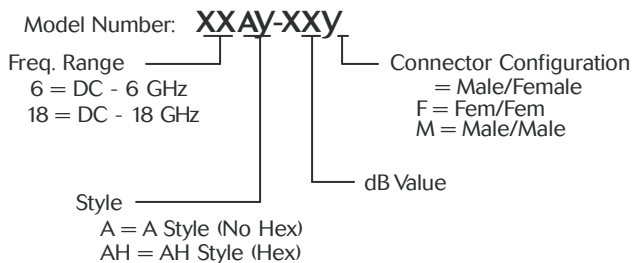

Ordering Examples:

Model Number: **18A-20**
 DC - 18 GHz; 20 dB; SMA - Male/Fem; Style A

Model Number: **18AH-6F**
 DC - 18 GHz; 6 dB; SMA - Fem/Fem; Style AH

Model Number: **6AH-3M**
 DC - 6 GHz; 3 dB; SMA - Male/Male; Style AH

Model Number: **6A-03**
 DC - 6 GHz; 3 dB; SMA - Male/Fem; Style A

Note: Dimensions in Brackets are Expressed in Millimeters and are for Reference Only.
 *Other dB values, units that operate over a more specific frequency band and/or offer very low return loss (VSWR); gold plated units and/or connectors optimized for RF leakage also available.

18A-ATT: REV L (M)



Aeroflex / Inmet, Inc. • 300 Dino Drive, Ann Arbor, MI 48103 • U.S.A.
 888-244-6638 or 734-426-5553 • FAX: 734-426-5557
 www.aeroflex.com/inmet • inmet-sales@eroflex.com