

Shock-Safe Fuseholder, 5 x 20 mm, Fingerrip, horizontal oder vertical



250 VAC/DC · 1.3W/10A10A (UL/CSA)

**Description**

- Screw type fuse carrier
- PCB mounting horizontal or vertical

Standards

- UL 4248-1 / UL 512
- CSA C22.2 no. 39

Approvals


- UL File Number: E41738

Weblinks

[pdf-datasheet](#), [html-datasheet](#), [General Product Information](#), [Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Shop](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

Technical Data

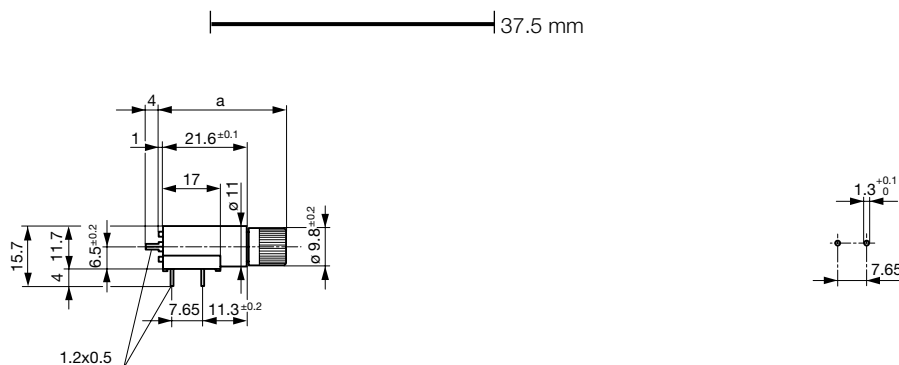

Fuse-Link	5 x 20 mm	Soldering Methods	Wave
Mounting	PCB	Resistance to Vibration	acc. to NF C 20-706 / IEC 60068-2-6, test Fc
Terminal	Solder THT	Shocks	acc. to NF C 20-706 / IEC 60068-2-27
Rated Voltage	250 VAC/DC	Bumps	acc. to NF C 20-729 / IEC 60068-2-29
Rated Current	10 A (UL/CSA)		
Rated Power Acceptance IEC	1.3 W / 10 A @ Ta 23 °C		
Degree of Protection	IP 40		
Protection Class	Suitable for appliances with protection class I or II acc. to IEC 61140		
Admissible Ambient Air Temp.	-40 °C to 85 °C		
Climatic Category	40/085/56 acc. to IEC 60068-1		
Material: Socket	Thermoset, black		
Material: Cap	Thermoplastic, black		
Unit Weight (Socket/Cap)	6 g		
Storage Conditions	0 °C to 60 °C, max. 70% r.h.		
Product Marking	☐, Type, Dielectric strength, Current, Approvals		

Dimensions

a = 33.5 Variants 7091.4210, 7091.4240 and 7091.4270
a = 38.5 Variant 7091.4400

Drilling diagram

Variants

Holder	Cap	Mounting	Degree of Protection	 	GAM T1	NNO	Reference	Order Number
•	Fingergrip	horizontal / vertical	IP 40	•	•	•	231409	7091.4210
•	Fingergrip	vertical	IP 40	•			231409L	7091.4240
•	Fingergrip	horizontal	IP 40	•			231409F	7091.4270
•	Fingergrip	vertical	IP 40				231632NL	7091.4400

Packaging Unit Bulk (10 pcs.)