



- Features:
- Specialized materials, processes and controls ensure a part that is impervious to moisture
 - Small size with high power density
 - Auto sequencing / insertion capable
 - Low cost replacement in many applications using metal glaze resistors
 - RoHS compliant / lead-free


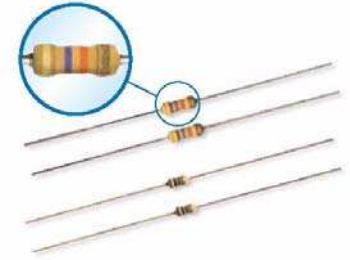


Electrical Specifications				
Type / Code	Power Rating (Watts) @ 70°C	Maximum Working Voltage (1)	Maximum Overload Voltage	Ohmic Range (Ω) and Tolerance
				1%, 2%, 5%
HDM14	0.25W	300V	600V	1 - 2.2M
HDM12	0.5W	350V	700V	1 - 2.2M

(1) Lesser of \sqrt{PR} or maximum working voltage.

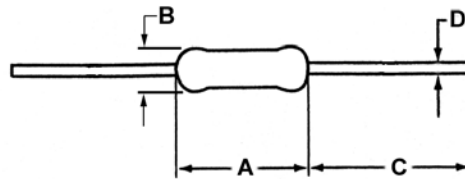


Mechanical Specifications					
Type / Code	A Body Length	B Body Diameter	C Lead Length (Bulk)	D Lead Diameter	Unit
HDM14	0.13 ± 0.01/-0	0.07 ± 0.01	1.1 ± 0.12	0.018 ± 0.002	inches
	3.2 ± 0.2/-0	1.8 ± 0.2	28.0 ± 3.0	0.45 ± 0.05	mm
HDM12	0.24 ± 0.02	0.09 ± 0.01	1.1 ± 0.12	0.024 ± 0.002	inches
	6.0 ± 0.3	2.4 ± 0.2	28.0 ± 3.0	0.6 ± 0.02	mm

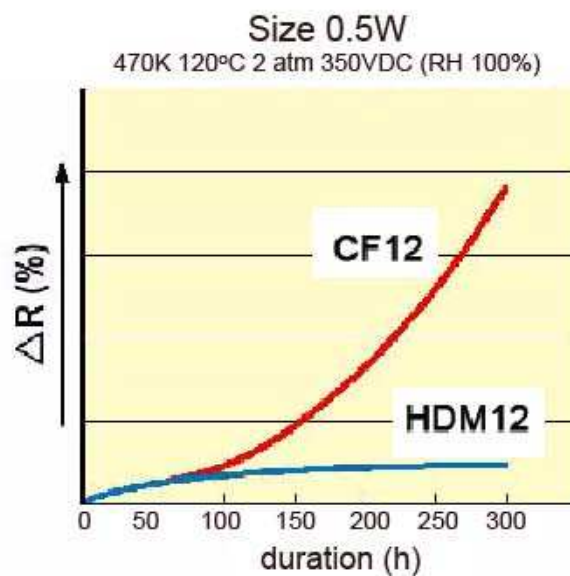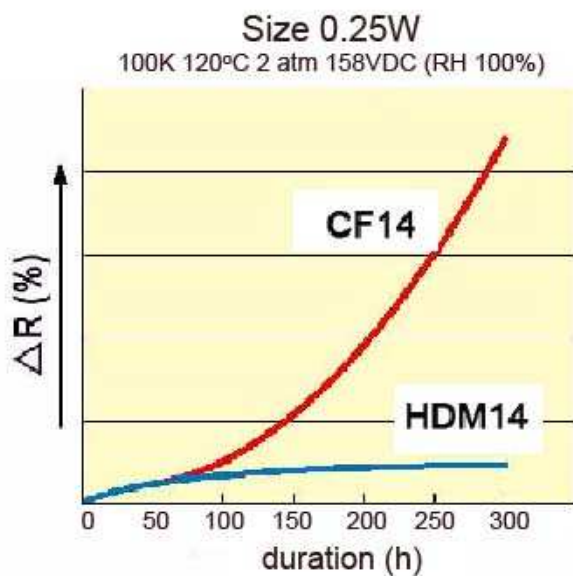

Performance Characteristics		
Item	Performance or Quality Acceptance	Test Condition and Method
TCR - Temperature Coefficient of Resistance	R < 100KΩ: -500 ~ +350ppm/°C 100KΩ ≤ R < 1MΩ: -700 ~ 0ppm/°C R ≥ 1MΩ: -1500 ~ 0ppm/°C	Measure resistance (R ₀) at room temperature (t), after that, measure again the resistance (R) at 100°C higher than room temperature. $TCR = \frac{R-R_0}{R_0} \times \frac{10^6}{(t+100)-t} \text{ (ppm/°C)}$
Overload (Short Time)	Change of resistance ≤±(0.75% + 0.05Ω)	Apply the 2.5 times rated voltage or max overload voltage whichever is lower for 5 seconds and leave in room temperature for one hour after test.
Damp heat (Steady State)	Change of resistance R < 100KΩ: ≤±(3% + 0.05Ω) R ≥ 100KΩ: ≤±(5% + 0.05Ω)	In the chamber having temperature 40±2°C and relative humidity 93±3%, apply one percent of the power rating, 1.5 hour ON, 0.5 hour OFF for 1000 hours and leave in room temperature for one hour after test.
Load Life	Change of resistance R < 100KΩ: ≤±(2% + 0.05Ω) R ≥ 100KΩ: ≤±(3% + 0.05Ω)	At 70±2°C, apply rated DC voltage 1.5 hour ON, 0.5 hour OFF for 1000 hours and leave in room temperature for one hour after test.
Pressure Cooker Bias Test	Change of resistance ≤±(20% + 0.05Ω)	121°C, 2atm, 98-100%RH. Apply the rated DC voltage for 100 hours.

Reference standards: JIS C5201-1, IEC60115-1

How to Order

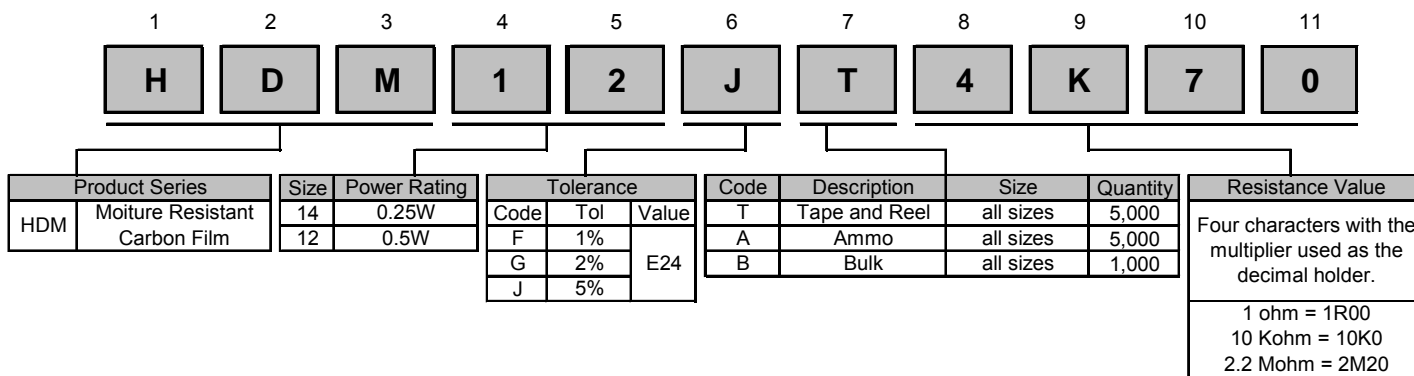

Legacy Part Number (before January 3, 2011):

SEI Type		Code		Nominal Resistance	Tolerance	Packaging					
HDM		1/2		4.7K	5%	R					
Type	Description	Code	Wattage			Tolerance	Values	Types	Qty	Description	Code
HDM	Moisture Resistant Carbon Film	1/4	0.25W			1%	E24	All	5,000	Tape and Reel	R
		1/2	0.5W	2%	Ammo	T					
						5%			All	1,000	Bulk