

FEATURES/BENEFITS

- Latest generation MOSFET technology
- Ultra low on-state resistance
- Low output leakage current
- Built-in overvoltage protection
- Reverse protected triggered control input to avoid linear control risks
- No radiated or conducted disturbances
- IP20 touch-proof flaps



Part Number	Description
SH10DC40	40A, 100 Vdc Solid-State Relay
SH10DC40-16	40A, 60 Vdc Solid-State Relay
SH20DC20-16	20A, 200 Vdc Solid-State Relay
SH20DC40-16	40A, 200 Vdc Solid-State Relay
SH75DC60-16	60A, 75 Vdc Solid-State Relay

Part Number Explanation

SH 10 DC 40 -16
 | | | | |
 Series Line Voltage¹ Switch Type² Output Current – Amps Option³

NOTES

- 1) Line Voltage (peak): 10 = 100 Vdc
- 2) Switch Type: DC = DC
- 3) Option: Internal Voltage Protection

ELECTRICAL SPECIFICATIONS
(+25°C ambient temperature unless otherwise specified)**INPUT (CONTROL) SPECIFICATIONS**

	Min	Max	Units
Control Range	3.5	32	Vdc
Must Turn-Off Voltage	1		Vdc
Reverse Voltage		32	Vdc

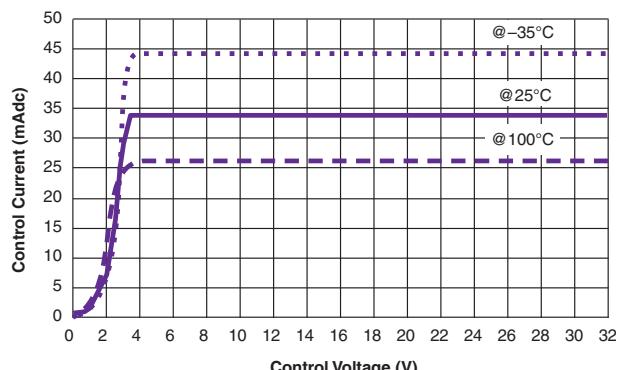
CONTROL CHARACTERISTIC

Figure 2

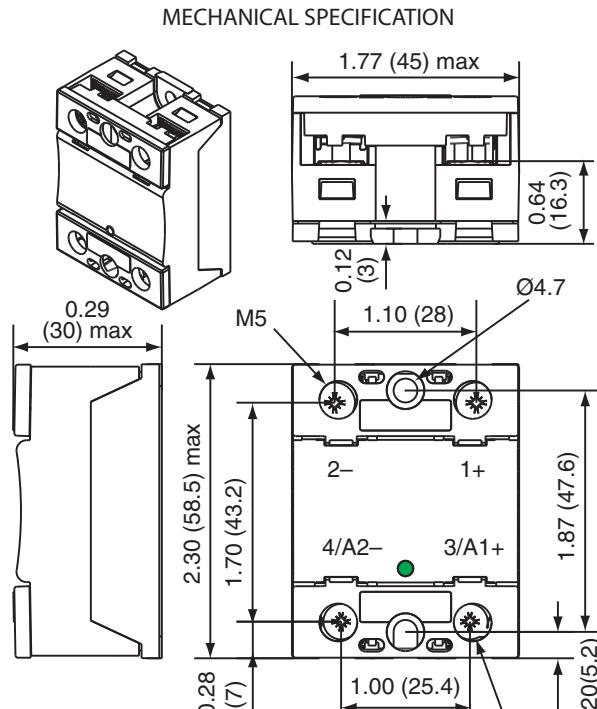


Figure 1

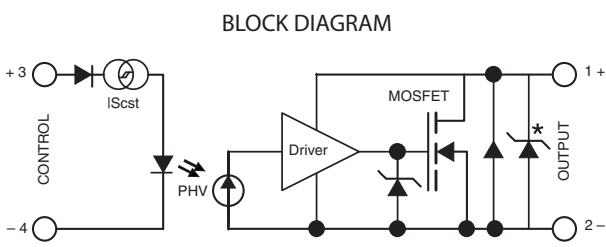


Figure 3

NEW Series SHDC

Output to 60A, 200 Vdc

High Industrial Performance (HIPpak) DC Solid-State Relays

ELECTRICAL SPECIFICATIONS (+25°C ambient temperature unless otherwise specified)

OUTPUT (LOAD) SPECIFICATIONS

	Min	Max	Units
Operating Range			
SH10DC40	5	100	Vdc
SH10DC40-16	5	60	Vdc
SH20DC20-16	5	110	Vdc
SH20DC40-16	5	110	Vdc
SH75DC60-16	5	40	Vdc
Peak Voltage			
SH10DC40	100		Vdc
SH10DC40-16	100		Vdc
SH20DC20-16	200		Vdc
SH20DC40-16	200		Vdc
SH75DC60-16	75		Vdc
Overvoltage Protection (Built-In)			
SH10DC40-16	56V (TVS) ¹		
SH20DCXX-16	75V (MOV Size 20) ²		
SH75DC60-16	39V (TVS) ¹		
1) Transient Voltage Suppressor; 2) Metal Oxide Varistor			
Reverse Voltage Drop			
SH10DC40-16	1.3		V
SH20DCXX-16	1.5		V
SH75DC60-16	0.92		V
Nominal Current (Resistive)			
SH10	40		A
SH20DC20-16	20		A
SH20DC40-16	40		A
SH75DC60-16	60		A
Non-Repetitive Peak Overload Current			
SH10	320		A
SH20DC20-16	160		A
SH20DC40-16	380		A
SH75DC60-16	750		A
Leakage Current			
	3		mA
On-State Resistance (@ 25°C)			
	@25 °C		@125 °C
SH10	15	30	mΩ
SH20DC20-16	45	90	mΩ
SH20DC40-16	23	46	mΩ
SH75DC60-16	4.5	8.2	mΩ

ELECTRICAL SPECIFICATIONS (continued) (+25°C ambient temperature unless otherwise specified)

OUTPUT (LOAD) SPECIFICATIONS

	Min	Max	Units
Output Capacitance (Typical)			
SH10	0.7		nF
SH20DC20-16	0.6		nF
SH20DC40-16	1.1		nF
SH75DC60-16	1.5		nF
Junction-Case Thermal Resistance			
SH10	0.9		°C/W
SH20DC20-16	1.2		°C/W
SH20DC40-16	0.7		°C/W
SH75DC60-16	1.2		°C/W
Built-In Heat Sink Thermal Resistance (Vertically Mounted)			
	10		°C/W
Heat Sink Thermal Time Constant			
	10		min
Control Inputs/Power Outputs			
Insulation Voltage	2.5		kV
Turn-On Time	20		μs
Turn-On Delay	20		μs
Turn-Off Time	20		μs
Turn-Off Delay	20		μs
On-Off Frequency	1000*		Hz

*For high frequency, take two times the load current to calculate the heat sink.

TIME DIAGRAMS

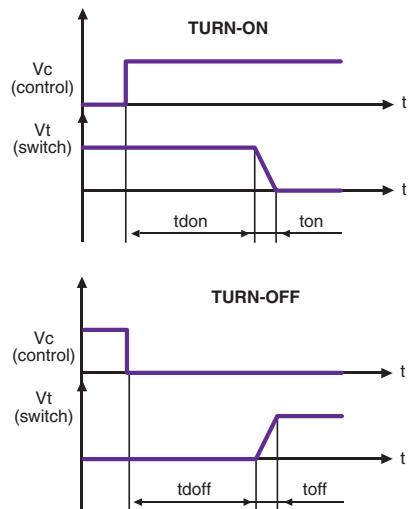
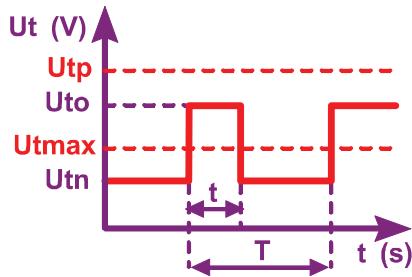


Figure 4

BUILT IN OVERVOLTAGE PROTECTION CHARACTERISTICS

 **$U_{to} < U_{tp}$**

$$t_{\max} = \frac{0.75}{(U_{to} - U_{t\max}) \times I_e}$$

$$P_{(\text{protection})} = 1W_{\max}$$

$$\Rightarrow \frac{(U_{to} - U_{t\max}) \times I_e \times t}{T} \leq 1$$

- I_{elk} : Leakage current of relay
- I_e : User load nominal current
- U_{tp} : Relay max. non repetitive peak voltage
- $U_{t\max}$: Max. nominal voltage of relay

 U_{to} : Possible overvoltage above $U_{t\max}$ U_{tn} : User power supply voltage t : Overvoltage duration T : Time between 2 overvoltages

SH10DC40-16

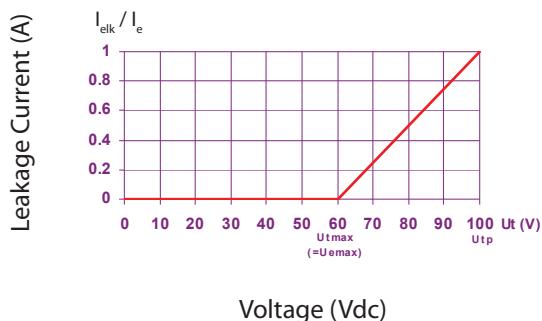


Figure 5a

SH20DC20-16 & SH20DC40-16


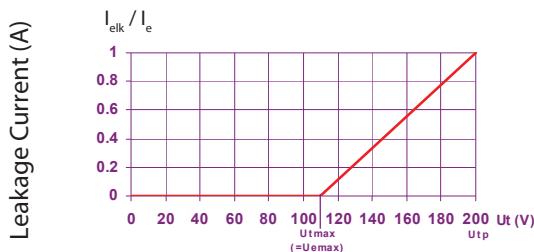


Figure 5b

SH75DC-16

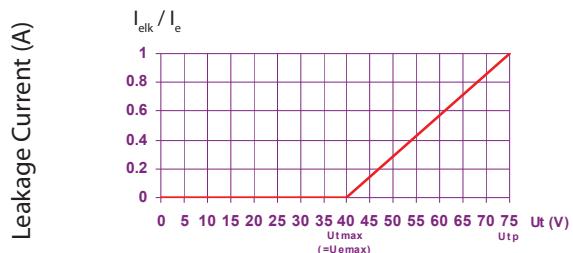

Voltage (Vdc)

Figure 5c

NEW Series SHDC

Output to 60A, 200 Vdc

High Industrial Performance (HIPpak) DC Solid-State Relays

HIGH SIDE WIRING DIAGRAM (Load Connected to "—")

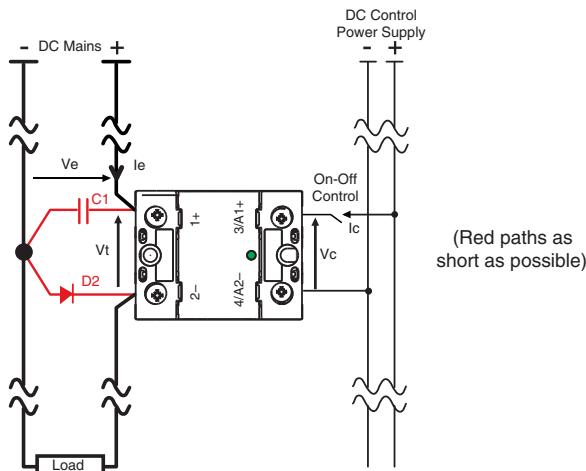


Figure 6a

LOW SIDE WIRING DIAGRAM (Load Connected to "+")

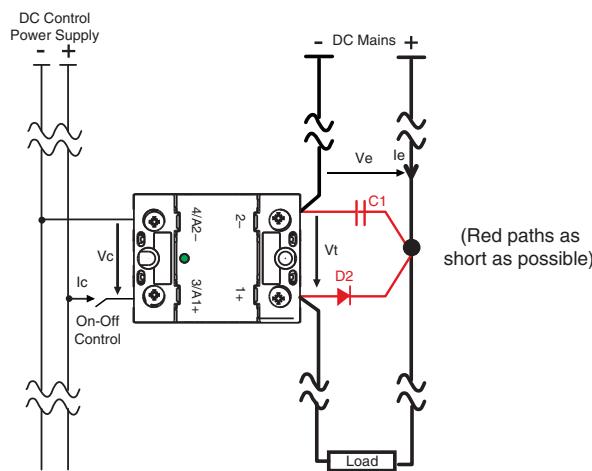


Figure 6b

GENERAL SPECIFICATIONS

(+25°C ambient temperature unless otherwise specified)

ENVIRONMENTAL SPECIFICATIONS

	Min	Max	Units
Operating Temperature	-25	+90	°C
Storage Temperature	-40	+100	°C
Input-Output Isolation	2.5	kV	
Insulation Resistance	1	GΩ	
Insulation Capacitance	8	pF	
Junction Temperature			
Steady State		125	°C
Transient		175	°C
Case Temperature		100	°C

CONNECTIONS

	Power	Control
Screwdriver	POZIDRIV2	
Tightening Torque	2 N.m	1.2 N.m
Insulated crimp terminals (Round Tabs, Eyelet Type)	M5	M4

MISCELLANEOUS

Display	Green LED (ON)
Housing	UL94V0
Mounting	2 screws (M4x12mm)
Noise Level	No audible noise

GENERAL

Standards	IEC60947-1
Protection Level	IP20
Protection Against Direct Touch	Yes
CE Marking	Yes

E.M.C. EMISSION

Radiated & Conducted Disturbances Pending

ACCESSORIES

Faston: Contact Factory



NOTES

- For additional/custom options, contact factory.

OUTPUT RELAY CHARACTERISTIC CURVES FOR SH10DC40 & SH10DC40-16

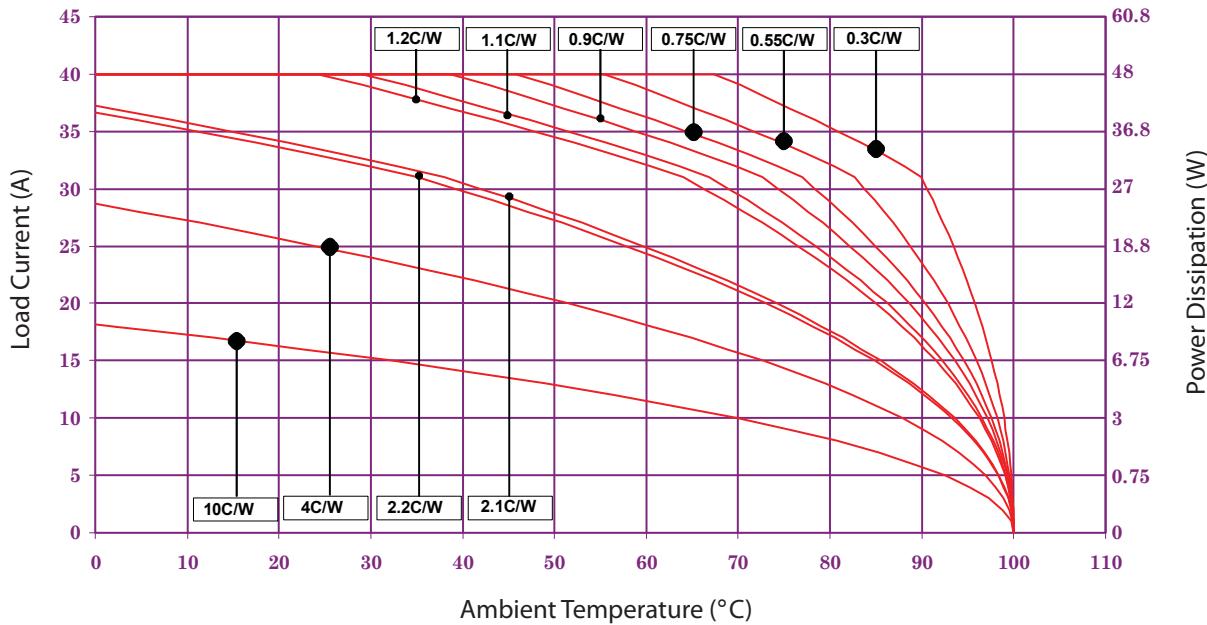


Figure 7a

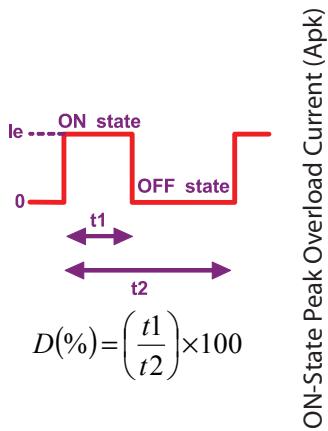


Figure 7b

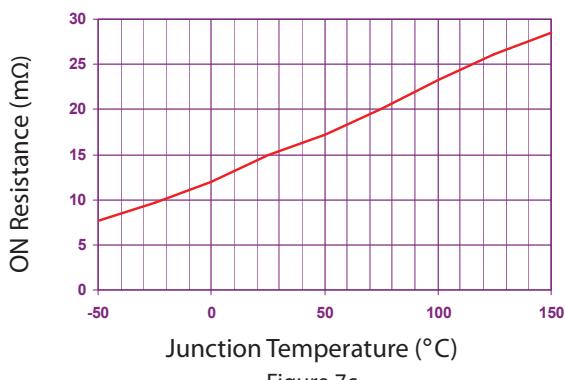


Figure 7c

OUTPUT RELAY CHARACTERISTIC CURVES FOR SH20DC20-16

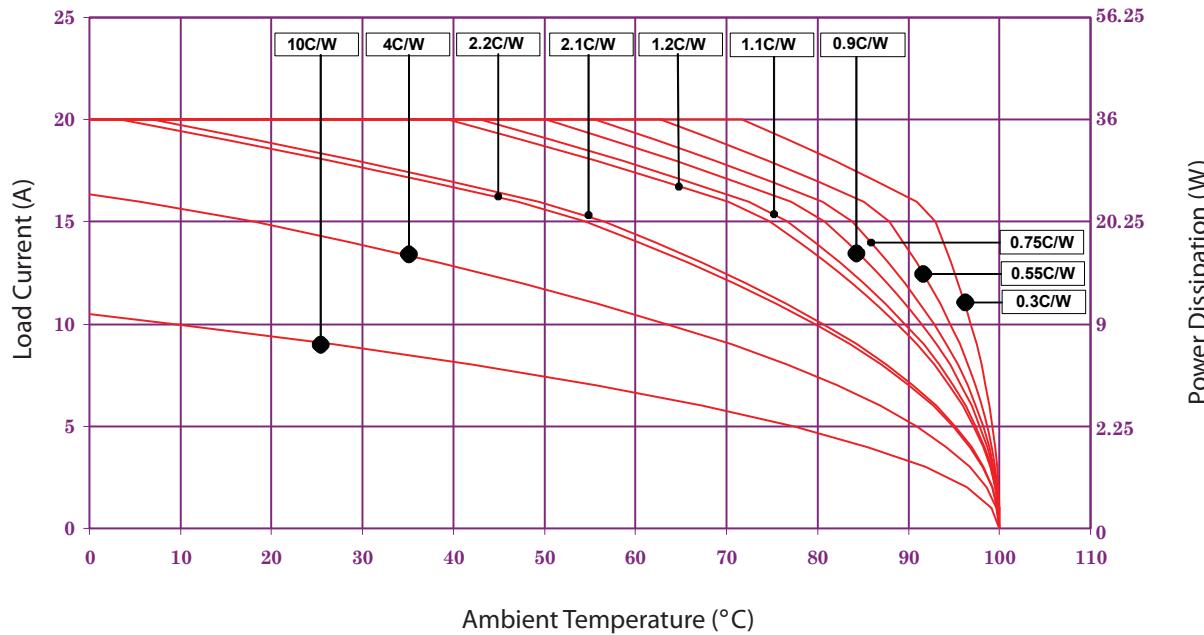


Figure 8a

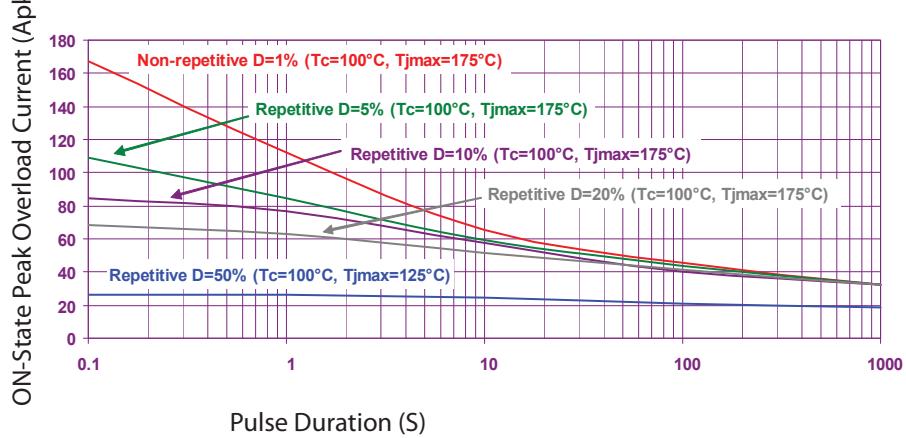
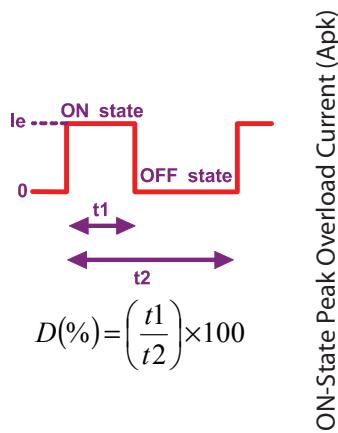


Figure 8b

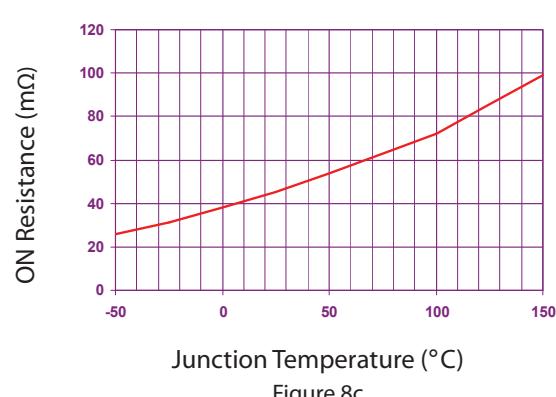


Figure 8c

OUTPUT RELAY CHARACTERISTIC CURVES FOR SH20DC40-16

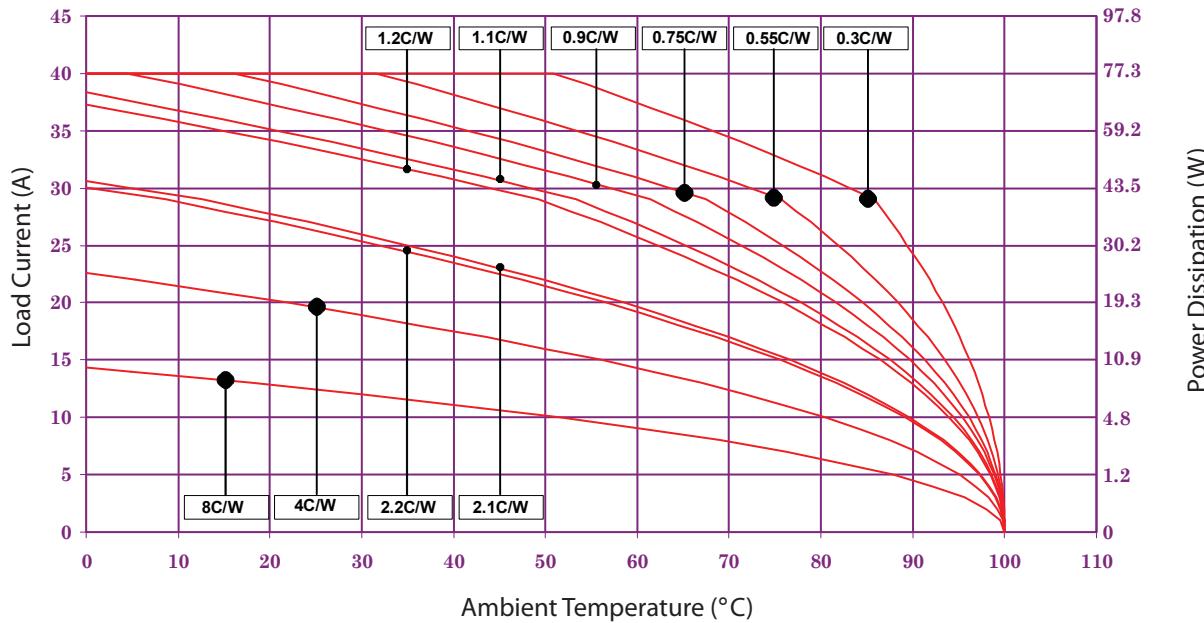


Figure 9a

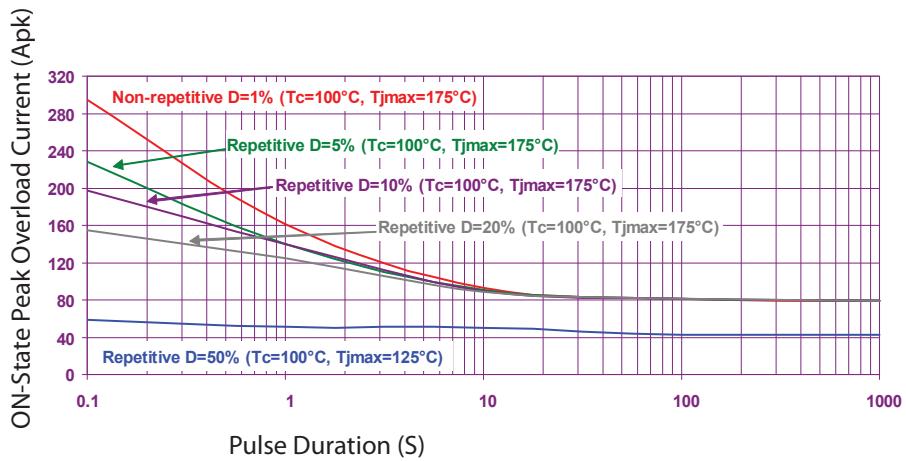
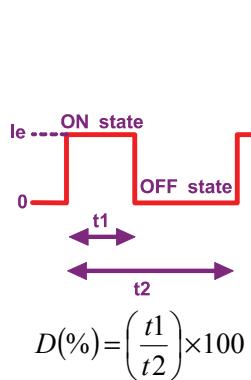


Figure 9b

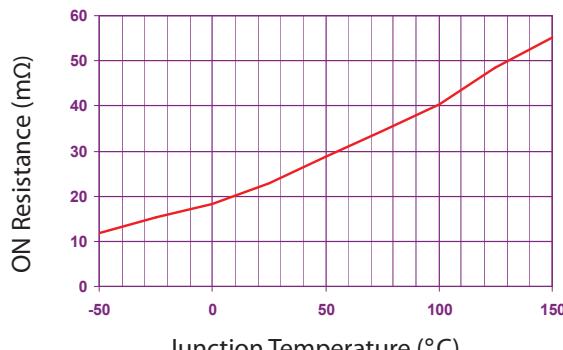


Figure 9c

OUTPUT RELAY CHARACTERISTIC CURVES FOR SH75DC60-16

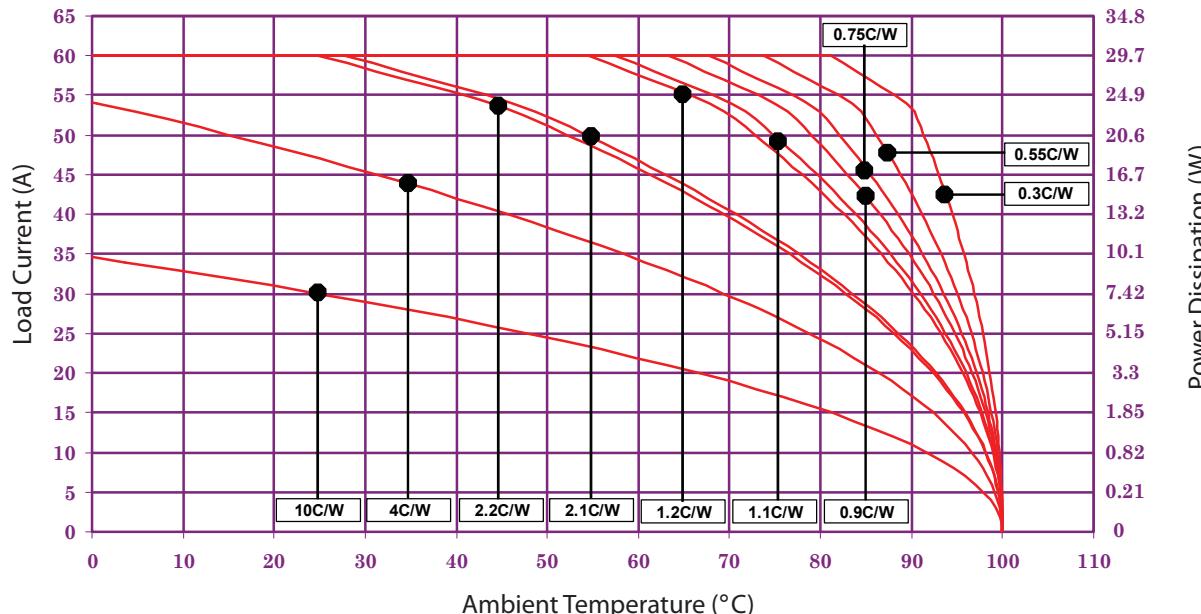


Figure 10a

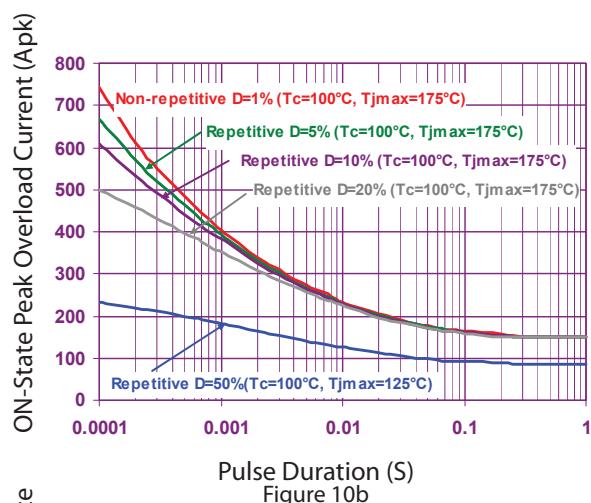


Figure 10b

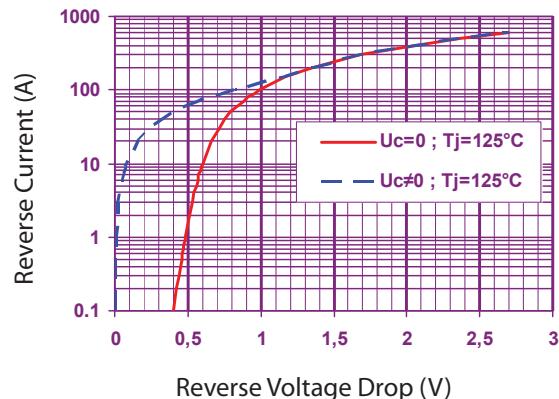


Figure 10c

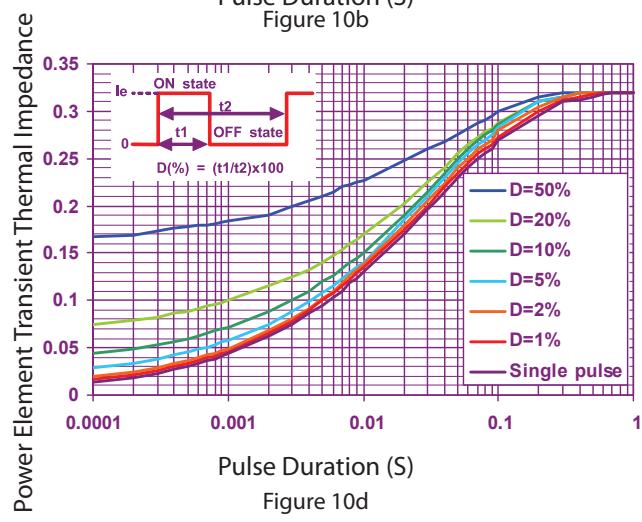


Figure 10d

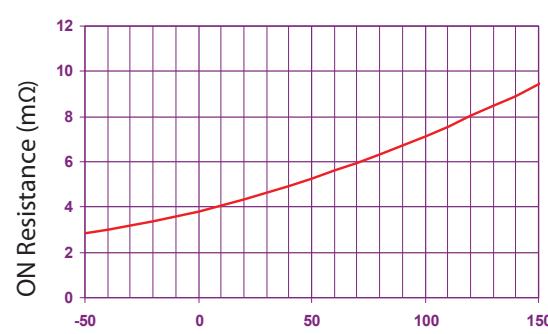


Figure 10e