

# Silicone Cable

## Features

- Multistranded Very Flexible Copper Core
- Wire Gauge: 18AWG
- Double Skin Silicone Insulated
- Bi-Colored Layers

NTE Type No.	Length (Feet / Meters)	Color	Quantity
72-003	328 / 100	Black	1 Roll
72-003-12	1 / .304	Black	10 Pieces
72-004	328 / 100	Blue	1 Roll
72-004-12	1 / .304	Blue	10 Pieces
72-005	328 / 100	Green	1 Roll
72-005-12	1 / .304	Green	10 Pieces
72-006	328 / 100	Red	1 Roll
72-006-12	1 / .304	Red	10 Pieces
72-007	328 / 100	White	1 Roll
72-007-12	1 / .304	White	10 Pieces
72-008	328 / 100	Yellow	1 Roll
72-008-12	1 / .304	Yellow	10 Pieces



## Specifications

**Cable Size:** 1.0mm<sup>2</sup> c.s.a. .142" (3.6mm) Dia. Nom. o/a

**Wire Gauge:** 18AWG

**Multistranded Copper Core:** 7/36/0.071

**IEC1010 Rating:** 1000 Volts CAT3 ☐ 20 Amps


**Temperature Rating:** -10° to +150°C

# Extension Cable Reel

## Features

- Compatible with All Industry Standard 4mm Instrument Sockets & Banana Plug Terminated Test Leads/Probes
- Double Insulated, Bi-Color Silicone Cable Boasts 250+ Copper Strands for Maximum Flexibility and Overall Performance
- Bi-Color Insulation Design Alerts User if Exposed Conductor Shock Hazard is Imminent

NTE Type No.	Color	Description
72-085	Red	Reel contains just over 40 Feet (12 Meters) of Highly Flexible, Double Skinned Silicone Cable. One end of the lead is terminated in a 4mm Right Angled Plug, the other has a 4mm socket into which the original lead is plugged.
72-102	Black	

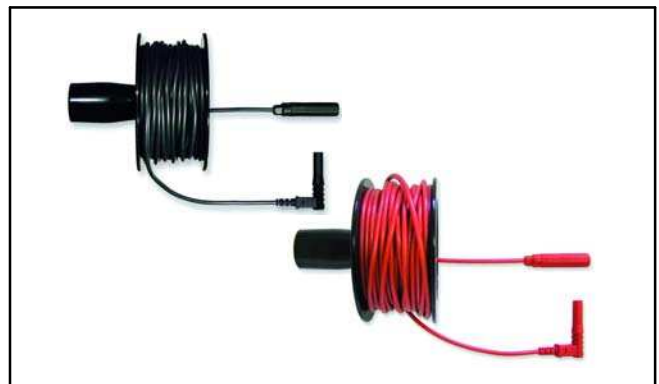

## Specifications

**IEC 1010 Rating:** 1000V CAT3 / 600V CAT4 ☐ 20 Amps

# Special Cross Reference Notes

\$ Insulator sold separately.

@ Original is right angle, replacement is straight.